

# WMC2 SERIES OUTDOOR LIGHTING

WMC2-DL-MCT-BR-DT  
WMC2-DL-MCT-BK-DT  
WMC2-DL-MCT-BN-DT  
WMC2-DL-MCT-WH-DT

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_




**MCT**  
E

Selection:



Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

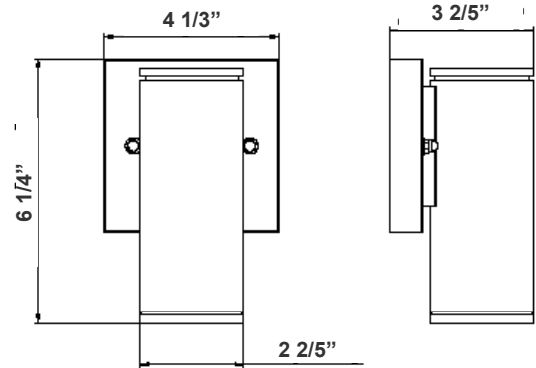

6 1/4"(H) x 4 1/3"(W) x 3 2/5"(D)

## Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 6W
- Efficacy: 66 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location

### Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 400LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Back of the Bracket, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

### Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

### Other Models:

- 12W | 800LM | WMC2-UDL-MCT-BK-DT
- 12W | 800LM | WMC2-UDL-MCT-BR-DT
- 12W | 800LM | WMC2-UDL-MCT-BN-DT
- 12W | 800LM | WMC2-UDL-MCT-WH-DT





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-Z7-26-2Z

**Photometrics:** WMC2-DL-MCT-DT

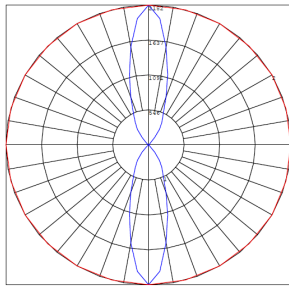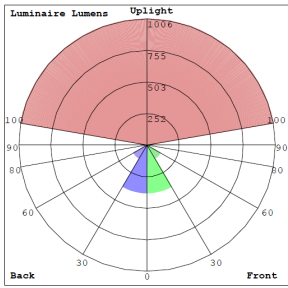

BUG Rating: B1-U5-G0

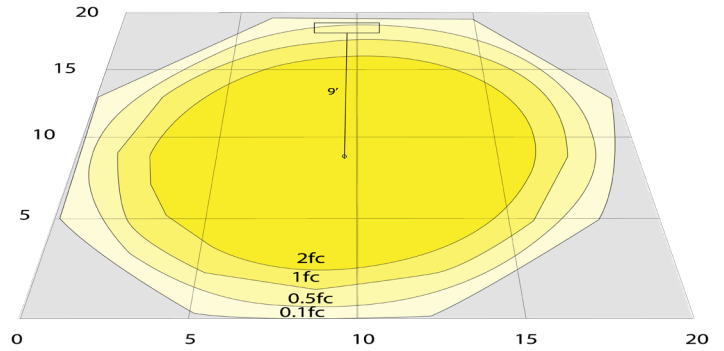

6W 5000K Area 20'x 20' Mounting Height: 9'

**Other Views:**

Bronze Finish:



Side View



Front View



Back View



Lens View

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View



**Performance Table:** WMC2-DL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC2-DL-MCT-BK-DT WMC2-DL-MCT-BR-DT WMC2-DL-MCT-BN-DT WMC2-DL-MCT-WH-DT	6W	120V	400LM	3000K/ 4000K/ 5000K	B1-U5-G0	66

## Sample Ordering

**Model**    **Light Direction**    **Color Temp.**    **Finish**    **Dimming**

WMC2 - DL - MCT -  - DT

BK = Black  
BR = Bronze  
BN = Brushed Nickel  
WH = White

### Factory-Installed Option:

Blank = No Option For Accessories  
OPT-PC-B = FOR 120V-277V PHOTOCELL  
OPT-EM-WMC-EXT-BR/BN/WH/BK = EXTERNAL BACK BOX

### FACTORY-INSTALLED OPTION:



**OPT-PC-B**  
FOR 120V-277V PHOTOCELL



**OPT-EM-WMC-EXT-BR**  
(BN/WH/BK)  
EXTERNAL BACK BOX

