

# WMC3 SERIES OUTDOOR LIGHTING


WMC3-DL-MCT-BK-DT  
WMC3-DL-MCT-BR-DT  
WMC3-DL-MCT-BN-DT  
WMC3-DL-MCT-WH-DT

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

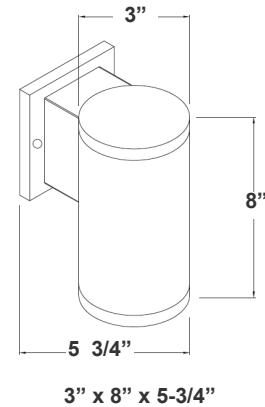

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

## Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.90
- Wattage: 9W
- Efficacy: 72 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location

### Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 650LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

### Applications:




- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

### Other Models:

- 18W | 1300LM | WMC3-UDL-MCT-BK-DT
- 18W | 1300LM | WMC3-UDL-MCT-BR-DT
- 18W | 1300LM | WMC3-UDL-MCT-BN-DT
- 18W | 1300LM | WMC3-UDL-MCT-WH-DT



**Photometrics:** WMC3-DL-MCT

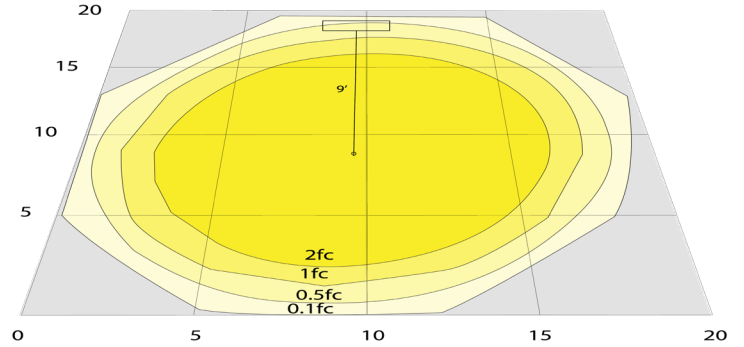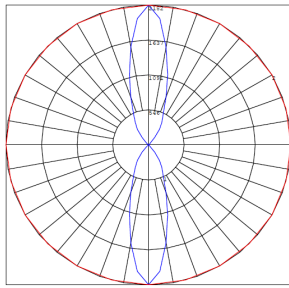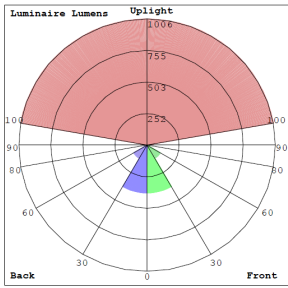

BUG Rating: B1-U5-G0

Area 20'x 20' Mounting Height: 9'

**Other Views:**

Black Finish:



Side View



Front View



Back View



Lens View

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:




Side View



Front View



Back View

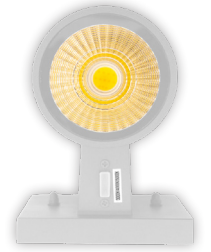

Lens View



**Performance Table:** WMC3-DL-MCT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC3-DL-MCT-BK-DT WMC3-DL-MCT-BR-DT WMC3-DL-MCT-BN-DT WMC3-DL-MCT-WH-DT	9W	120V	650LM	3000K/ 4000K/ 5000K	B1-U5-G0	72

## Sample Ordering

Model	Light Direction	Color Temp.	Finish	Dimming
WMC3	- DL	- MCT	-	- DT

BK = Black  
 BR = Bronze  
 BN = Brushed Nickel  
 WH = White

### Factory-Installed Option:

Blank = No Option For Accessories  
 OPT-PC-B = FOR 120V-277V PHOTOCCELL  
 OPT-EM-WMC-EXT-BR/BN/WH/BK = EXTERNAL BACK BOX

### FACTORY-INSTALLED OPTION:



OPT-PC-B  
FOR 120V-277V PHOTOCCELL



OPT-EM-WMC-EXT-BR  
(BN/WH/BK)  
EXTERNAL BACK BOX

