


# WMC6 SERIES Outdoor Lighting

WMC6-24-UDL-MCTP-BK-DD  
WMC6-24-UDL-MCTP-BR-DD  
WMC6-24-UDL-MCTP-SIL-DD  
WMC6-24-UDL-MCTP-WH-DD

Customer Name: \_\_\_\_\_  
Project Name: \_\_\_\_\_  
Note: \_\_\_\_\_ Type: \_\_\_\_\_

6" LED CYLINDER LIGHTS, 120-277V WITH PHOTOCELL CUP/DOWN LIGHT)  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)

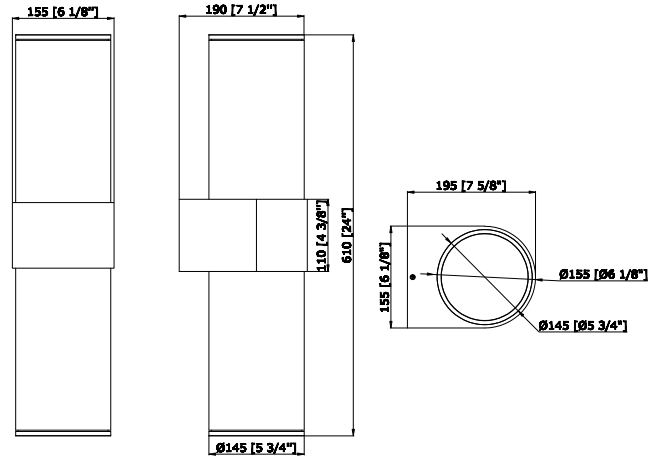

6 1/8" (W) x 7 1/2" (D) x 24" (H)

The 6" LED Cylinder Light offers versatile illumination with both up and down lighting capabilities, perfect for enhancing architectural features in commercial and residential applications. Operating on a wide voltage range of 120-277V, this sleek, energy-efficient fixture includes a photocell for automatic dusk-to-dawn operation. With durable construction and modern aesthetics, it's ideal for outdoor facades, entryways, and walkways, providing reliable, energy-saving lighting that adapts to changing daylight conditions.

## Features

- LED: COB Technology with Prismatic Reflector and Frosted Lens
- Housing: Die-Cast Aluminum
- Outdoor Wall Cylinders
- 7-Year Warranty
- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable Switch Under the Mounting Arm)

## Technical Specifications

### Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: LED COB 2x18W/2x24W/2x30W/
- Power Factor: >0.95
- Efficacy: 80LM/W

### Mechanical:

- Outdoor Wall Cylinders
- Housing: Die-Cast Aluminum
- Uplight/Downlight with ON/OFF Switch
- Finish: Bronze, Silver, White, Black
- 7-year Warranty
- IP65, Providing a Reliable Weather-Tight Seal

### Lighting:



- MCTP: Multi Color Temperature & Multi Power/Wattage (Selectable Switch Under the Mounting Arm)
- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V With Installed Emergency Back up Battery
- Lumens Range: 2880LM/3840LM/4800LM
- LED: COB Technology With Prismatic Reflector and Frosted Lens
- Light Directions: UP and DOWN
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 45° for Each Side
- Rated Life: 70,000 Hrs

### Applications:


- Ideal for general site lighting, walkways and stairways, alleys, loading docks, doorway, pathway and parking areas



**Photometrics:** WMC6-24-UDL-MCTP-DD

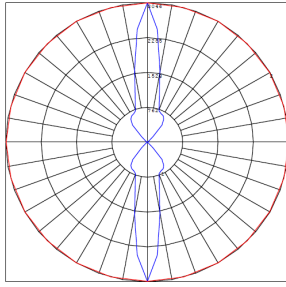

BUD Rating: B1-U5-G0

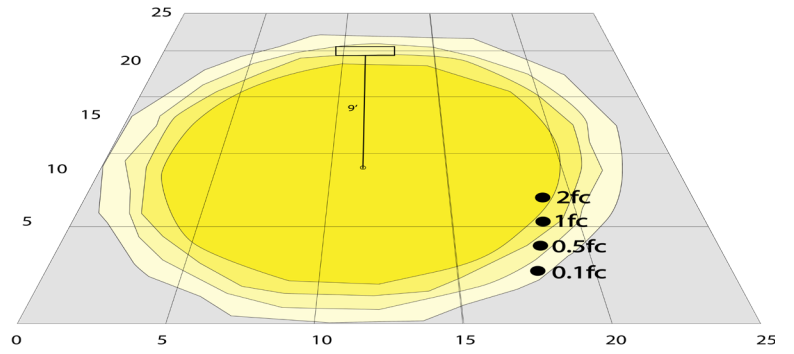

Area 25'x 25' Mounting Height: 9'

**Other Views:**

WMC6-24-UDL-MCTP-BK-DD



Lens View



Side View



Front View



Back View

WMC6-24-UDL-MCTP-BR-DD



Lens View



Side View



Front View



Back View

WMC6-24-UDL-MCTP-SIL-DD



Lens View



Side View




Front View



Back View

WMC6-24UDL-MCTP-WH-DD



Lens View



Side View



Front View



Back View



**Performance Table:** WMC6-24-UDL-MCTP-DD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMC6-24-UDL-MCTP-BK-DD WMC6-24-UDL-MCTP-BR-DD WMC6-24-UDL-MCTP-SIL-DD WMC6-24-UDL-MCTP-WH-DD	2x30W 2x24W 2x18W	120~277V	2880LM 3840LM 4800LM	3000K 4000K 5000K	B1-U5-G0	80

## Sample Ordering

**Model      Size    Light Direction    Color Temp.    Housing Color    Dual Dimming**


WMC6 - 24 - UDL - MCTP -  - DD

BK = Black  
BR = Bronze  
SIL = Silver  
WH = White

### Factory-Installed Options:

Blank = No Option For Accessories  
 OPT-EM-WMC= EMERGENCY BACKUP INTERNAL BATTERY, BACK BOX  
 OPT-227V = FACTORY-INSTALLED OPTION TO CONVERT TO 277V  
 OPT-SEN-WMC= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR

### FACTORY-INSTALLED OPTIONS:



OPT-EM-WMC



OPT-SEN-WMC

