


JOB NAME: \_\_\_\_\_

DATE: \_\_\_\_\_

TYPE: \_\_\_\_\_

**DIMENSIONS:**

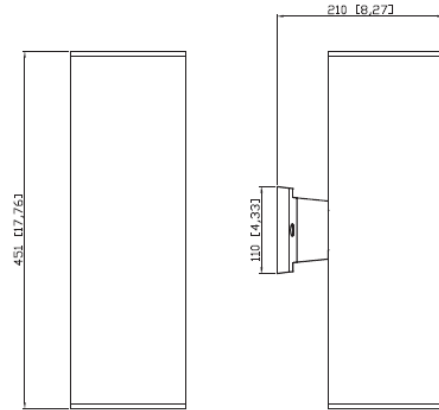

**WMCL-UDL-MCT-BR**  
**WMCL-UDL-MCT-BN**

**LED WALL MOUNT CYLINDER LIGHTS**

Ideal for general site lighting, walkways and stairways, alleys, loading docks, doorway, pathway and parking areas

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120~277VAC
- Wattage: 40W (Up-Down light)
- Power Factor: 0.95
- Efficacy: 80LM/W

**HOUSING SPECIFICATIONS:**

- Outdoor Wall Cylinders
- Housing: Die-cast aluminum
- Finish: Bronze & Brushed Nickel
- Lifespan: 70,000 hr.
- providing a reliable weather-tight seal
- IP Rating: IP65, Suitable for Wet Locations

**CERTIFICATIONS: ETL**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WMCL-UDL-MCT-BR	40W	120~277VAC	3200LM	MCT*
WMCL-UDL-MCT-BN	40W	120~277VAC	3200LM	MCT*

**LIGHTING SPECIFICATIONS:**

- Light directions: UP and DOWN
- Lens: Clear glass
- Total lumens: 3200LM
- Color temperature: MCT: 5000K/4000K/3000K
- Color rendering index: >80

**WARRANTY: 7 years**

