

WMCL SERIES OUTDOOR LIGHTING


WMCL-UDL-MCT-BR-DT
WMCL-UDL-MCT-BN-DT
WMCL-UDL-MCT-WH-DT

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

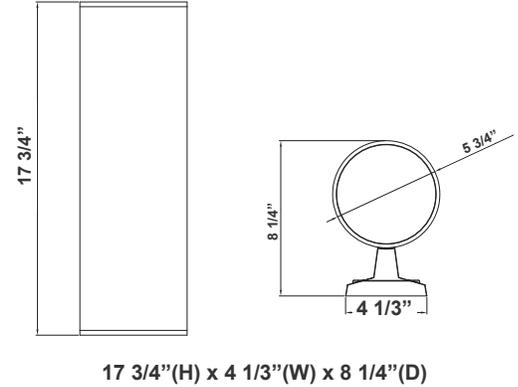

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

Technical Specifications

Electrical:

- Voltage: 120~277V AC
- Power Factor: >0.90
- Wattage: 20W (Down light); 40W (Up/Down light, 20W per end)
- Efficacy: 60 LPW
- THD: <20%

Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Wet Location
- IP Rating: IP44

Lighting:

- Total Lumens: 2400LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

Applications:



- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

Other Models:


- 20W | 1200LM | WMCL-DL-MCT-BK-DT
- 20W | 1200LM | WMCL-DL-MCT-BR-DT
- 20W | 1200LM | WMCL-DL-MCT-BN-DT
- 20W | 1200LM | WMCL-DL-MCT-WH-DT



Photometrics: WMCL-UDL-MCT-DT



BUG Rating: B1-U5-G0

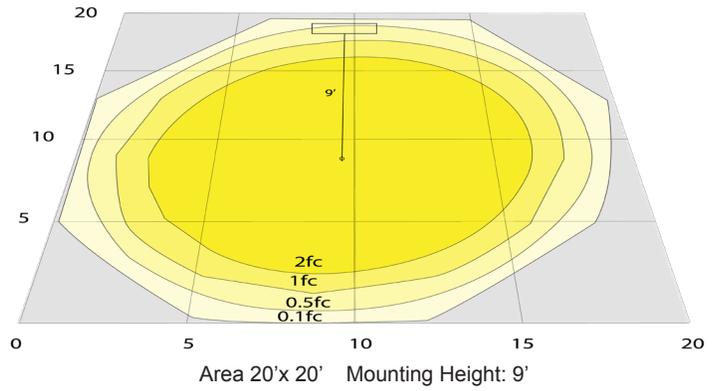

Other Views:

Black Finish:



Side View



Front View



Back View



Lens View

Bronze Finish:



Side View



Front View



Back View



Lens View

Brushed Nickel Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View



Performance Table: WMCL-DL-MCT-DT

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMCL-UDL-MCT-BK-DT	40W	120~277V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	60
WMCL-UDL-MCT-BR-DT	40W	120~277V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	60
WMCL-UDL-MCT-BN-DT	40W	120~277V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	60
WMCL-UDL-MCT-WH-DT	40W	120~277V	2400LM	3000K/ 4000K/ 5000K	B1-U5-G0	60

Sample Ordering

Model	Light Direction	Color Temp.	Finish	Dimming				
WMCL	-	UDL	-	MCT	-	[]	-	DT

BK = Black
 BR = Bronze
 BN = Brushed Nickel
 WH = White

Factory-Installed Option:

Blank = No Option For Accessories
 OPT-PC-B = FOR 120V-277V PHOTOCELL
 OPT-EM-OD1INT = INTERNAL EMERGENCY BACK UP BATTERY

Example:

1. WMCL-UDL-MCT-BR-DT (FOR WMCL 20W DOWN LIGHT MCT BRONZE FIXTURE 120~277V)
2. WMCL-UDL-MCT-BR-DT OPT-PC-B (FOR WMCL 20W DOWN LIGHT MCT BRONZE FIXTURE 120~277V (FOR 120V-277V PHOTOCELL))

FACTORY-INSTALLED OPTION:



OPT-PC-B
FOR 120V-277V PHOTOCELL



OPT-EM-OD1INT
INTERNAL EMERGENCY
BACK UP BATTERY

