

# WMCS5 SERIES OUTDOOR LIGHTING

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

WMCS5-DL-MCT-BK-DD  
WMCS5-DL-MCT-BR-DD  
WMCS5-DL-MCT-BN-DD  
WMCS5-DL-MCT-WH-DD

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_


Note: \_\_\_\_\_

Type: \_\_\_\_\_



**MCT<sub>3</sub>**

Selection:

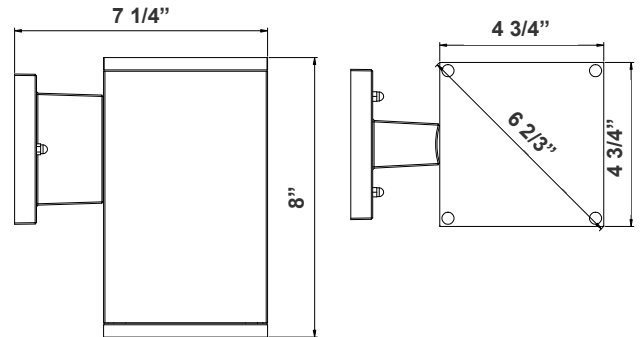

8"(H) x 4 3/4"(W) x 7 1/4"(D)

Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

## Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- 7-Year Warranty
- Outdoor Down Light

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC
- Power Factor: >0.95
- Wattage: 20W
- Efficacy: 80 LPW
- THD: <20%

### Mechanical:

- Housing: Die-cast Aluminum & Glass
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location

### Lighting:

- Dimming: (Dual Function) Triac Dimmable at 120V & 1-10V Dimming at 120-277V
- Total Lumens: 1600LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable Switch on the Bottom of the Arm, Protected by Silicon Cover to be Waterproof)
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 hrs
- Beam angle: 45°

### Applications:

- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

### Other Models:

- 40W | 3200LM | WMCS-UDL-MCT-BK-DD
- 40W | 3200LM | WMCS-UDL-MCT-BR-DD
- 40W | 3200LM | WMCS-UDL-MCT-BN-DD
- 40W | 3200LM | WMCS-UDL-MCT-WH-DD





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com




WG-02152022

## Photometrics: WMCS5-DL-MCT-DD



BUG Rating: B1-U1-G0

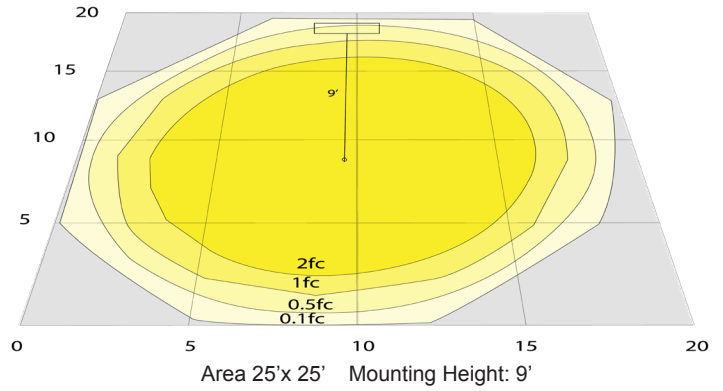

## Other Views:

Black Finish:



Side View



Back View



Lens View

Bronze Finish:



Side View




Back View



Lens View

Brushed Nickel Finish:



Side View



Back View



Lens View

White Finish:



Side View



Back View



Lens View



## Performance Table: WMCS-DL-MCT-DD

| MODEL NO.          | Wattage | Voltage  | Lumens | Color Temp.         | BUG Rating | LPW |
|--------------------|---------|----------|--------|---------------------|------------|-----|
| WMCS5-DL-MCT-BK-DD | 20W     | 120-277V | 1600LM | 3000K/ 4000K/ 5000K | B1-U1-G0   | 80  |
| WMCS5-DL-MCT-BR-DD | 20W     | 120-277V | 1600LM | 3000K/ 4000K/ 5000K | B1-U1-G0   | 80  |
| WMCS5-DL-MCT-BN-DD | 20W     | 120-277V | 1600LM | 3000K/ 4000K/ 5000K | B1-U1-G0   | 80  |
| WMCS5-DL-MCT-WH-DD | 20W     | 120-277V | 1600LM | 3000K/ 4000K/ 5000K | B1-U1-G0   | 80  |

## Sample Ordering

| Model | Light Direction |    | Color Temp. | Finish | Dimming |    |
|-------|-----------------|----|-------------|--------|---------|----|
| WMCS5 | -               | DL | -           | MCT    | -       | DD |

BK = Black  
 BR = Bronze  
 BN = Brushed Nickel  
 WH = White

### Factory-Installed Option:

Blank = No Option For Accessories

OPT-PC-B = FOR 120V-277V PHOTOCELL

OPT-EM-WMC = INTERNAL EMERGENCY BACK UP BATTERY

### FACTORY-INSTALLED OPTION:



**OPT-PC-B**  
FOR 120V-277V PHOTOCELL



**OPT-EM-WMC**  
INTERNAL EMERGENCY  
BACK UP BATTERY

