



DIMENSIONS:


18.25"(W) x 9"(H) x 9.25"(D)



Non-cutoff optics with wide forward throw distribution is ideal for extended spacing to mounting height ratio



WML-120CW-LG WML-120NW-LG WML-120WW-LG



1/2" threaded hubs located on the back, rear, and side of housing for greater mounting versatility. Ideal for 1/2" photoelectric control mounting

LED NON-CUTOFF WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Provides crisp, directional light.

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-120CW-LG	127W	120~277V AC	12000 LM	5000K
WML-120NW-LG	127W	120~277V AC	12000 LM	4000K
WML-120WW-LG	127W	120~277V AC	12000 LM	3000K

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 127W
- Input Voltage: 120-277VAC 50/60Hz
- Input Current: 1.2A Max
- Other wattages: 30W, 50W, 60W, 80W
- Power factor: >0.9
- Efficacy: 95 LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Borosilicate glass lens will not yellow or fade

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Lumileds LEDs
- Total lumens: 12000 LM
- LED Quantity: 176 pieces
- Color temperature: 3000K, 4000K and 5000K
- Color rendering index: >80
- Beam angle: 90°

WARRANTY: 5 years



WML-120CW-LG WML-120NW-LG WML-120WW-LG

LED NON-CUTOFF WALL PACK


CERTIFICATIONS: UL



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-120CW-LG	127W	120~277V AC	12000 LM	5000K
WML-120NW-LG	127W	120~277V AC	12000 LM	4000K
WML-120WW-LG	127W	120~277V AC	12000 LM	3000K

PHOTOMETRICS:

Spectral Power Distribution & Chromaticity Diagram

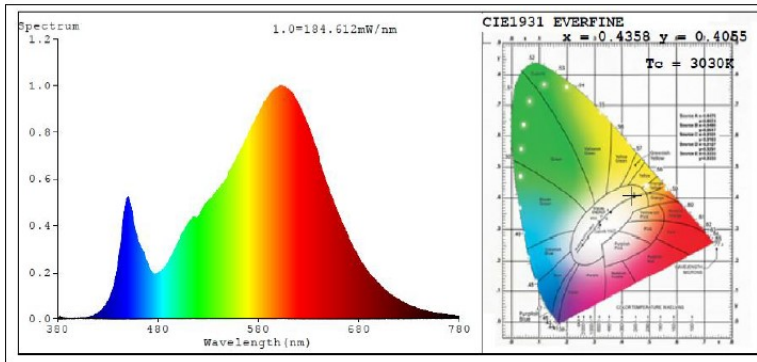


Illuminance Plots


	Illuminance at a Distance		
	Center Beam fc	Beam Width	
17.0ft	13.63 fc	36.6 ft	31.0 ft
34.0ft	3.41 fc	73.2 ft	61.9 ft
51.0ft	1.51 fc	109.8 ft	92.9 ft
68.0ft	0.85 fc	146.3 ft	123.9 ft
85.0ft	0.55 fc	182.9 ft	154.8 ft
102.0ft	0.38 fc	219.5 ft	185.8 ft

■ Vert. Spread: 94.2°
■ Horiz. Spread: 84.7°

ISOLUX DIAGRAM

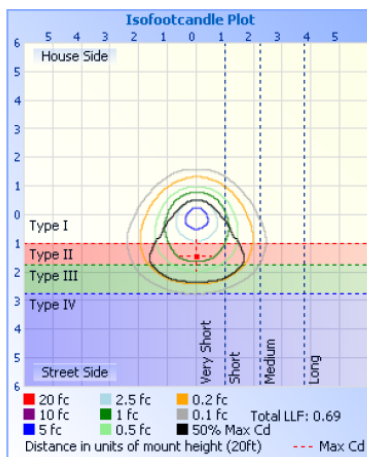

Photometric Data

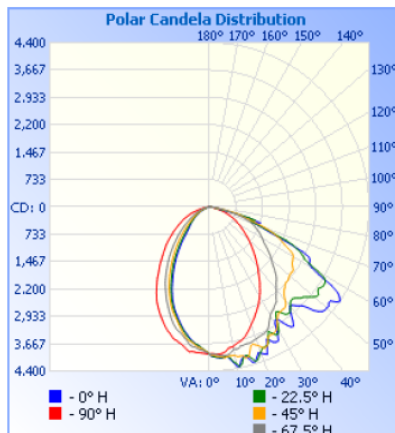

ISOCANDELA DIAGRAM

