



DIMENSIONS:

13.25"(W) x 9.5"(H) x 7.5"(D)



Non-cutoff optics with wide forward throw distribution is ideal for extended spacing to mounting height ratio



1/2" threaded hubs located on the back, rear, and side of housing for greater mounting versatility. Ideal for 1/2" photoelectric control mounting

WML-50CW
WML-50NW
WML-50WW

LED NON-CUTOFF WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Provides crisp, directional light.

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-50CW	50W	120~277V AC	5400 LM	5000K
WML-50NW	50W	120~277V AC	5300 LM	4000K
WML-50WW	50W	120~277V AC	5200 LM	3000K

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 50W
- Input Voltage: 120-277VAC 50/60Hz
- Input current: 0.6A Max
- Other wattages: 30W, 60W, 80W, 127W
- Power factor: >0.9
- Efficacy: 104 LM/W~108 LM/W

LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Lumileds LEDs
- Total lumens: 5200 LM, 5300 LM and 5400 LM
- LED Quantity: 70 pieces
- Color temperature: 3000K, 4000K and 5000K
- Color rendering index: >80
- Beam angle: 90°

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Borosilicate glass lens will not yellow or fade

WARRANTY: 5 years

CERTIFICATIONS: UL, DLC



WML-50CW WML-50NW WML-50WW

LED NON-CUTOFF WALL PACK


CERTIFICATIONS: UL, DLC




MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-50CW	50W	120~277V AC	5400 LM	5000K
WML-50NW	50W	120~277V AC	5300 LM	4000K
WML-50WW	50W	120~277V AC	5200 LM	3000K

PHOTOMETRICS:


Spectral Power Distribution & Chromaticity Diagram

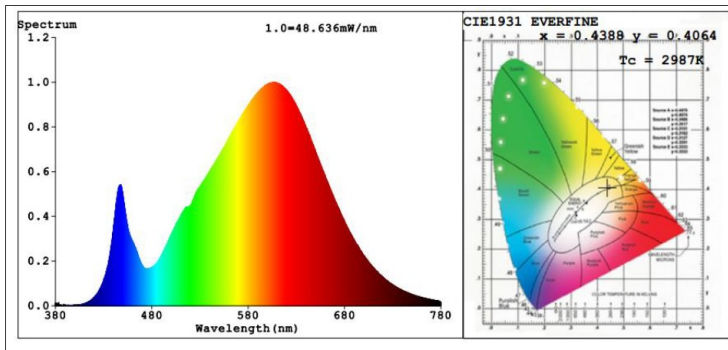


Illuminance Plots

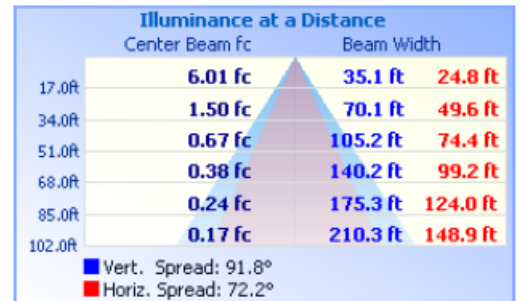

ISOCANDELA DIAGRAM

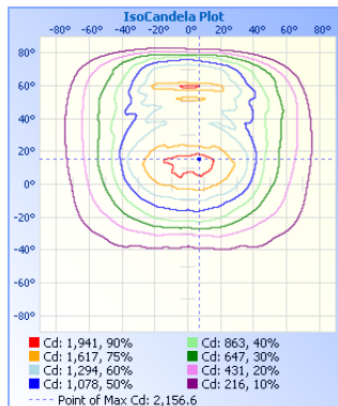

Photometric Data

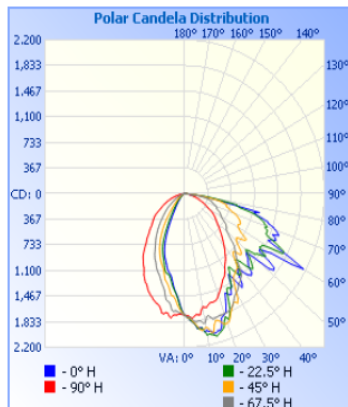

ISOLUX DIAGRAM

