



## DIMENSIONS:

13.25"(W) x 9.5"(H) x 7.5"(D)



Non-cutoff optics with wide forward throw distribution is ideal for extended spacing to mounting height ratio



1/2" threaded hubs located on the back, rear, and side of housing for greater mounting versatility. Ideal for 1/2" photoelectric control mounting

## WML-60CW WML-60NW WML-60WW

### LED NON-CUTOFF WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Provides crisp, directional light.

#### ELECTRICAL SPECIFICATIONS:

- Input Wattage: 60W
- Input Voltage: 120-277VAC 50/60Hz
- Input current: 0.8A Max
- Other wattages: 30W, 50W, 80W, 127W
- Power factor: >0.9
- Efficacy: 104 LM/W~110 LM/W

#### HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Operating temperature: -4°F ~ 104°F
- Lifespan: 50000 Hrs.
- IP rating: IP65, Wet Locations
- Borosilicate glass lens will not yellow or fade

#### CERTIFICATIONS: UL, DLC



#### LIGHTING SPECIFICATIONS:

- LED type/brand: SMD 3030/ Philips Lumileds LEDs
- Total lumens: 6200 LM, 6400 LM and 6600 LM
- LED Quantity: 70 pieces
- Color temperature: 3000K, 4000K and 5000K
- Color rendering index: >80
- Beam angle: 90°

#### WARRANTY: 5 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-60CW	60W	120~277V AC	6600 LM	5000K
WML-60NW	60W	120~277V AC	6400 LM	4000K
WML-60WW	60W	120~277V AC	6200 LM	3000K



## WML-60CW WML-60NW WML-60WW

### LED NON-CUTOFF WALL PACK


#### CERTIFICATIONS: UL, DLC



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-60CW	60W	120~277V AC	6600 LM	5000K
WML-60NW	60W	120~277V AC	6400 LM	4000K
WML-60WW	60W	120~277V AC	6200 LM	3000K

#### PHOTOMETRICS:

##### Spectral Power Distribution and Chromaticity Diagram

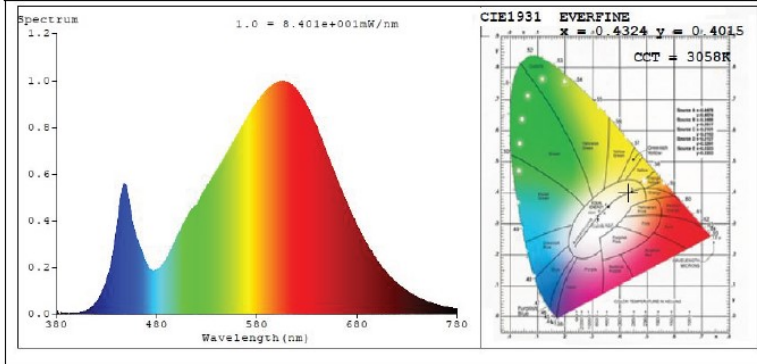

##### Illuminance Plots

Height	Illuminance at a Distance	
	Center Beam fc	Beam Width
17.0ft	7.24 fc	36.9 ft 29.5 ft
34.0ft	1.81 fc	73.8 ft 58.9 ft
51.0ft	0.80 fc	110.7 ft 88.4 ft
68.0ft	0.45 fc	147.6 ft 117.8 ft
85.0ft	0.29 fc	184.5 ft 147.3 ft
102.0ft	0.20 fc	221.4 ft 176.7 ft

■ Vert. Spread: 94.7°  
■ Horiz. Spread: 81.8°

##### Photometric Data

