




DIMENSIONS:

18.29"(W) x 9.09"(H) x 9.4"(D)

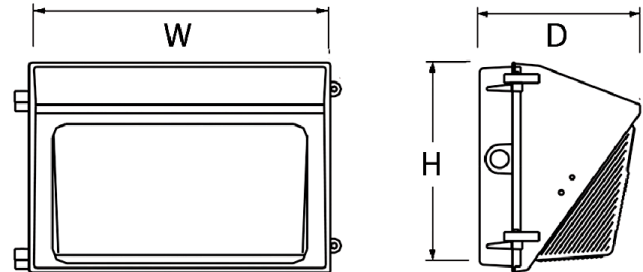

WML-HL-120W-50K WML-HL-120W-40K WML-HL-120W-30K

LED NON-CUTOFF WALL PACK

Ideal for general site lighting, alleys, loading docks, doorway, pathway and parking areas. Provides crisp, directional light.

ELECTRICAL SPECIFICATIONS:

- Input Wattage: 120W
- Input Voltage: 120-277VAC 50/60Hz
- Input current: 0.52A
- Power factor: >0.9
- Efficacy: 143LM/W

HOUSING SPECIFICATIONS:

- Die-cast aluminum with powder coat finish (Dark Bronze)
- Same footprint as traditional HID wall packs
- Four 1/2" hubs: 1 top, 1 on each side, 1 rear
- Mounting: Wall Mounting
- Operating temperature: -4°F ~ 104°F
- Lifespan: 70000 Hrs.
- IP rating: IP64, Wet Locations

CERTIFICATIONS: UL



LIGHTING SPECIFICATIONS:

- Dimming: 0~10V Dimmable
- Lens: Prismatic borosilicate glass lens
- Chip: LUMILEDS LED
- Total lumens: 16800LM/17000LM/17160LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80

WARRANTY: 7 years

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-HL-120W-50K	120W	120~277V AC	17160LM	5000K
WML-HL-120W-40K	120W	120~277V AC	17000LM	4000K
WML-HL-120W-30K	120W	120~277V AC	16800LM	3000K



WML-HL-120W-50K
WML-HL-120W-40K
WML-HL-120W-30K

LED NON-CUTOFF WALL PACK

PHOTOMETRIC:

MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
WML-HL-120W-50K	120W	120~277V AC	17160LM	5000K
WML-HL-120W-40K	120W	120~277V AC	17000LM	4000K
WML-HL-120W-30K	120W	120~277V AC	16800LM	3000K

