

WML2 SERIES Outdoor Lighting


WML2-150W-30K-LG
WML2-150W-40K-LG
WML2-150W-50K-LG

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

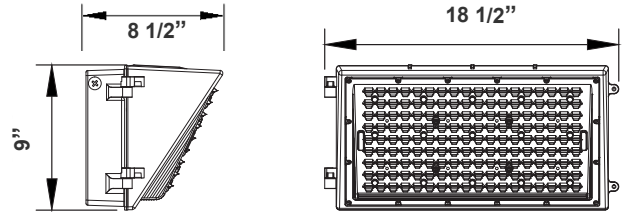

Selection:



18 1/2"(W) x 9"(H) x 8 1/2"(D)

This is a LED Non-Cutoff 2nd Generation Wall Pack outdoor lighting, ideal for general site lighting, alleys, loading docks, doorway, pathway, and parking areas.

Features

- Four 1/2" Knockout: 1 Top, 1 on Each Side, 1 Rear
- TIR Optic Lens - TYPE III
- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 150W
- Power Factor: >0.95
- Efficacy: 118/ 123/ 128 LPW

Mechanical:

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- TIR Optic Lens - TYPE III
- Same Footprint as Traditional HID Wall Packs
- Operating Temperature: -40°F to 104°F
- Four 1/2" Knockout: 1 Top, 1 on Each Side, 1 Rear
- 7-Year Warranty
- IP 65, Suitable for Wet Locations

Lighting:

- Chip: Lumileds LEDs
- Polycarbonate Optic Lens
- Dimmable: 0~10V Dimming
- Total Lumens: 17700LM/ 18450LM/ 19200LM
- Color Temperatures: 3000K/ 4000K/ 5000K
- Color Rendering Index: CRI ≥ 80
- Rated life: 70,000 Hrs

Applications:



- General site Lighting
- Alleys
- Loading docks
- Doorways
- Pathways
- Parking areas

Other Models:


• 28W | 3500LM | WML2-28W-30K-HL-SM • 48W | 6000LM | WML2-50W-30K-HL • 50W | 5500LM | WML2-50W-30K-SM • 120W | 15000LM | WML2-120W-30K-HL • 150W | 15000LM | WML2-150W-30K-HL
• 28W | 3640LM | WML2-28W-40K-HL-SM • 48W | 6240LM | WML2-50W-40K-HL • 50W | 5750LM | WML2-50W-40K-SM • 120W | 15600LM | WML2-120W-40K-HL • 150W | 15600LM | WML2-150W-40K-HL
• 28W | 3780LM | WML2-28W-50K-HL-SM • 48W | 6480LM | WML2-50W-50K-HL • 50W | 6000LM | WML2-50W-50K-SM • 120W | 16200LM | WML2-120W-50K-HL • 150W | 16200LM | WML2-150W-50K-HL



Photometrics: WML2-150W-LG



BUD Rating: B3-U4-G4

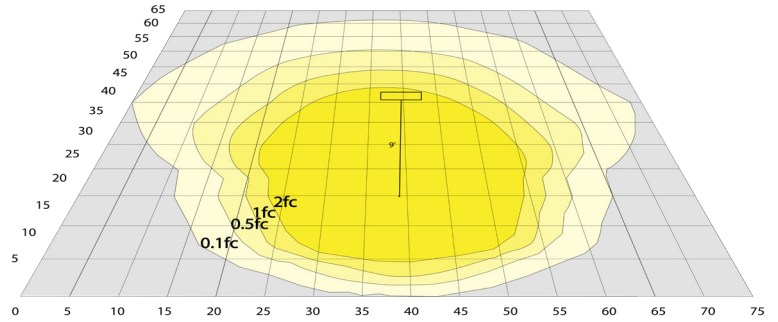

Area 65'x 75' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: WML2-150W-LG

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WML2-150W-30K-LG	150W	120~277V	17700LM	3000K	B3-U4-G4	118
WML2-150W-40K-LG	150W	120~277V	18450LM	4000K	B3-U4-G4	123
WML2-150W-50K-LG	150W	120~277V	19200LM	5000K	B3-U4-G4	128

Sample Ordering

Model Wattage Color Temp. Housing Size

WML2 - 150W - - LG

3000K
4000K
5000K

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-OD2INT= INTERNAL EMERGENCY BACKUP BATTERY

OPT-SEN-3MRLV-5= PROGRAMMABLE MICROWAVE BI-LEVEL

OPT-CLR-95= COLOR PAINT

OPT-PC-B = PHOTOCELL 120-277V

WEC-8RC = OPTIONAL REMOTE

OPT-TRS-T20 = TAMPER RESISTANT SCREW

FACTORY-INSTALLED OPTIONS:



OPT-EM-OD2INT



WEC-8RC



OPT-PC-B



OPT-SEN-3MRLV-5

Example:

1. WML2-150W-50K-HL

(FOR WML2 120W 5000K FIXTURE 120-277V)

2. WML2-150W-50K-HL
OPT-EM-OD2INT

(FOR WML2 120W 5000K FIXTURE 120-277V)
(EMERGENCY BACKUP BATTERY, BACK BOX)

