
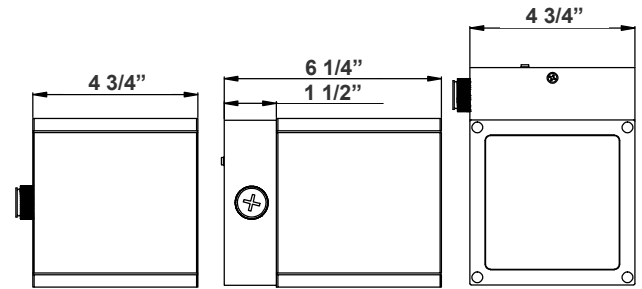


WMCS5 SERIES OUTDOOR LIGHTING

WMQ5-UDL-MCTP-BK-P
WMQ5-UDL-MCTP-BR-P
WMQ5-UDL-MCTP-BN-P
WMQ5-UDL-MCTP-WH-P
UP-DOWN SELECTABLE CUBE WALL LIGHT

MCTP Multi Color Temperature (Selectable)

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____



6 1/4"(H) x 4 3/4"(W) x 4 3/4"(D)

Versatile and stylish, our UP-DOWN Selectable Cube Wall Light offers selectable wattage and color temperatures. Its dual-directional lighting enhances architectural features, while the modern design suits various settings. Durable and easy to install, it's perfect for residential, commercial, and industrial applications.

Features

- Finish: Black, Bronze, Brushed Nickel & White
- Multi CCT (Selectable The Switch is On The Side of the Housing)
- 7-Year Warranty
- Outdoor UP/Down Light

Technical Specifications

Electrical:

- Voltage: 120-277V AC
- Power Factor: >0.95
- Wattage: 6W/12W/15W/18W(Half on Each Side)
- Efficacy: 104 LPW
- THD: <20%

Mechanical:

- Housing: Die-Cast Aluminum with Glass Lens
- DC Button Photocell with ON/OFF switch Included
- Finish: Black, Bronze, Brushed Nickel & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location
- 7-Year Warranty

Lighting:



- Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 1500LM
- Color Temperatures: 3000K/4000K/5000K
- Multi CCT (Selectable The Switch is On The Side of the Housing)
- Color Rendering Index: CRI ≥ 80
- Rated Life: 70,000 Hrs
- Beam Angle: 45° for Each Side

Applications:


- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas



Photometrics: WMQ5-UDL-MCTP-P

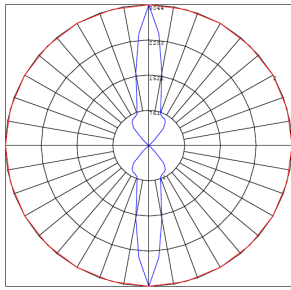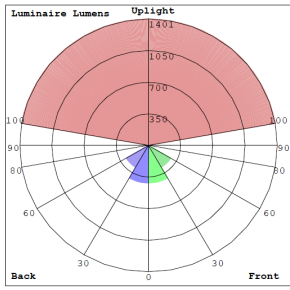

BUG Rating: B1-U5-G0

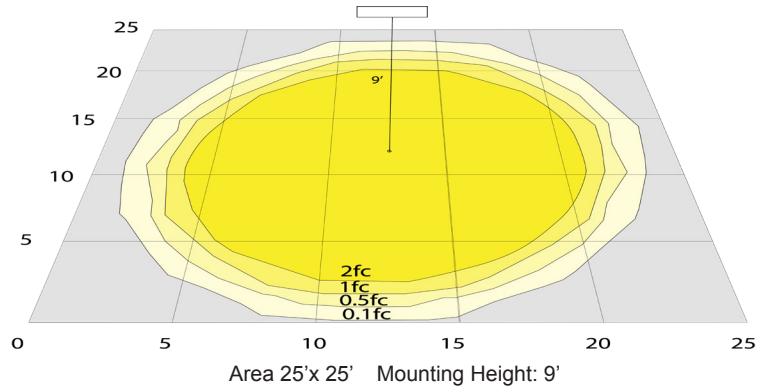

Other Views:

Black Finish:



Side View



Back View



Back View

Bronze Finish:



Side View



Back View




Back View

Brushed Nickel Finish:



Side View



Back View



Back View


White Finish:



Side View



Back View



Back View



Performance Table: WMCS5-UDL-MCT-DD

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMQ5-UDL-MCTP-BK-P	6W 12W 15W 18W	120-277V	624LM 1248LM 1560LM 1872LM	3000K/4000K/5000K	B1-U5-G0	104
WMQ5-UDL-MCTP-BR-P						
WMQ5-UDL-MCTP-BN-P						
WMQ5-UDL-MCTP-WH-P						

Sample Ordering

Model	Light Direction	Color Temp.	Finish	Photocell				
WMQ5	-	UDL	-	MCTP	-		-	P

BK = Black
BR = Bronze
BN = Brushed Nickel
WH = White

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-WMQ5-BK= FACTORY-INSTALLED EM IN AN EXTENSION BACK BOX - BLACK
 OPT-EM-WMQ5-WH = FACTORY-INSTALLED EM IN AN EXTENSION BACK BOX - WHITE
 OPT-EM-WMQ5-BN = FACTORY-INSTALLED EM IN AN EXTENSION BACK BOX - BRUSHED NICKEL
 OPT-EM-WMQ5-BR = FACTORY-INSTALLED EM IN AN EXTENSION BACK BOX - BRONZE

FACTORY-INSTALLED OPTION:



OPT-EM-WMQ5
INTERNAL EMERGENCY
BACK UP BATTERY

