WPMX SERIES Outdoor Lighting

WPMX-48-80W-MCTP-SR WPMX-48-80W-MCTP-BK

WPMX-48-80W-MCTP-WH

WPMX-48-80W-MCTP-SIL

HALF-MOON WALL PACK-POWER & CCT ADJUSTABLE


Multi Color Temperature & Multi Power/Wattage (Selectable)




Customer Name:

Project Name:

Note: Type:









LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.

Features

- High Light Transmittance, Anti-UV and Fire Resistant PC Lens
- 7-Year Warranty

- Die-Cast Aluminum With Powder Coat Finish (Dark Bronze)
- Multi CCT and Power (Switches are inside fixture)

Technical Specifications

Electrical:

Voltage: 120-277VAC 60Hz
Wattage:48W/64W/80W
Power Factor: >0.95
Efficacy: 135 LPW

Mechanical:

- DC Button Photocell with ON/OFF switch Included
- Die-Cast Aluminum With Powder Coat Finish
- High Light Transmittance, Anti-UV and Fire Resistant Shatterproof PC Lens
- Operating Temperature: -4°F to 104°F
- Full Cutoff, Dark Sky Compliant
- IP 65,Wet Location
- 7-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power (Switches are inside fixture)
- The Type III Distribution Is Used for Wide WalkWays, on Ramps and Entrance Roadways, As Well As Other Long, Narrow Lighting
- Total Lumens: 10800LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Rated Life: 70,000 Hrs

Applications:

 LED Wall Pack Light series can be widely used as Exterior or Interior LED lighting for Hotels, Garages, Commercial Buildings, Public areas, Schools and Hospitals, etc.















Photometrics: WPMX-48-80W-MCTP-SR



BUD Rating: B0-U0-G1

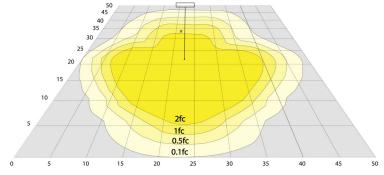

Area 45'x 50' Mounting Height: 9'

Other Views:



Side View



Side View



Side View





Front View



Front View



Front View





Back View



Back View



Back View



Front View Back View

Performance Table: WPMX-48-80W-MCTP-SR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WPMX-48-80W-MCTP-SR WPMX-48-80W-MCTP-BK WPMX-48-80W-MCTP-SIL WPMX-48-80W-MCTP-WH	48W 64W 80W	120~277V	6400LM 8640LM 10800LM	3000K 4000K 5000K	B0-U0-G1	135

Sample Ordering

Wattage. Wattage. Color Temp. Finishes Model

WPX 48 80W **MCTP**

Factory-Installed Options:

BK = Black SIL = Silver WH = White

SR = Bronze

Blank = No Option For Accessories WEC-8RC = OPTIONAL REMOTE OPT-EM-WPMX-48 = INTERNAL BACK UP BATTERY OPT-CLR-85(BK/GR/SR/WH) = PAINT OPT-SEN-3MRLV-5 = PROGRAMMABLE MICROWAVE (BI-LEVEL FOR 80W) OPT-CLR-MC (260 SET UP FEE PER PROJECT) = PAINT OPT-TRS-T20 = TAMPER RESISTANT SCREW OPT-WP-480V = CHANGE VOLTAGE

FACTORY-INSTALLED OPTIONS:





OPT-PC-B

WEC-8RC





WEC-SEN-3MRLV-5

OPT-EM-WPMX-48







COLOR CHART: * Choose from one of our Premium Colors with no set-up fee.

Gloss:



SILVER METALLIC 70 GLOSS T357-GR105



SILVER METALLIC 30 GLOSS T353-GR06



DARK RED 90 **GLOSS** P009-RD02



INTERNATIONAL **ORANGE 90** GLOSS T009-OG26



SAFETY ORANGE 90 GLOSS T009-OG01



YELLOW 90 GLOSS T009-YL14



YELLOW 90 GLOSS T009-YL01



TRAFFIC GREEN 70 GLOSS T007-GN16



GREEN 70 GLOSS T007-GN13



GREEN 60 GLOSS C006-GN03



BLUE 90 GLOSS T009-BL01



DARK BLUE 80 GLOSS T008-BL20



RAL 8028 TERRA **BROWN 90 GLOSS** C209-BR358

Hammer:



WHITE HAMMER T013-WH09



BEIGE HAMMER T013-BG38



GREY HAMMER C013-GR08



SILVER HAMMERTONE T064-GR05



BLACK HAMMER T013-BK62



RED HAMMER T013-RD15



GREEN HAMMER T013-GN220



BLUE HAMMER T013-BL468



BRONZE HAMMER T012-BR161

Texture:



WHITE TEXTURE C031-WH120



FLINT GRAY TEXTURE T243-GR522



BLACK TEXTURE C241-BK109



RED TEXTURE T241-RD129



BLUE TEXTURE C241-BL544



OIL RUBBED **BRONZE TEXTURE** T291-BR251

Vein:



BLACK/WHITE VEIN T075-WH34



SILVER VEIN T375-BK26



COPPER VEIN **EXTERIOR** T075-BK211



GOLD VEIN T375-BK10



COPPER VEIN T375-BK07



