## WSO SERIES Outdoor Lighting

WSO-20-40W-MCTP-HAD DECORATIVE HORIZONTAL ARM

Mattage (Selectable) Multi Power/Wattage (Selectable)



LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.




Type:

**Customer Name:** 

Project Name:

Note:



10 1/4"(W) x 15"(H) x 12 1/2"(D)

## **Features**

- Aluminum Housing and Steel Back Plate
- White Glass Lens

- 7-Year Warranty
- Multi CCT Power Switch is Inside Fixture

## **Technical Specifications**

#### **Electrical:**

Voltage: 120-277V AC 60Hz
Wattage: 20W/30W/40W
Power Factor: >0.90
Efficacy: 100 LPW

#### **Mechanical:**

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

#### Lighting:

- Dimming: Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 4000LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
   Rated life: 70,000 Hrs

### **Applications:**

 LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.












#### Photometrics: wso-20-40W-MCTP-HDA





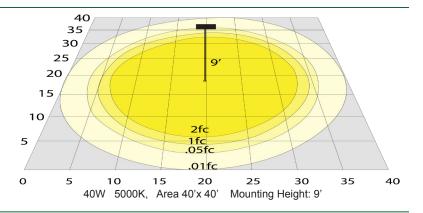

#### **Other Views:**





Side View

Back View

### Performance Table: wso-20-40W-MCTP-HDA

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WSO-20-40W-MCTP-HDA	20W 30W 40W	120V	2000LM 3000LM 4000LM	3000K 4000K 5000K	B2-U1-G1	100

# Sample Ordering

Model Min. Watt Max. Watt Color Temp. Housing

WSO = 20 = 40W = MCTP = HDA



