




Photometrics: WSX-20-40W-MCTP-45DA

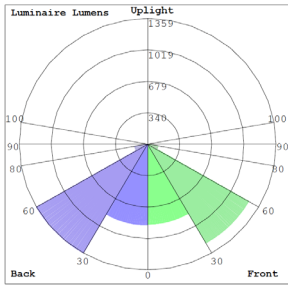

BUD Rating: B2-U1-G1

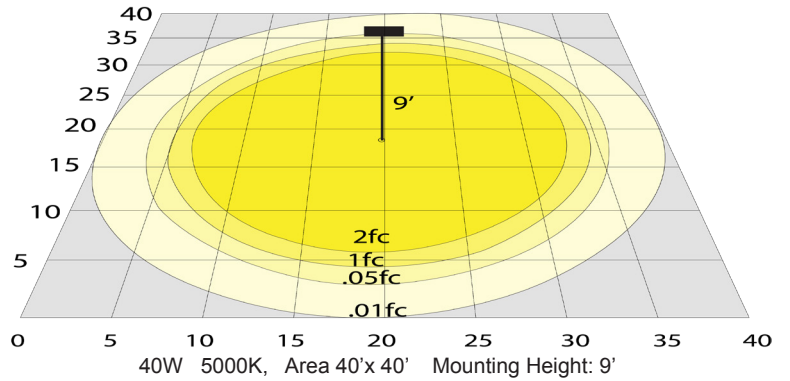

Other Views:



Side View



Lens View



Back View

Performance Table: WSX-20-40W-MCTP-45DA

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WSX-20-40W-MCTP-45DA	20W 30W 40W	120V	2000LM 3000LM 4000LM	3000K 4000K 5000K	B2-U1-G1	100

Sample Ordering

Model Min. Watt Max. Watt Color Temp. Housing

WSX - 20 - 40W - MCTP - 45DA

Accessories:

Blank = No Option For Accessories
 WSX-RL-WH = WSX Original White Lens Replacement (Default Lens)
 WSX-RL-FR = WSX Optional Frosted Lens
 WSX-RL-AB = WSX Optional Alabaster Lens

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-WSX-WG = Factory-Installed Wire Guard
 OPT-PC-BUM = Button Photocell
 OPT-EM-WSX = Factory-Installed EM with Back Box
 OPT-SEN-WSX = Factory-Installed BI-Level Motion Sensor Installed with Back Box

ACCESSORIES:



WSX-RL-WH

WSX-RL-FR

WSX-RL-AB

FACTORY-INSTALLED OPTIONS:



OPT-PC-BUM

OPT-WSX-WG



OPT-EM-WSX

OPT-SEN-WSX

Back Box Dimensions: 7" x 1.6"

