




Photometrics: WSX-20-40W-MCTP-HDA

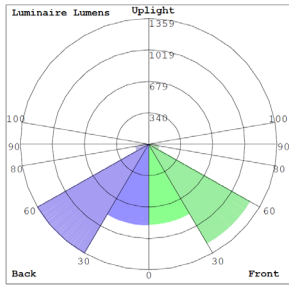

BUD Rating: B2-U1-G1

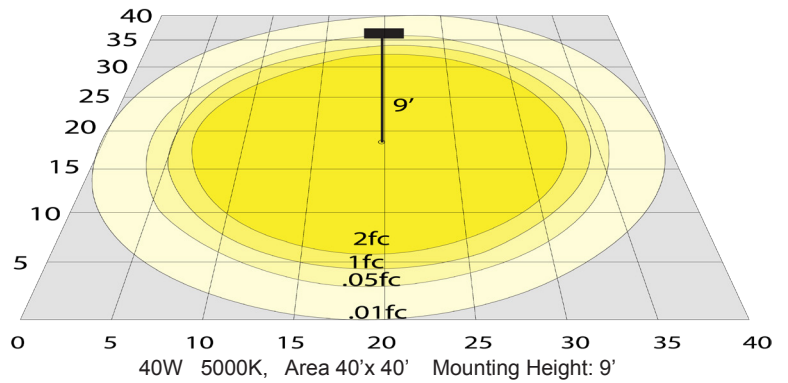

Other Views:



Side View



Lens View



Back View

Performance Table: WSX-20-40W-MCTP-HDA

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WSX-20-40W-MCTP-HDA	20W 30W 40W	120V	2000LM 3000LM 4000LM	3000K 4000K 5000K	B2-U1-G1	100

Sample Ordering

Model	Min. Watt	Max. Watt	Color Temp.	Housing	Size
WSX	20	40W	MCTP	HDA	

Accessories:

Blank = No Option For Accessories
 WSX-RL-WH = WSX Original White Lens Replacement (Default Lens)
 WSX-RL-FR = WSX Optional Frosted Lens
 WSX-RL-AB = WSX Optional Alabaster Lens

Factory-Installed Options:

Blank = No Option For Accessories
 OPT-WSX-WG = Factory-Installed Wire Guard
 OPT-PC-BUM = Button Photocell
 OPT-EM-WSX = Factory-Installed EM with Back Box
 OPT-SEN-WSX = Factory-Installed BI-Level Motion Sensor Installed with Back Box

ACCESSORIES:



WSX-RL-WH



WSX-RL-FR



WSX-RL-AB

FACTORY-INSTALLED OPTIONS:



OPT-PC-BUM



OPT-WSX-WG



OPT-EM-WSX



OPT-SEN-WSX

Back Box Dimensions: 7" x 1.6"

