WSX SERIES Outdoor Lighting

WSX-20-40W-MCTP-SCH

45" SUSPENDED CHAIN CANOPY CORD

Malti Color Temperature & Multi Power/Wattage (Selectable)




LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.



Customer Name:

Project Name:

Note:



5 1/8"(W) x 57"(H) x 10 1/4"(D)

Features

- Aluminum Housing and Steel Back Plate
- White Glass Lens

- 7-Year Warranty
- Multi CCT Power Switch is Inside Fixture

Technical Specifications

Electrical:

Voltage: 120-277V AC 60Hz
Wattage: 20W/30W/40W
Power Factor: >0.90
Efficacy: 100 LPW

Mechanical:

- Aluminum Housing and Steel Back Plate
- White Glass Lens
- 45" Suspended Chain/Cord & Canopy
- Operating Temperature: -4°F to 104°F
- Wet Location
- 7-Year Warranty
- IP42, Suitable for outdoor use

Lighting:

- Dimming: Dimming: (Dual Function) Triac Dimmable at 120V & 0-10V Dimming at 120-277V
- Total Lumens: 4000LM Max.
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 90° x 110°
 Rated life: 70,000 Hrs

Applications:

 LED Seaside Outdoor Wall Lantern with aluminum housing & powder-coated finish, acrylic diffuser. Ideal for general site lighting, residential buildings, doorway, pathway and parking areas.
















Photometrics: wsx-20-40w-mctp-sch





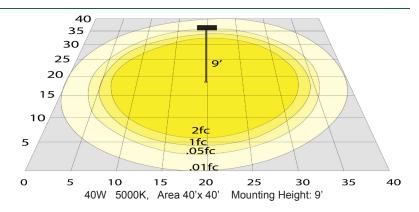

BUD Rating: B2-U1-G1

Other Views:







Lens View

Back View

Performance Table: wsx-20-40w-mctp-sch

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Ratin	LPW
WSX-20-40W-MCTP-SCH	20W 30W 40W	120-277V	2000LM 3000LM 4000LM	3000K 4000K 5000K	B2-U1-G1	100

Sample Ordering

Min. Watt Max. Watt Color Temp. Model Housing

WSX 20 40W MCTP SCH

Accessories:

Blank = No Option For Accessories

WSX-RL-WH = WSX Original White Lens Replacement (Default Lens)

WSX-RL-FR = WSX Optional Frosted Lens WSX-RL-AB = WSX Optional Alabaster Lens

Factory-Installed Options:

Blank = No Option For Accessories

OPT-WSX-WG = Factory-Installed Wire Guard

OPT-PC-BUM = Button Photocell

OPT-EM-WSX = Factory-Installed EM with Back Box

OPT-SEN-WSX = Factory-Installed Bi-Level Motion Sensor Installed with Back Box

ACCESSORIES:







WSX-RL-AB

FACTORY-INSTALLED OPTIONS:





OPT-PC-BUM





OPT-EM-WSX Back Box Dimensions: 7" x 1.6"

OPT-SEN-WSX





