

XIT SERIES Exit & Emergency Lighting


XIT-STRIP-2G-B
LED STRIP COMBINATION EXIT/EMERGENCY LIGHT, SINGLE OR DOUBLE FACE



Customer Name: _____

Project Name: _____

Note: _____ Type: _____

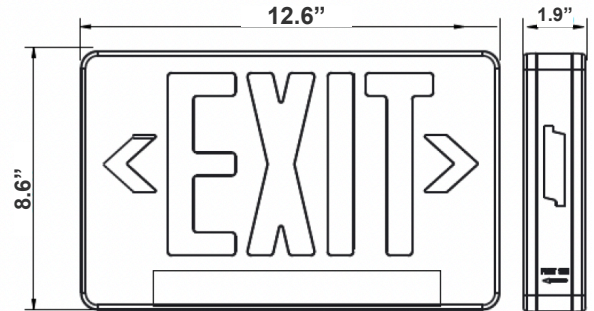

12.6" (W) x 8.6" (H) x 1.9" (D)

Exit signs shall be provided at every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations and intervals as are necessary to provide the occupants with knowledge of the various means of egress available

Features

- Universal Field-Selectable Single-/Double-Face
- 5-Year Warranty
- Maximum 24 hours for Full Recharge Time
- Built-in 1.2V 1000mAh Ni-MH Battery for Minimum 90 Minutes Emergency Operation
- Ultra bright GREEN LEDs

Technical Specifications

Electrical:

- Voltage: 120-277V / 60Hz
- Input Power: 3W, 50mA
- Efficacy: 33 LPW
- AC Charging Current: 20 mA
- Discharge Time: ≥ 90 mins
- Fully Automatic Solid-State, Two Rate Charger Initiates Battery Charging to Recharge a Discharged Battery in 24 hours
- Test Switch and Charge Indicator
- 1.2V long Life, Maintenance-Free, Rechargeable Ni-MH Battery

Mechanical:

- Black Finish
- Universal Single/Double Faceplate
- Letters 6 Height with 3/4 Stroke.(AVZ-CM15-R)
- Operating Temperature: 32°F to 104°F)
- Injection-Molded Thermoplastic ABS Housing,UL 924 and CEC Title 20 Compliant Flame Rating
- Innovative,Easy Installation in Minutes

Lighting:

- Ultra Bright GREEN LEDs
- Color Temperature: 5000K
- Total Lumen: 100LM
- Internal Solid-State Transfer Switch Automatically Connects the Internal Battery to LED Board for Minimum 90-minute Emergency Illumination
- 5-year Warranty

Applications:


- Ideal for every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations

Other Models:



- XIT-STRIP-2G-W



Photometrics: XIT-STRIP-2G-B



BUG Rating: B0-U1-G0

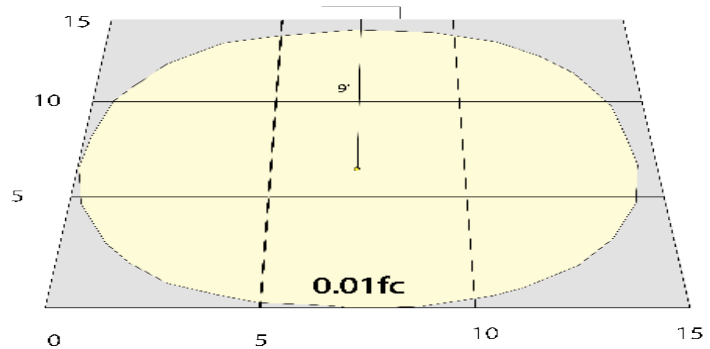

Area 15'x 15' Mounting Height: 9'

Other Views:



Side View



Front View



Back View

Performance Table: XIT-STRIP-2G-B

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
XIT-STRIP-2G-B	3W	120~277V	100LM	5000K	B0-U1-G0	33

Sample Ordering

Model	Style	Color	Finish
XIT	- STRIP	- 2G	- B

Other Models:



XIT-STRIP-2G-W

