
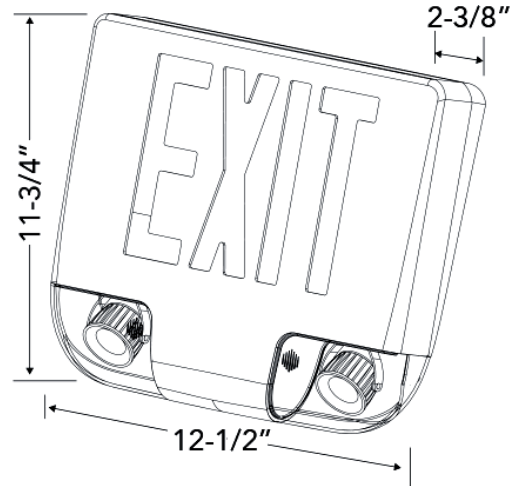


DIMENSIONS:

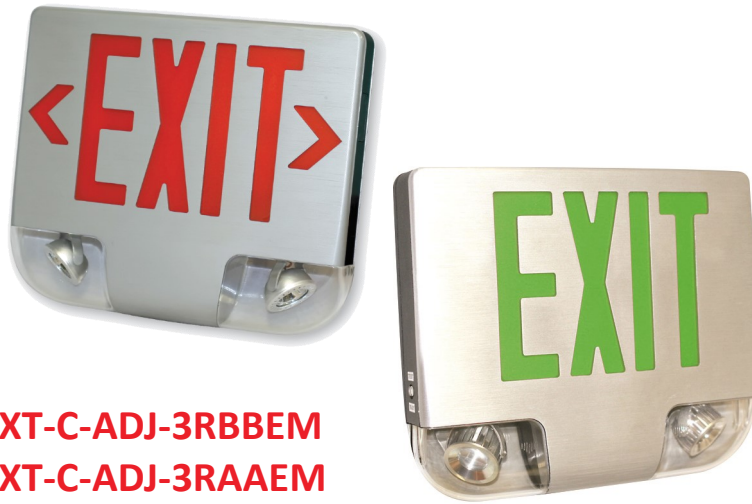

- XT-C-ADJ-3RBBEM**
- XT-C-ADJ-3RAAEM**
- XT-C-ADJ-3RWWEM**
- XT-C-ADJ-3GBBEM**
- XT-C-ADJ-3GAAEM**
- XT-C-ADJ-3GWWEM**

MODEL	VOLTAGE	NUMBER OF FACEPLATES	FACE-PLATE	BATTERY	LETTERS COLOR
XT-C-ADJ-3RBBEM	Dual 120-277V	Single/Double	Black	Ni-Cad	Red
XT-C-ADJ-3RAAEM	Dual 120-277V	Single/Double	Aluminum	Ni-Cad	Red
XT-C-ADJ-3RWWEM	Dual 120-277V	Single/Double	White	Ni-Cad	Red
XT-C-ADJ-3GBBEM	Dual 120-277V	Single/Double	Black	Ni-Cad	Green
XT-C-ADJ-3GAAEM	Dual 120-277V	Single/Double	Aluminum	Ni-Cad	Green
XT-C-ADJ-3GWWEM	Dual 120-277V	Single/Double	White	Ni-Cad	Green

COMBINATION LED EXIT SIGN & EMERGENCY

ELECTRICAL SPECIFICATIONS:

- Voltage: Dual 120-277V
- Wattage: 6W
- Lamp head wattage: 3W pre head

HOUSING SPECIFICATIONS:

- Universal canopy for side or top mounting on wall or ceiling
- Two fully adjustable LED heads
- Single or double faceplates
- Left and right arrow (Chevron)
- Low profile compact design,
- Mounting accessories included
- Suitable for damp location (32°F to 122°F)

CERTIFICATIONS: UL



TECHNICAL SPECIFICATIONS:

- Solid state electronics and charger board
- Push-to-test switch
- Specification grade exit with Premium high-output ultra bright LEDs
- 8.4V, Rechargeable Ni-Cad battery
- 90-minute EM-rated with push style test switch and red indicator light
- Optional Remote capacity available

WARRANTY: 3 years

- Meets UL924, NFPA life safety code, Local and State codes, NEC, OSHA

