

# XTU SERIES Exit & Emergency Lighting

XTU-RG-BK-2C-120V  
SUPER SLIM LED EXIT SIGN

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



SELECTION:




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

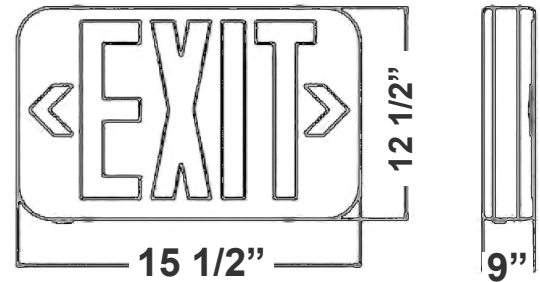

15 1/2" (W) x 12 1/2" (H) x 9" (D)

Exit signs shall be provided at every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations and intervals as are necessary to provide the occupants with knowledge of the various means of egress available

## Features

- 3-Year Warranty
- Maximum 24 Hours For Full Recharge Time
- Injection-Molded Thermoplastic ABS Housing And Polycarbonate Cover, UL 94V-0 Flame Rating

## Technical Specifications

### Electrical:

- 120V AC Dual Voltage Operation
- Sign Wattage: 1W
- Input Power: 2.90-3.79W
- AC Charging Current: 32mA
- Dual Circuit Operation (120V): Enables independent control of two circuits operating exclusively on 120V AC power, providing enhanced reliability and operational flexibility. Designed for applications requiring a primary and secondary power source or independent management of distinct lighting zones

### Mechanical:

- Injection-Molded Thermoplastic ABS Housing And Polycarbonate Cover, UL 94V-0 Flame Rating
- Red & Green Lenses Are Included. The Default Is Red
- To Change Color Of The Sign Change The Lens & Flip The Color Switch Inside
- Single Or Double Face (Universal)
- Letters 6" height with 3/4" stroke
- Operating Temperature: 68° F~104°F
- Universal J-box mounting Pattern
- Injection-Molded thermoplastic ABS Housing And Polycarbonate Cover, UL 94V-0 Flame Rating
- Innovative, Easy Installation in Minutes
- IP20, Indoor Use Only

### Lighting:

- Color Temperature: 1001K
- Total Lumens: 8 (AC)/ 272 (DC)
- Ultra Bright LEDs
- Internal Solid-State Transfer Switch Automatically Connects The Internal Battery to LED Board For Minimum 90-Minute Emergency Illumination
- Charge Rate/Power "ON" LED Indicator Light And Push-To-Test Switch For Mandated Code Compliance Testing

### Applications:

- Ideal for every exit door, at the intersection of corridors, at exit stairways or ramps and such other locations





Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com |




WG-11162022

**Photometrics:** XTU-RG-BK-2C-120V



BUG Rating: B0-U1-G0

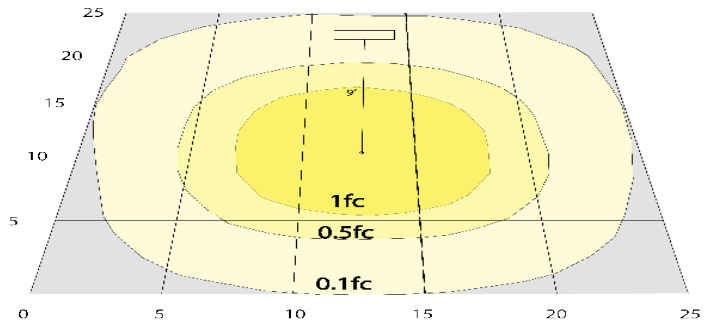

Area 25'x 25' Mounting Height: 9'


**Other Views:**



Side View



Front View



Back View



Side View



Front View



Back View

**Performance Table:** XTU-RG-BK-2C-120V

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
XTU-RG-BK-2C-120V	1W	120V	8 (AC) 272 (DC)	1001K	B0-U1-G0	2 (AC) 78(DC)

**Sample Ordering**

**Model Color Finish 2In1Color Voltage**

XTU - RG - BK - 2C - 120V

**Other Models:**



XTU-RG-EM

