




DIMENSIONS:

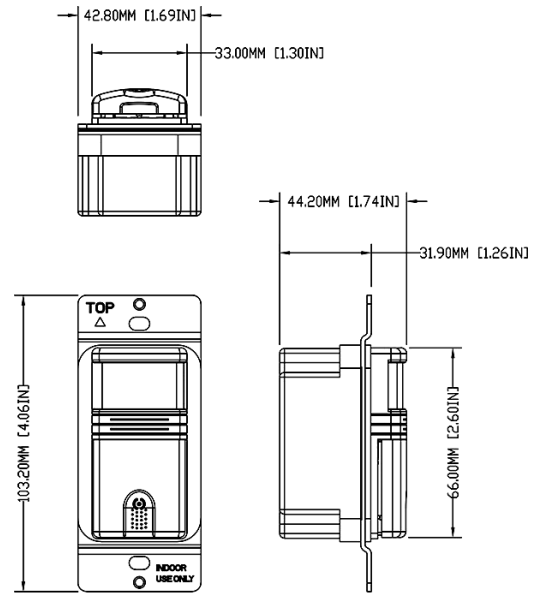

MODEL	MAX LOAD	VOLTAGE	DETECTION ANGEL
YM2108-T-W	0~600W/0~1000W	120/277VAC	180°

TECHNICAL SPECIFICATIONS:

- Detection Angle: 180°
- Automatic ON /OFF and Manual ON/ Automatic OFF operation
- Passive Infrared (PIR) Technology
- California Title 24 compliant
- 3-Way, Neutral required
- Green LED indicates motion was sensed
- Load requirements: 0-600W/0-1000W Incandescent, fluorescent, indicate LED lamp, compact fluorescent (CFL), magnetic low-voltage (MLV) and electronic low-voltage
- Operating Humidity: 95%RH, non condensing
- Adjustable time delay from 15secs~30mins
- Sensitivity adjustment.

YM2108-T-W

OCCUPANCY & VACANCY SNSORS

Ideal for offices, conference rooms, break rooms, storage areas, basements, restroom.

ELECTRICAL SPECIFICATIONS:

- Max Load: 0~600W(120V)/0~1000W(277V)
- Voltage: 120/277VAC, 60Hz
- Load Horsepower: 1/6HP

HOUSING SPECIFICATIONS:

- Fits in any standard wall-box
- Coverage area: 600 ft²
- Mounting: Wall Mount
- Operating temperature: 32°F ~ 131°F

CERTIFICATIONS:



YM2108-T-W

OCCUPANCY & VACANCY SNSORS

MODEL	MAX LOAD	VOLTAGE	DETECTION ANGEL
YM2108-T-W	0~600W/0~1000W	120/277VAC	180°

WIRING DIAGRAM:

