

# GPC SERIES Outdoor Lighting

GPC-60-100W-MCTP  
GARDEN POST COACH LIGHT

**WESTGATE**  
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

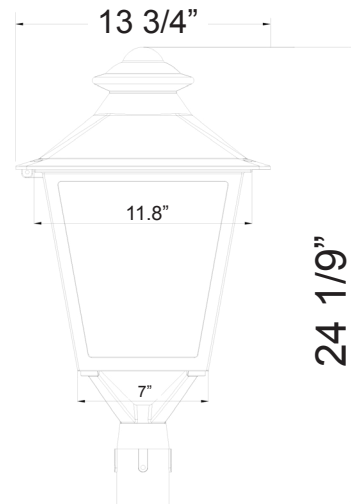

24 1/9"(H) x 13 3/4"(W)

Ideal for Residential Landscaping, Commercial Landscaping, Public Parks and Gardens, Pathway Lighting, Architectural Highlights, Hospitality and Outdoor Dining And Residential Communities.

## Features

- Housing: Aluminum
- Finish: Black powder coated
- 70,000 Hours Rated Life
- 7-Year Warranty
- Multi CCT: Selectable CCTs Switch Located Under the Top Hat
- Open Sides & Bottom

## Technical Specifications

### Electrical:

- Voltage: 120-277V AC/50~60 Hz
- Wattage: 60W/80W/100W Selectable
- Power factor: >0.9
- Efficacy: 90 LPW
- THD: ≤20%

### Mechanical:

- Die-cast Aluminum Housing with Powder Coat Finish
- Open Sides & Bottom
- Operating Temperature: -40°F to 104°F
- IP Rating: IP65
- Suitable for Wet Locations
- 7-Year Warranty

### Lighting:

- Dimmable: 0~10V Dimming
- Multi CCT: Selectable CCTs Switch Located Under the Top Hat
- Total Lumens: 5400LM/7200LM/9000LM
- Color Temperature: 3000K/4000K/5000K
- Color Rendering Index: ≥ 70
- 70,000 Hours Rated Life

### Applications:

- Ideal for Residential Landscaping, Commercial Landscaping, Public Parks and Gardens, Pathway Lighting, Architectural Highlights, Hospitality and Outdoor Dining And Residential Communities.






Phone: (877) 805-2252 | Fax: (877) 805-2252  
www.westgatemfg.com



WG-06232022

## Photometrics: GPC-60-100W-MCTP

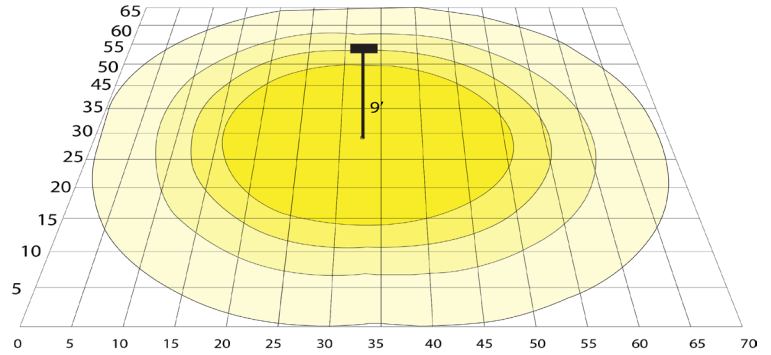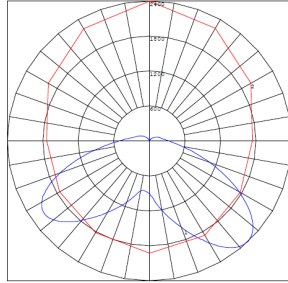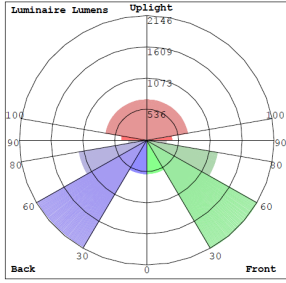

BUD Rating: B3-U4-G3

100W 5000K, Area 65'x 70' Mounting Height: 9'

## Other Views:



Lens View  
Power & CCT Switches



Bottom View  
Inside Diameter: 2-3/4"

## Performance Table: GPC-60-100W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
GPC-60-100W-MCTP	60W 80W 100W	120V	5400LM 7200LM 9000LM	3000K 4000K 5000K	B3-U4-G3	90

## Sample Ordering

Model Min. Watt Max. Watt Color Temp.

GPC - 60 - 100W - MCTP

## Factory Installed Option:

Blank = No Option For Accessories

OPT-GPC-GSF = FACTORY-INSTALLED GLASS LENSES ON ALL 4 SIDES OF THE FIXTURE, THE BOTTOM OF THE FIXTURE IS STILL OPEN

OPT-GPC-GBF = FACTORY-INSTALLED GLASS LENS ON THE FIXTURE'S BOTTOM

PT-GPC-PCLF = FACTORY-INSTALLED FROSTED POLYCARBONATE LENSES ON ALL 4 SIDES OF THE FIXTURE, AND BOTTOM OF THE FIXTURE

PT-GPC-PCLC = FACTORY-INSTALLED CLEAR POLYCARBONATE LENS ON THE

BOTTOM OF THE FIXTURE, AND BOTTOM OF THE FIXTURE

## FACTORY INSTALLED OPTION:



GPC-PCLF  
Shown with Frosted Lens




OPT-LF3-PCK  
Twist-Lock Photocell on Top



GPC-SH  
Shown with Shield



PML-BASE-BK  
DECORATIVE PIER MOUNT BASE FOR  
POST TOP LIGHTS -BLACK

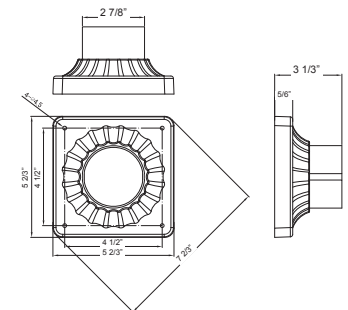

5 2/3"(H) X 5 2/3"(W) X 3 1/3"(D)

