

5. Display Cases – refrigerated

for serve-over



Euro-Counter 520/710 E BE SLIDE OUT 1000

Perfect presentation and easy operation



Also available in black on request.



Euro-Counter with merchandise drawers!

- Practical drawer with soft-close enables a quick and easy operation
- With SOFT-CLOSE for low-noise and safe closing of the lower drawer and the upper pull-outs
- Perfect presentation thanks to the transparent construction
- Gentle cooling prolongs the freshness of the goods
- DROP-IN – simple installation from above
- With WIHA CLOUD CONTROL: smart control and monitoring via the WIHA app

Easy to use!

With the pull-out drawers, the goods in the display case are easier to reach, which makes the operation much simpler. This way, a higher product pressure is possible – but all products are still easily accessible!

The lower merchandise drawer can be pulled out almost completely. The cream cakes placed in two rows can be removed easily from the first AND from the second row. Thus it is not necessary to push cakes away that are in the way. The upper glass pull-outs can be pulled out easily after opening the glazed flaps. The merchandise drawer and the glass pull-outs are equipped with the SOFT-CLOSE technology for low-noise and safe closing.

Option: Light colour adjustable, see page 138.

Base element UTB 51 optionally available, see table on page 406.




DROP-IN – simple installation from above.

All flaps are made entirely of glass.

This gives the operator a complete overview of the perfectly presented range of goods.

For optimal illumination, durable and energy-saving LED lighting fixtures (light colour: 4000 K) are mounted above each pull-out.

A high-quality technology with gentle circulating air cooling technology, insulating glazing on the customer side and the proven LONG-LIFE technology for the safe operation of the cooling unit guarantee long-term commercial use.

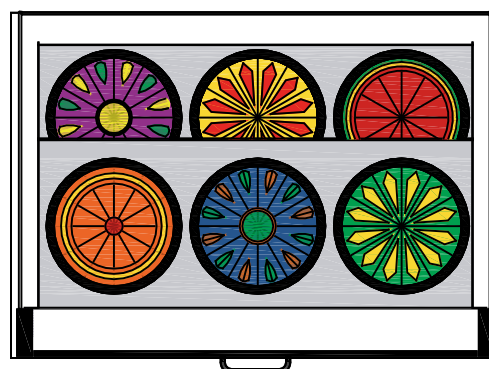

For cakes *:

2. Intermediate shelf: 3 cakes

1. Intermediate shelf: 3 cakes

lower display: 6 cakes

12 cakes

* ø Cake approx. 280 mm, ø Cake plate approx. 300 mm

The overall length of 1000 mm also enables optimal use for bakery and confectionery shops. 12 cream cakes or cakes can be presented on 1.28 m² display trays.

WIHA Euro-Counter SLIDE OUT 1000 Model	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Euro-Counter 520 E BE SLIDE OUT 1000	Art.-No. 6343	Art.-No. 6341	1122	605 W	230V/410W
Euro-Counter 710 E BE SLIDE OUT 1000	Art.-No. 6344	Art.-No. 6345	1122	605 W	230V/410W

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting
to the customer's drain
Protective machine cover type 605

Art.-No.
33196

3815
33194

Surcharge for WIHA CLOUD CONTROL

(not possible together with option "adjustable light colour")

Price label rail pull-out drawer 1000
Price label rail lower display area Euro-C 1000

Art.-No.
33577

6440
33494

Option: Light colour adjustable, see page 138.

Base element UTB 51 optionally available, see table on page 406.

Description

Refrigerated display case with circulating air and merchandise drawers on the operator side for cooling cakes, cream cakes and snacks. The customer side has an angular glass construction made of insulating glazing.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Humidity: approx. 70% to 85%.
Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
Located directly above the circulating air evaporator is a merchandise drawer and located above the drawer are one or two glass pull-outs, which can be pull-out after the flap on the customer side has been opened. The merchandise drawer and the glass pull-outs are fitted out with robust stainless steel roller drawers with overlength (load capacity 100 kg) and SOFT-CLOSE function. To clean the pan bottom, the upper pull-outs can be removed after the merchandise drawer has been pulled out. Then the circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs.

On the customer side and on the sides, the EURO-Counter SLIDE OUT 1000 is equipped with insulating glazing made of laminated safety glass. The front glass pane can be swung outwards for easy cleaning. The glass panes of the drawer and the pull-outs are made of safety glass.
For good illumination, a protected LED light (standard colour: white) is mounted above each merchandise shelf. The circumferential mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.





For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature sensor

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.
A condensate pan is available as accessory.

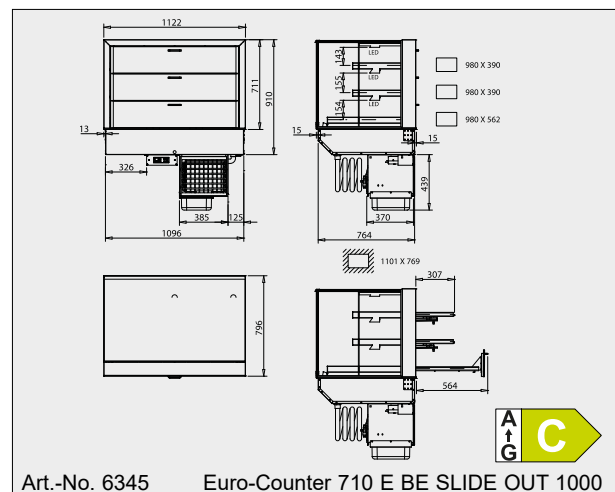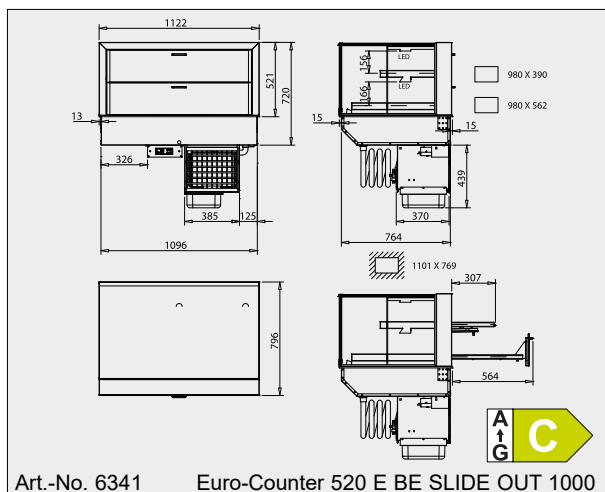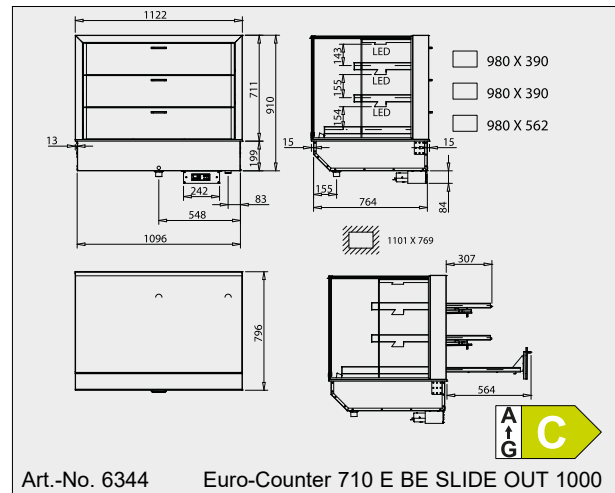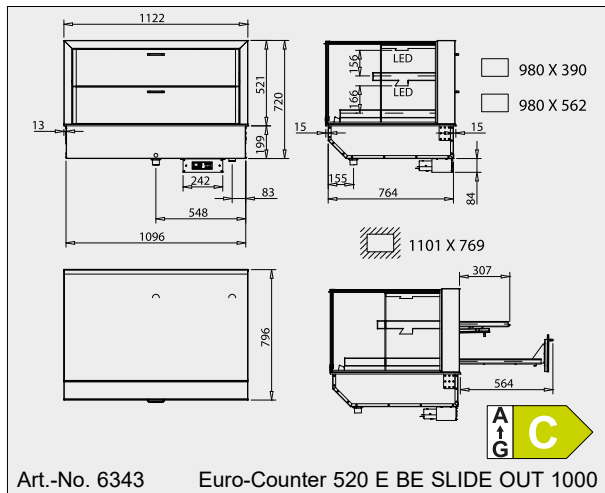

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".