

3. Air Chiller Units

angled installation (8°)



Bäcker-Snack® 8° BG IMPULSE

The black display (inclined) enables a perfect presentation



Preferred application:
Cream cakes, cakes, snacks with heights up to 8 cm max. Sandwiches on Snack Racks.

The patented FRESHNESS SYSTEM for keeping food fresh longer

- **BLACK-GLASS** – merchandise display is made of toughened glass with scratch-resistant, black shiny surface
- The air cooler can be easily folded down (**MOVE-DOWN-PLUS**), in case of R134a/R513A with additional gas pressure springs.
- Longer operating life of the cooling unit (**LONG-LIFE**)
- Hygienic base with round shaped corners (**ROUND-BOTTOM**)
- Easy cleaning of the air blow-off area (**EASY-CLEAN**)
- 4°C cooling technology
- 2 air speeds
- Liftable evaporator
- Service friendly (**MOVE-DOWN & MOVE-AWAY** technology)
- Comfortable digital temperature and defrost controller
- Separate mounting frame
- With **WIHA CLOUD CONTROL**: smart control and monitoring via the **WIHA app**

NEW! With **WIHA CLOUD CONTROL**, optionally available, more infos on page 432.



WIHA Bäcker-Snack 8° BG IMPULSE	For external cooling unit	With cooling unit and controller	Cooling power [-10°ET]	Connection cooling unit	
Model	Art.-No.	Art.-No.			
Bäcker-Snack 8° BG IMPULSE 600	25721	25727	370 W	230V/270W	■
Bäcker-Snack 8° BG IMPULSE 800	25722	25728	450 W	230V/350W	■ ■
Bäcker-Snack 8° BG IMPULSE 1200	25723	25729	605 W	230V/390W	■ ■ ■
Bäcker-Snack 8° BG IMPULSE 1600	25724	25730	825 W	230V/540W	■ ■ ■ ■
Bäcker-Snack 8° BG IMPULSE 2000 D (2 air coolers)	25726	25732 *	1060 W	230V/1025W	■ ■ ■ ■ ■

Delivery includes mounting frame. The refrigeration units for external cooling units include an expansion valve for R134a/R513A and built-in temperature sensors.

The patented WIHA FRESHNESS SYSTEM, WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.

* Without base element, the cooling unit is connected via refrigerant couplings.

Base element UTB 51 optionally available, see table on page 406.

Special Accessories

	Art.-No.
Condensate pan mounted under the colling unit	33196
Drain fitting 1 1/4" for connecting to the customer's drain	3815
TMP 620 controller for external cooling unit	12201
TMP 630-CLOUD controller with 2 freely usable outputs, for external cooling unit	33572
TMP 630 in place of TMP 620 with 2 freely usable outputs	12210
TMP 630-CLOUD controller instead of TMP 620 with 2 freely usable outputs	33568
Detachable control panel (SPLIT-CONTROL)	12219
extra charge for device with cooling unit in the base housing	
Protective machine cover type 370-825	33194
Air cooler for operation with refrigerant CO ₂	10197
(price per air cooler, see page 404)	

Patented **WIHA FRESHNESS SYSTEM** see page 33.

Description

Chiller unit with circulating air for cooling cakes, tarts and snacks with a merchandise height of up to 6 cm (lower position).

The effective merchandise display made of black toughened glass can be adjusted horizontally or for impulse sales at an angle (**MOVE-UP FUNCTION**).

To operate it, the customer should provide a glass top that should only be open on the air blow-off side.

Temperature:









Lower position: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Upper position: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Commercial product for the installation in stationary food and service counter.

Design

For design details of this model see Bäcker-Snack 8° IMPULSE (page 89), but with black toughened glass with scratch-resistant, black shiny surface.

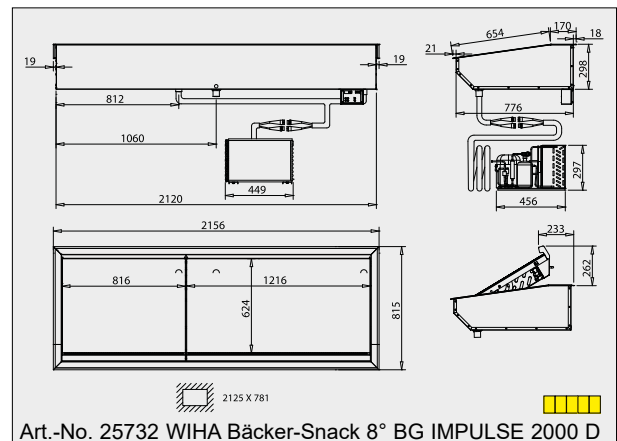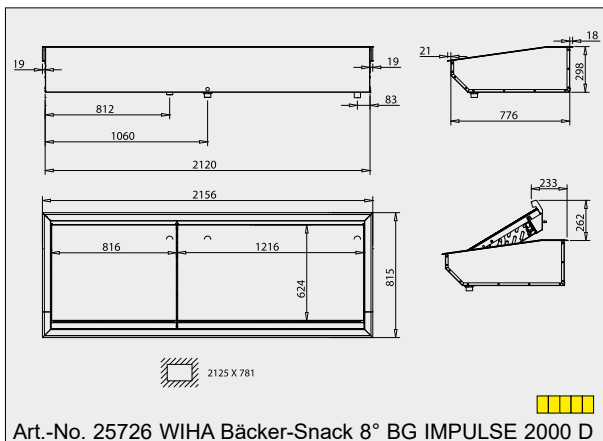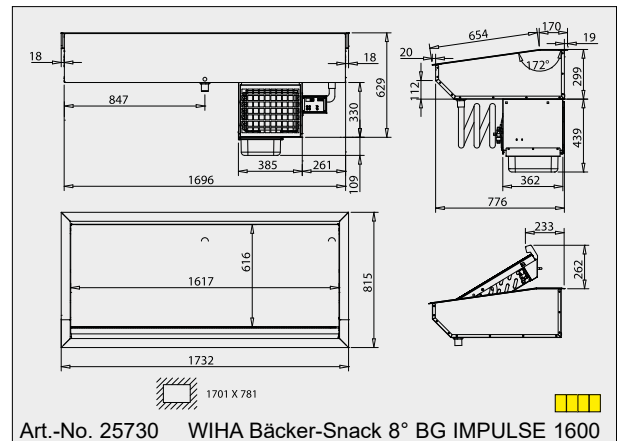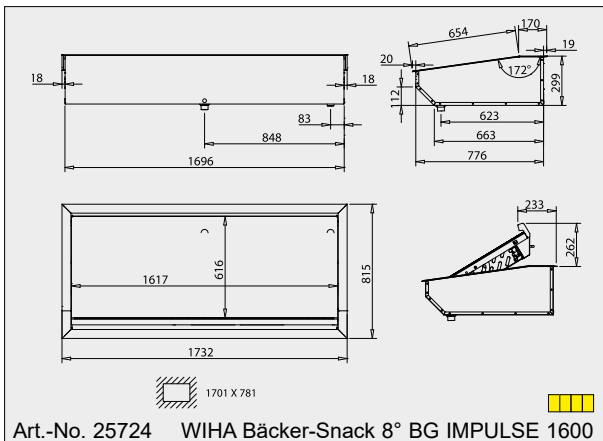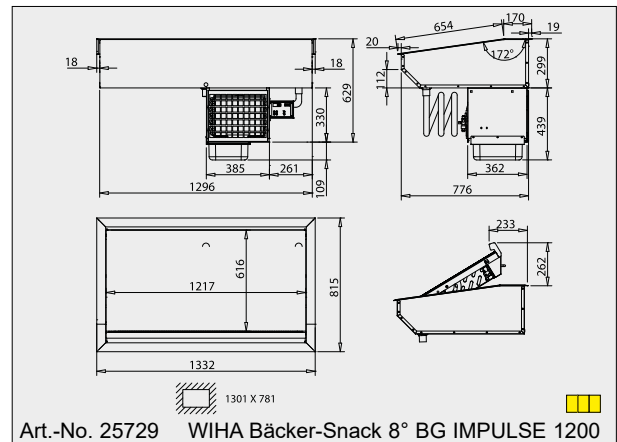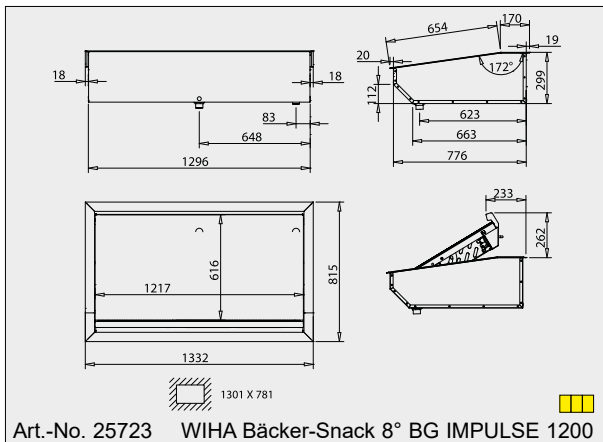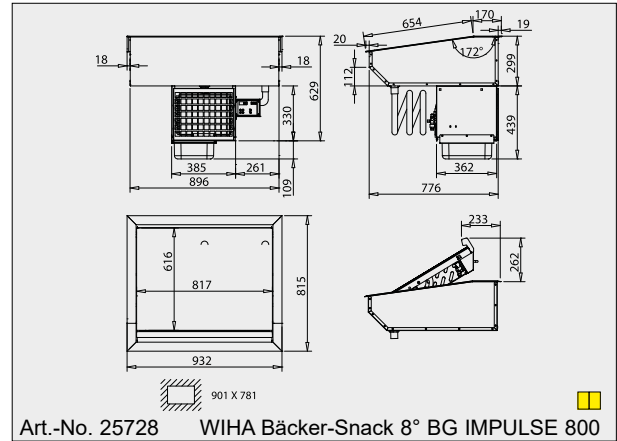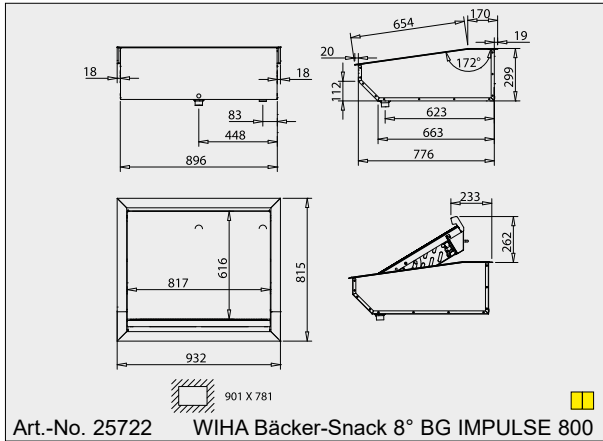

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".