


Snack-Counter ECO BE-VT

Energy-saving refrigerated display case with deep cooling pan, insulating glazing on all sides and LED lighting

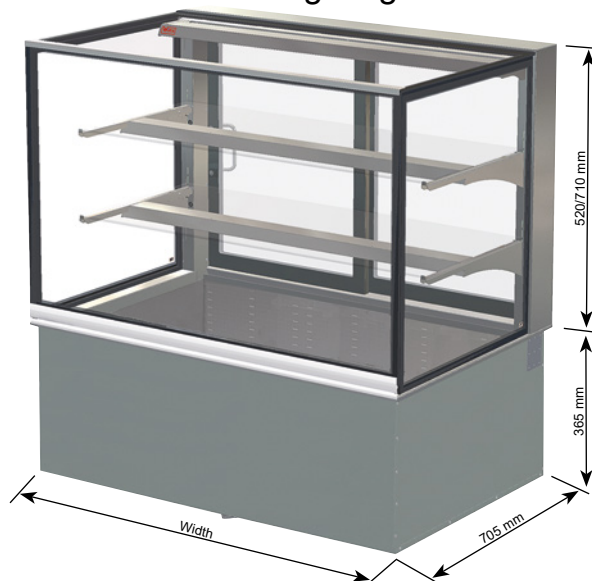

NEW!
With WIHA CLOUD CONTROL,
optionally available, more infos
on page 432.

Option: EASY-OPEN,
see page 138.

Option: Light colour adjustable,
see page 138.

Suitable price label rails,
see page 136.

Base element UTB 51 optionally
available, see table on page 406.

5
Serve-Over
Display Cases

Snack-Counter ECO 520 E BE-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	angular	angular			
Serve-over version Height glass top 520 mm					
Snack-Counter ECO 520 E BE-VT - DT 1.5	11694	11695	587	370 W	230V/325W
Snack-Counter ECO 520 E BE-VT - 2 *	13201	13211	750	370 W	230V/325W
Snack-Counter ECO 520 E BE-VT - DT 2	13202	13212	750	370 W	230V/325W
Snack-Counter ECO 520 E BE-VT - 3	13203	13213	1075	370 W	230V/340W
Snack-Counter ECO 520 E BE-VT - 4	13204	13214	1400	450 W	230V/345W
Snack-Counter ECO 520 E BE-VT - 5	13205	13215	1725	605 W	230V/425W

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO 710 E BE-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	angular	angular			
Serve-over version Height glass top 710 mm					
Snack-Counter ECO 710 E BE-VT - DT 1.5	11696	11697	587	370 W	230V/330W
Snack-Counter ECO 710 E BE-VT - 2 *	13221	13231	750	370 W	230V/330W
Snack-Counter ECO 710 E BE-VT - DT 2	13222	13232	750	370 W	230V/330W
Snack-Counter ECO 710 E BE-VT - 3	13223	13233	1075	450 W	230V/340W
Snack-Counter ECO 710 E BE-VT - 4	13224	13234	1400	605 W	230V/420W
Snack-Counter ECO 710 E BE-VT - 5	13225	13235	1725	825 W	230V/580W

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO

- Energy-saving
- All external glass panes made of insulating glass
- Low-maintenance LED lighting
- No condensation on the front glass panel ⁽¹⁾
- Front glass pane, side glass panes and upper glass pane made of double toughened safety glass (ESG)
- Longer operating life of the cooling unit (LONG-LIFE)
- Energy-saving EC fan motors (low voltage)
- Temperature: < 5 °C at an ambient temperature of 25 °C
- Lifiable evaporator for easy cleaning
- Coated lamellar evaporator
- Patented MOVE-DOWN and MOVE-AWAY TECHNOLOGY for easy cleaning

⁽¹⁾ At setpoint 6 °C/AT 25 °C/RH: 70 %.

Special Accessories

Condensate pan mounted under the cooling unit	Art.-No. 33266
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Protective machine cover type 370-605	8179
Protective machine cover type 825	8181
Air cooler for operation with refrigerant CO ₂ (see page 404)	10197
Surcharge for WIHA CLOUD CONTROL (not possible together with option "adjustable light colour")	33577
Sliding door lockable	10147
Wing door DT lockable	30005
Option soft-close (soft-closing sliding doors)	4711
Suction cup with handle (for easy opening of the front pane)	6244
Bearing rails for GN containers and shelves (Snack-Counter size per GN 1 (1 pair))	9880
Note: GN 1/1- and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 136.	
Display shelf, unperforated; W=325 mm, GN 1 (Bearing rails must be ordered separately.)	6413

5. Display Cases – refrigerated

for serve-over



Description

Energy-saving refrigerated display case with circulating air, recessed cooling pan and insulating glazing on all sides for cooling cakes, cream cakes and snacks. ECO-PLUS version with reduced energy consumption.

On the customer side, lateral and on top with insulating glazing made of double safety glass. Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The vertical walls above the evaporator are provided with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–150 mm deep) can be mounted or display shelves (available as accessories) can be inserted.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

On the customer side, on the sides and on top with insulating glazing **made of double safety glass**. The front glass pane can be swung outwards for easy cleaning. The height adjustable shelves

are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit

Delivery includes:







- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

5
Serve-Over
Display Cases

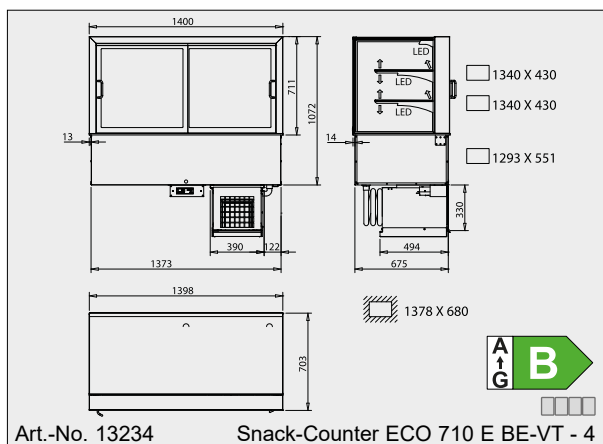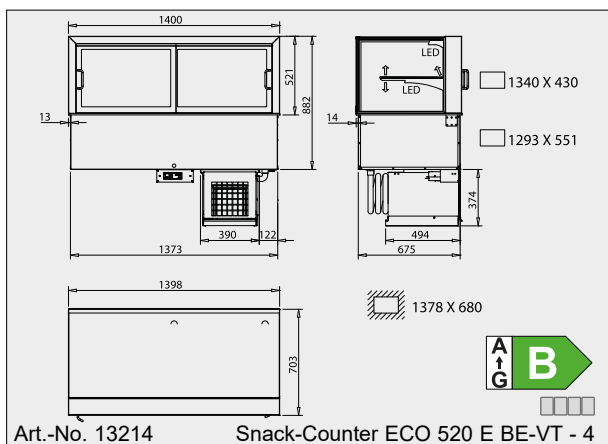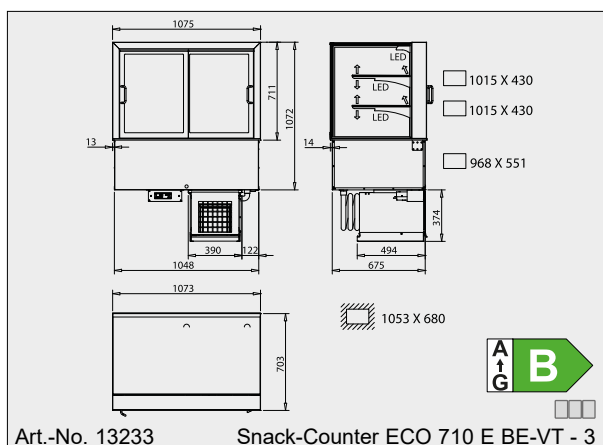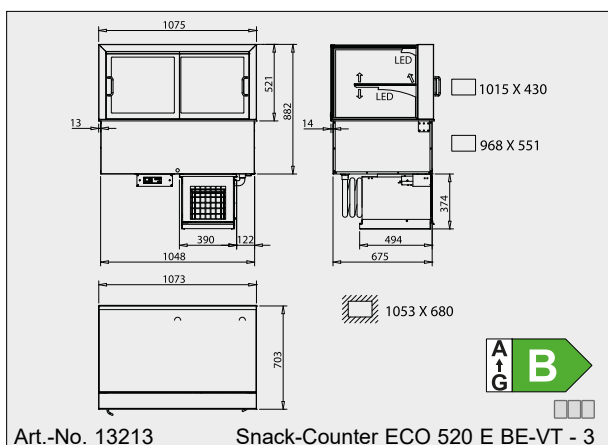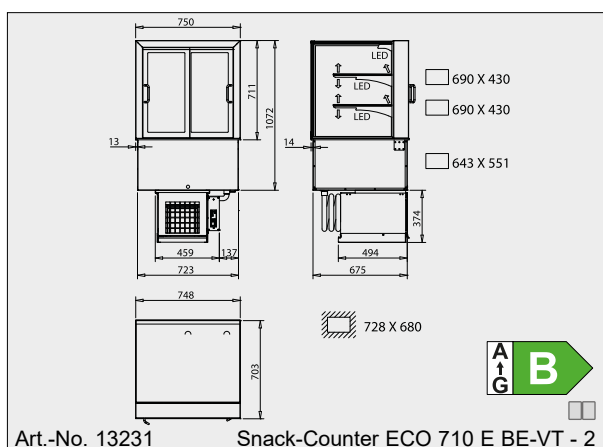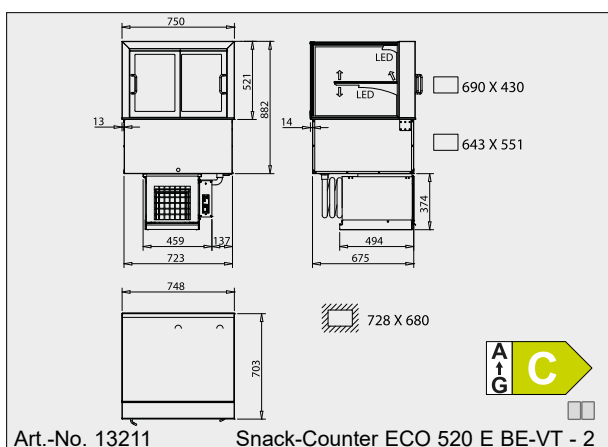

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".