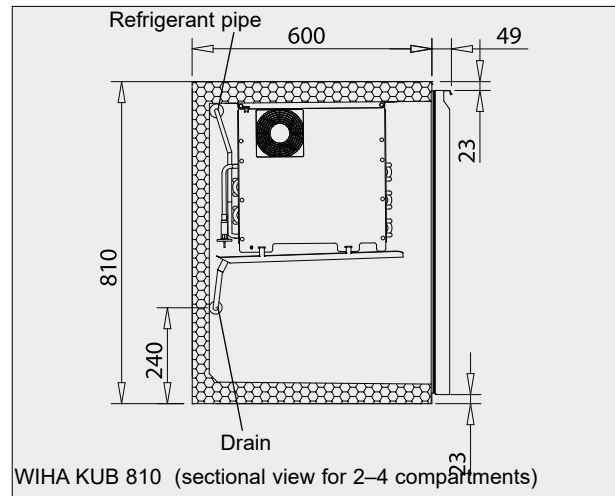
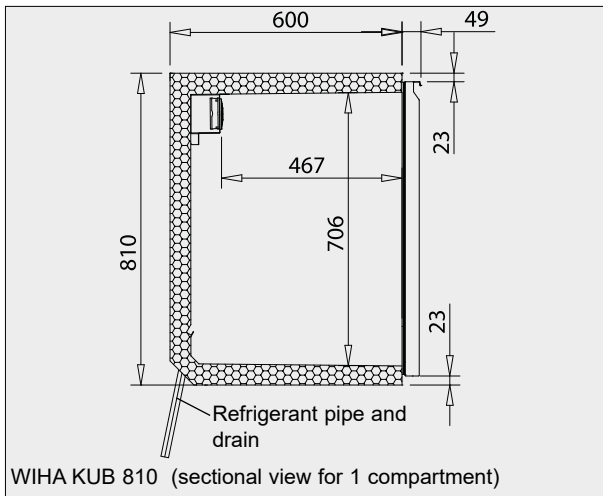


KUB 810 – for Beverages, 810 mm High





Design see page 299.

Also available with black front.



NEW! With **WIHA CLOUD CONTROL**, optionally available, more infos on page 432.

For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 10521 (*)		Art.-No. 20940 (*)		Art.-No. 10571 (*)	
Art.-No. 10531 (*)		Art.-No. 20941 (*)		Art.-No. 10581 (*)	

(*) The pullout 10194 cannot be inserted in this model.







Height: 810 mm, depth: 600 mm + 49 mm

11
Under Counter
Refrigerators







11. Under Counter Refrigerators

KUB 810



For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 290W/-10°ET	Recommended cooling power: 290W/-10°ET	Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W
 1100 mm Art.-No. 10522	 1250 mm Art.-No. 20942	 1450 mm Art.-No. 10572
 1100 mm Art.-No. 10532	 1250 mm Art.-No. 20943	 1450 mm Art.-No. 10582







Height: 810 mm, depth: 600 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
 1650 mm Art.-No. 10523	 1800 mm Art.-No. 20944	 2000 mm Art.-No. 10573
 1650 mm Art.-No. 10533	 1800 mm Art.-No. 20945	 2000 mm Art.-No. 10583

Height: 810 mm, depth: 600 mm + 49 mm

11

Under Counter Refrigerators

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec connection: 230V/50Hz/380W
 2200 mm Art.-No. 10524	 2350 mm Art.-No. 20946	 2550 mm Art.-No. 10574
 2200 mm Art.-No. 10534	 2350 mm Art.-No. 20947	 2550 mm Art.-No. 10584

Height: 810 mm, depth: 600 mm + 49 mm

Inserts KUB 810

Wing Door DIN Left with 1 supporting grid usable height 700 mm Art.-No. 10182	
Wing Door DIN Right with 1 supporting grid usable height 700 mm Art.-No. 10183	
Wing Door DIN Left with barrel rail for 30 l barrel usable height 695 mm Art.-No. 10184	
Wing Door DIN Right with barrel rail for 30 l barrel usable height 695 mm Art.-No. 10185	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 312 mm top, 305 mm bottom Art.-No. 10198	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 270 mm top, 350 mm bottom Art.-No. 10188	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 350 mm top, 260 mm bottom Art.-No. 10189	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) effe. height 180 mm / 195 mm / 175 mm Art.-No. 10194 (*)	

(*) The stainless steel roller drawer no. 10194 cannot be inserted in a body with only one compartment!

Wing Door DIN Left, Glass with grid usable height 700 mm Art.-No. 9436	
Wing Door DIN Right, Glass with grid usable height 700 mm Art.-No. 9437	

Usable dimensions of the drawers for KUB 810

Usable height [mm]	Usable area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
350	W 376 mm D 510 mm	PET 1,5 l PET 1,0 l Glass 0,75 l Glass 0,33 l	94 x 337 81 x 303 80 x 321 61 x 234	20 30 30 42	3x GN 1/3-150 6x GN 1/6-150
315	W 376 mm D 510 mm	PET 1,0 l Glass 0,33 l Glass 0,25 l	81 x 303 61 x 234 58 x 216	30 42 56	3x GN 1/3-100 6x GN 1/6-100
270	W 376 mm D 510 mm	Glass 0,33 l Glass 0,25 l	61 x 234 58 x 216	42 56	3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling beverage bottles and beer barrels with a height of 695 mm.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Note:

A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.

The price of the second evaporator is not included in the price and must be added.

Special Accessories

Surcharge expansion valve for R452A instead R134a/R513A	Art.-No. 9117
Divider bar for pullout partitioning to accommodate bottles, lockable plastic model	8882
Divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	8883
GN bearing rail	8886
Extra grid with 2 bottom beams	8885
GN intermediate section behind central bar (small grid for the space between 2 compartments)	9191
GN grid, side limit left	6620
GN grid, side limit right	6621
Base rail, 40 mm high, per r.m. body length	9133
Solenoid valve mounted behind the panel	9122
Drill hole 35 mm in body panel	21140
Drill hole 46 mm in body panel	21141
Drill hole 65 mm in body panel	21142
Drill hole 76 mm in body panel	21144
Drill hole 86 mm in body panel	21145
Refrigerant pipes on the rear, centred out of the body	9139
Lock for door or drawer	9157

TMP 610 controller for standard cooling	Art.-No. 12205
TMP 610-CLOUD controller for ext. cooling unit	33575
TMP 610-CLOUD controller instead of TMP 610	33571

Second evaporator for external cooling systems	8099
Second evaporator for ready-to-use refrigerators	8095
LED lighting 12V/8W (height of compartment 810) (incl. transformer 230V/12V)	9444

Mounting Covers

Width 150 mm, height 810 mm	Art.-No.
Cover with cut-out for 1 x controller TMP 6xx, mounted on the left	21120
Cover with cut-out for 1 x controller TMP 6xx, mounted on the right	21121
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the left	21122
Cover with cut-outs for 2 x controller TMP 6xx, mounted on the right	21123