

15. Stainless Steel Glass Supports

with round tube



System TOP 3535 S

For straight counter tops with lighting



Tip:
Suitable lighting covers are
on page 402.



The front panel can be rotated
for easy cleaning!

- Easy cleaning of the front panel
- Patented safety function
- Simple cable inlet/guiding
- Made of high-quality stainless steel


WIHA TOP 3535 S

Name of the item	Art.-No.	Glass shelf		Front panel	
		Glass length	Angle	Glass length	Angle
Support left	4005	+17 mm	90°	-20,5 mm	90°
Support right	4006	+17 mm	90°	-20,5 mm	90°
Central support - 180°	4007	-1 mm	90°	-20,5 mm	90°
Retainer set, front panel	2419				
Retainer set, side panel	2407				

The glass length is based on the centre distance (drilling distance) of the supports. Changing the glass length should be considered for each support on a case-by-case basis.
Note: Drill diameter for mounting screw = 10 mm, the mounting hole is to be moved 4 mm forward compared to the centre of the support.

System TOP 3535 SW

For straight and angled counter tops without lighting

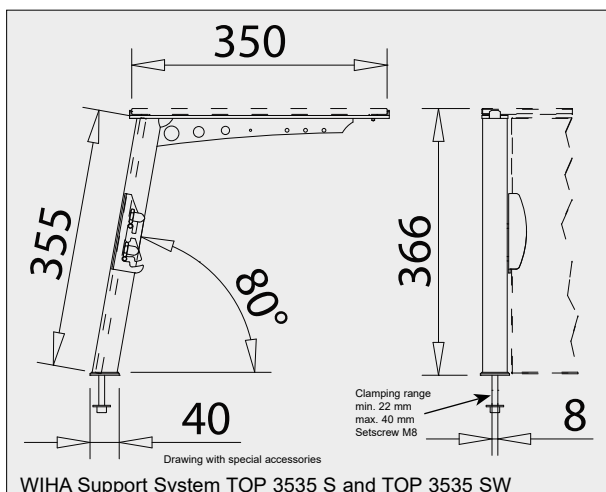

WIHA TOP 3535 SW

Name of the item	Art.-No.	Glass shelf		Front panel	
		Glass length	Angle	Glass length	Angle
Support left	4005	+17 mm	90°	-20,5 mm	90°
Support right	4006	+17 mm	90°	-20,5 mm	90°
Central support - 180°	4007	-1 mm	90°	-20,5 mm	90°
Central support - 165° ⁽¹⁾	4009	-1 mm	82,5°	-20,5 mm	88,5°
Central support - 150° ⁽¹⁾	4010	-1 mm	75°	-20,5 mm	87° ⁽¹⁾
Central support - 135° ⁽¹⁾	4011	-1 mm	67,5°	-20,5 mm	85,5° ⁽²⁾
Central support - 120° ⁽¹⁾	4018	-1 mm	60°	-20,5 mm	84° ⁽³⁾
Retainer set, front panel	2419				
Retainer set, side panel	2407				

The glass length is based on the centre distance (drilling distance) of the supports. Changing the glass length should be considered for each support on a case-by-case basis.
(1) For this support, the top corner of the front panel must be bevelled about 20/20 mm.
(2) For this support, the top corner of the front panel must be bevelled about 30/30 mm.
(3) For this support, the top corner of the front panel must be bevelled about 40/40 mm.
Note: Drill diameter for mounting screw = 10 mm, the mounting hole is to be moved 4 mm forward compared to the centre of the support.

⁽¹⁾ Angle: View from the operator side.

15
Stainless Steel
Glass Supports