


Snack-Counter 870 E SB-VT

Serve-over version with 3 intermediate shelves and recessed cooling pan in GN size

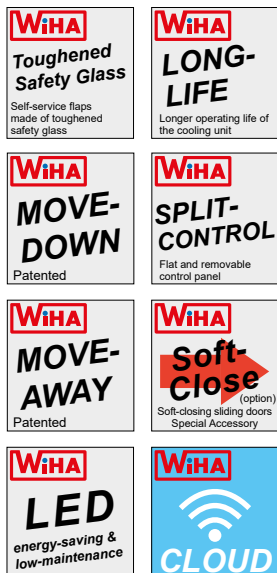

NEW! With WiHA CLOUD CONTROL, optionally available, more infos on page 432.

Base element UTB 51 optionally available, see table on page 406.

Option: Light colour adjustable, see page 138.



6
Self-Service
Display Cases

Snack-Counter 870 E SB-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	angular	angular			
Self-service version Height glass top 870 mm					
Snack-Counter 870 E SB-VT - 2 *	11500	11504	750	605 W	230V/350W
Snack-Counter 870 E SB-VT - DT 2	11524	11525	750	605 W	230V/350W
Snack-Counter 870 E SB-VT - 3	11501	11505	1075	605 W	230V/380W
Snack-Counter 870 E SB-VT - 4	11502	11506	1400	825 W	230V/540W
Snack-Counter 870 E SB-VT - 5	11503	11507	1725	1060 W	230V/715W

WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Special Accessories

Condensate pan mounted under the cooling unit **33196**

Drain fitting 1 1/4" for connecting to the customer's drain **3815**

Protective machine cover type 605

Protective machine cover type 825/1060

Surcharge for WiHA CLOUD CONTROL

(not possible together with option "adjustable light colour")

Bearing rails for GN containers and shelves (1 pair) **9880**

Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 202.

Bearing rails for GN containers and shelves (1 pair) **9982**

For Snack-Counter size GN 4: 3 x 9880 und 1 x 9982, for Snack-Counter size GN 5: 4 x 9880 und 1 x 9982

Display shelf, unperforated; width=325 mm

(Bearing rails no. 9880 must be ordered separately.)

Option soft-close (soft-closing sliding doors)

Art.-No.

33194

33195

33577

6413

4711

Suitable price label rails, see page 202.

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages, salads, delicacies, cream cakes, cakes and snacks. The customer side has an angular glass construction made of safety glass. Self-service version with self-service flaps made of safety glass on the customer side. The glass shelves can be set at an angle, which means better presentation. Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs.

6. Display Cases – refrigerated for self-service



For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

On the customer with angular glass construction and self-service flaps made of safety glass. The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version SB:

The customer side has self-service flaps made of safety glass.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side with sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit

Delivery includes:







- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

6 Self-Service Display Cases

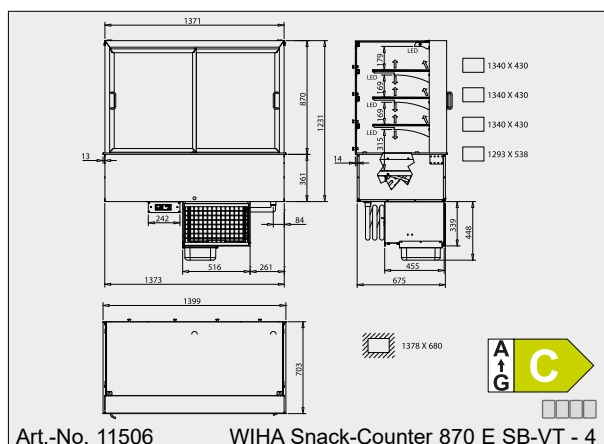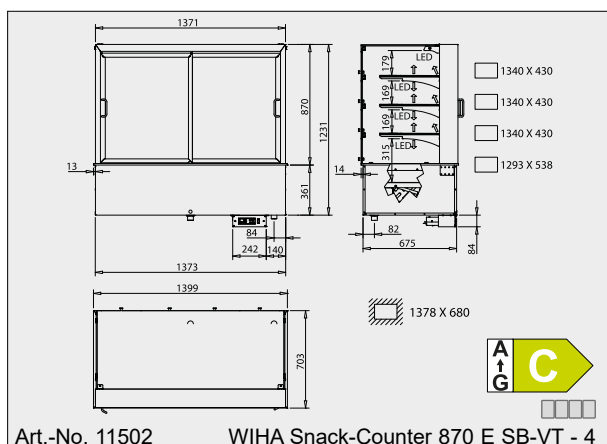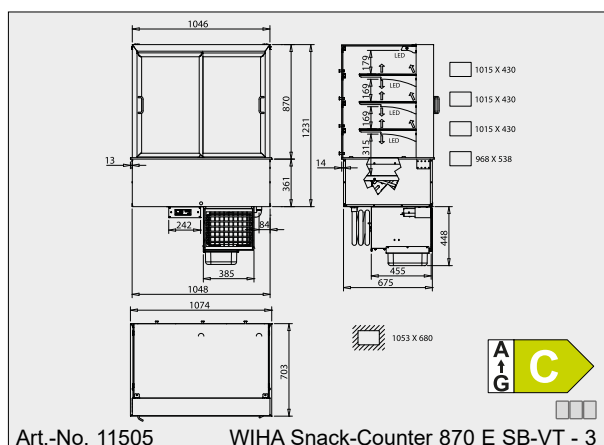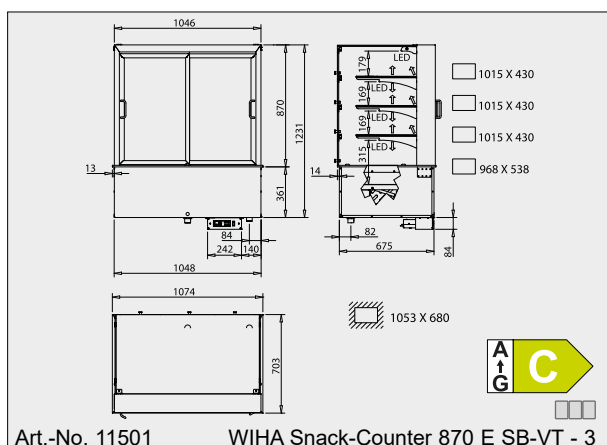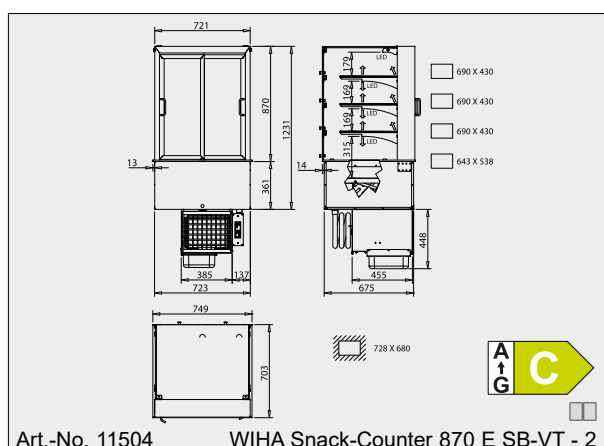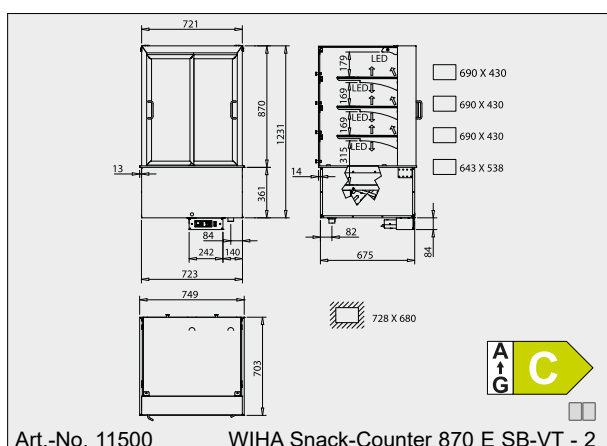

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".