
6. Display Cases – refrigerated

for self-service



Self-service version, open on customer side with recessed cooling pan, air curtain,

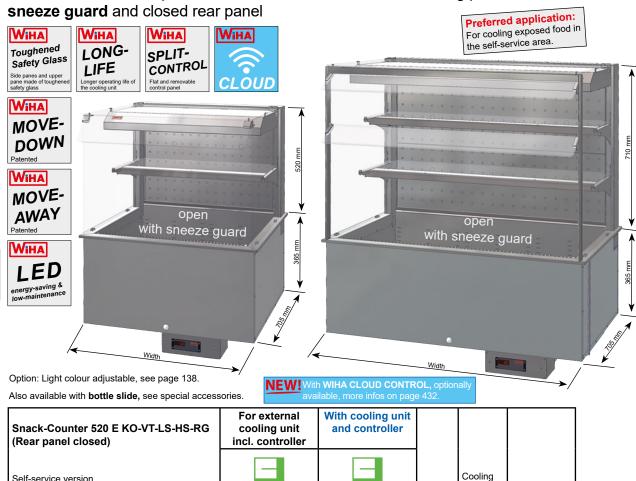

The refrigerated display cases for external cooling units include an expansion valve for R452A and a temperature controller. WIHA CLOUD CONTROL and condens are available as accessories.

angular

23791

23792

Snack-Counter 710 E KO-VT-LS-HS-RG (Rear panel closed)	For external cooling unit incl. controller	With cooling unit and controller			
Self-service version Height glass top 710 mm	angular	angular	Width [mm]	Cooling power [-10°ET]	Connection
Snack-Counter 710 E KO-VT-LS-HS-RG - 2	23595	23597	750	950 W	230V/950W
Snack-Counter 710 E KO-VT-LS-HS-RG - 3	23596	23598	1075	1200 W	230V/1235W

The refrigerated display cases for external cooling units include an expansion valve for R452A and a temperature controller. WIHA CLOUD CONTROL and condensate pan/drain trap are

26457

Special Accessories Condensate pan, loose	<u>ArtNo.</u> 3819
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Bearing rails for GN containers, shelves and bottle slide: Snack-Counter size per GN 1 (1 pair)	9880
Display shelf, unperforated; W=325 mm, GN 1 (Bearing rails must be ordered separately.)	6413
Bottle slide Snack-Counter GN 2 incl. 10 divider bars	26467
Bottle slide Snack-Counter GN 3 incl. 15 divider bars	26468
The bottle slide ensures the replacement of sold bottles a	nd the customers view

(not possible together with option "adjustable light colour")

Surcharge for WIHA CLOUD CONTROL

Width

[mm]

750

1075

angular

23794

23795

power

890 W

950 W

[-10°ET]

Connection

230V/940W

230V/960W

33577

Night Cover	angular		
Night Cover SC - KO 2	10495		
Night Cover SC - KO 3	10496		

Blind with housing for night cover

Night cover for mounting on the top of the glass construction. The blind can be pulled down on the customer side. The display case is equipped with holders at the bottom to fix the blind in the closed position.

If the night cover is delivered without a display case, the lower locking mechanism for the blind must be attached to the customer's display case frame in accordance with the installation instructions

on a full assortment up to the last bottle

Divider bars for bottle slide 520, single

Suitable price label rails, see page 202.

Height glass top 520 mm

Snack-Counter 520 E KO-VT-LS-HS-RG - 2

Snack-Counter 520 E KO-VT-LS-HS-RG - 3



6. Display Cases - refrigerated

for self-service

690 X 280 (250)

643 X 538

Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages and

reinigerated uspiral case with circulating an and recessed cooling pair or cooling beverages and unpackaged food.

Open on the customer side and with front air curtain, sneeze guard and angular glass construction made of safety glass. The rear panel is closed.

The glass shelves are height adjustable and can be set at an angle, which means better

presentation.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Commercial product for the installation in stationary food and service counter


Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 11/4* flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-horm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

721 690 X 330 (300) 643 X 538 · 675 36 749 Snack-Counter 520 E KO-VT-LS-HS-RG - 2



Self-service version that is open on the customer side, recessed cooling pan, front air curtain and sneeze guard. The rear panel is closed.

The side glass panes, the upper glass pane and the height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour; white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation

A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m). paner (instandant) deput, approx. 20 init, 1 init approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.


For external cooling unit Delivery includes:

- Expansion valve for R452A; other refrigerants available on request
- Digital defrost and temperature controller


Cooling Unit Model


The cooling unit is fully pre-assembled and is connected to the cooling pan with refrigerant couplings.

Please note: The counter design should include a well-ventilated base unit beneath refrigerated display case!









More drawings are available on www.wiha-web.com under "Info Centre / Customer Area".

