

Combi-Line GN STEAM 520/710 BE

Heated display case with circulating air heating and STEAM technology

- WiHA**
Toughened Safety Glass
Front pane, side panes, upper pane made of toughened safety glass
- WiHA**
Soft Close
(option)
Soft-closing sliding doors
Special Accessory
- WiHA**
LED
energy-saving & low-maintenance
- WiHA**
SPLIT-CONTROL
Flat and removable control panel
- WiHA**
CLOUD



NEW!
With WIHA CLOUD CONTROL, more infos on page 432.

- Easy to combine
- Very transparent design – unobstructed view of the goods
- High-quality lighting emphasises the product freshness
- Height-adjustable and inclinable glass shelves
- Adjustable humidity (6 steps) for optimal product quality
- Fully automatic steam generator with tank/pump system for automatic water filling
- Powerful circulating air heater for even temperature distribution
- No or very slight fogging of the glass panes even at higher humidity
- For the version with tank/pump system:
No water connection or drain required
- Temperature can be adjusted digitally up to approx. 75°C
- DROP-IN – easy installation from above
- With WIHA CLOUD CONTROL: smart control and monitoring via WIHA App

10
Combi-Line
Display Cases

Combi Line GN STEAM 520 E BE	Tank/Pump System 1 intermediate level	Fixed Water Connection 1 intermediate level	Width [mm]	Connection
Serve-over version Height glass top 520 mm	angular	angular		
Combi-Line GN STEAM 520 E BE - DT 1.5	33420	33421	588	230V/2.9kW
Combi-Line GN STEAM 520 E BE - 2 *	33422	33423	750	230V/2.9kW
Combi-Line GN STEAM 520 E BE - DT 2	33424	33425	750	230V/2.9kW
Combi-Line GN STEAM 520 E BE - 3	33426	33427	1075	230V/2.9kW

The version "DT" has wing doors on the operator side instead of sliding doors (model DT 1.5: 1 hinged door; door hinge on the left as standard, can be changed).
* The maximum opening width is approx. 300 mm due to the sliding door.

Combi Line GN STEAM 710 E BE	Tank/Pump System 2 intermediate levels	Fixed Water Connection 2 intermediate levels	Width [mm]	Connection
Serve-over version Height glass top 710 mm	angular	angular		
Combi-Line GN STEAM 710 E BE - DT 1.5	33428	33429	588	230V/2.9kW
Combi-Line GN STEAM 710 E BE - 2 *	33430	33431	750	230V/2.9kW
Combi-Line GN STEAM 710 E BE - DT 2	33432	33433	750	230V/2.9kW
Combi-Line GN STEAM 710 E BE - 3	33434	33435	1075	230V/3.0kW

The version "DT" has wing doors on the operator side instead of sliding doors (model DT 1.5: 1 hinged door; door hinge on the left as standard, can be changed).
* The maximum opening width is approx. 300 mm due to the sliding door.

10. Display Cases – Combi-Line

Heated Display Cases









Special Accessories

Price label rail with stopper, intermediate shelf GN 1.5 **33484**
 Price label rail with stopper, intermediate shelf GN 2 **33485**
 Price label rail with stopper, intermediate shelf GN 3 **33486**

The price label rails with stopper for the intermediate shelves can be attached to the front of the glass shelves.

Price label rail, lower display area GN 1.5 **11485**
 Price label rail, lower display area GN 2 **11486**
 Price label rail, lower display area GN 3 **11487**

The price label rails for the lower display areas can be inserted into the tilting bearing profile.

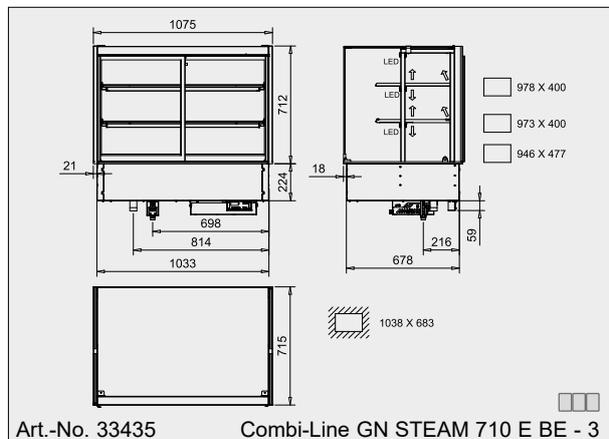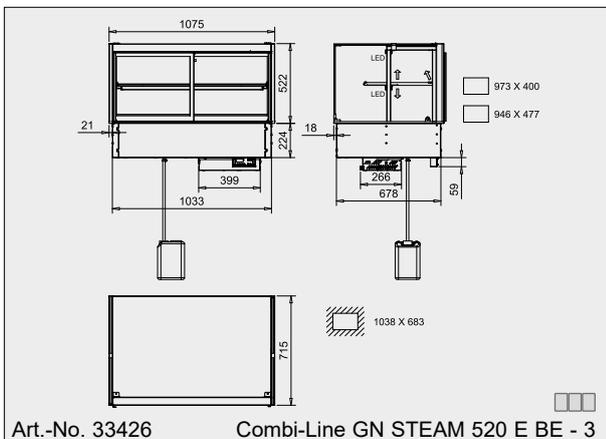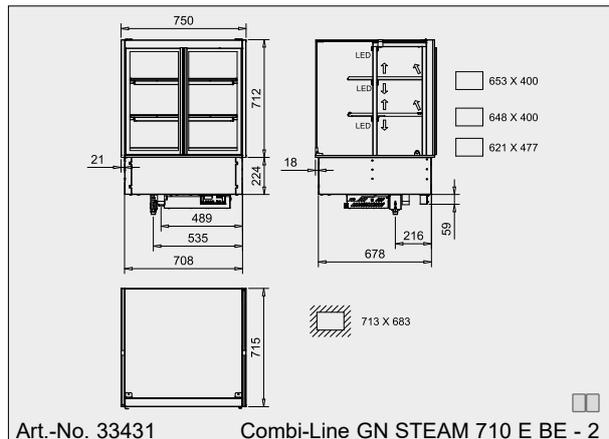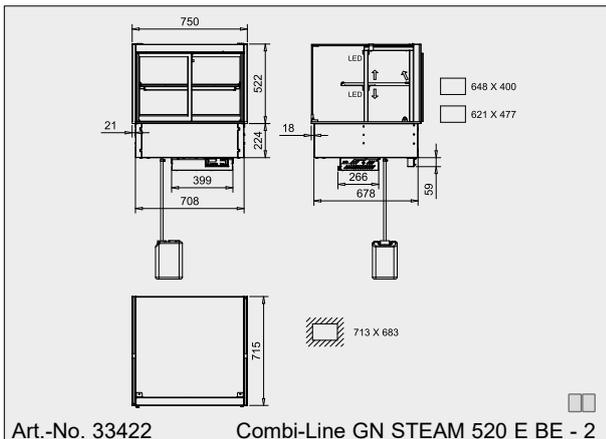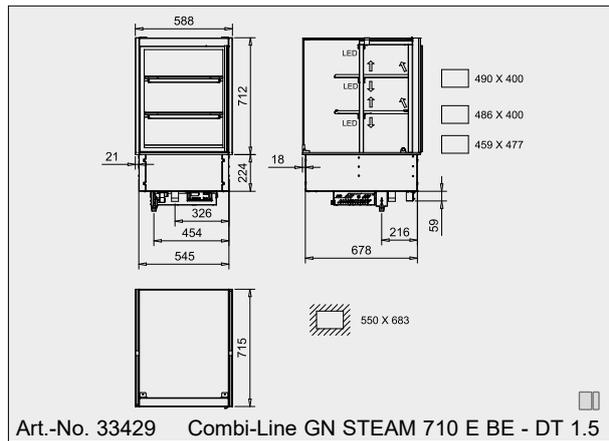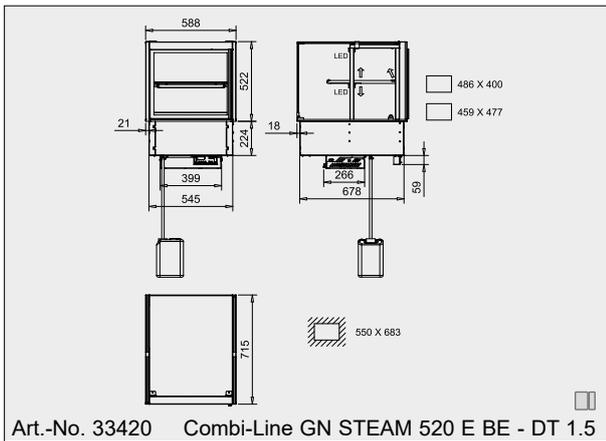

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".

10
Combi-Line
Display Cases