

Front-Counter SB

Self-service version with self-service flaps made of safety glass and outer casing made of stainless steel to place onto the counter construction (without mounting lip)

WiHA
Freshness System
(Special Accessory)
Patented

WiHA
LED
energy-saving & low-maintenance

WiHA
LONG-LIFE
Longer operating life of the cooling unit

WiHA
SPLIT-CONTROL
Flat and removable control panel

WiHA
Soft-Close
(option)
Soft-closing sliding doors
Special Accessory


WiHA
CLOUD

NEW! With **WIHA CLOUD CONTROL**, optionally available, more infos on page 432.

WiHA
Toughened Safety Glass
Self-service flaps made of toughened safety glass

WiHA
MOVE-DOWN
Patented

WiHA
MOVE-AWAY
Patented

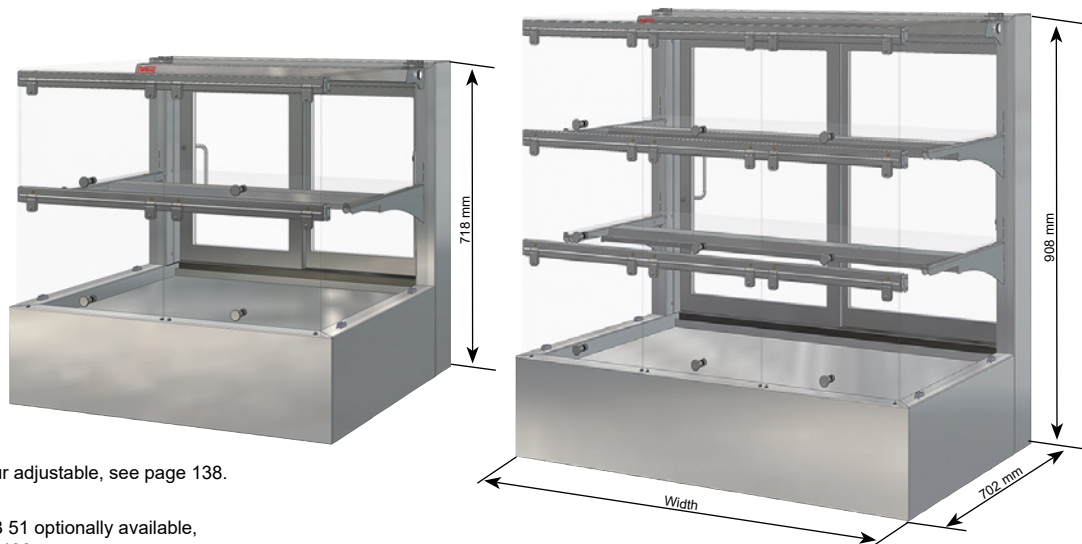

Option: Light colour adjustable, see page 138.

Base element UTB 51 optionally available, see table on page 406.

6
Self-Service
Display Cases

Front-Counter 520 SB	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10° ET]	Connection
Self-service version Height glass top 520 mm										
Front-Counter 520 SB - GN 2 *	23700	23705	23710	23720	23725	23730	750	702	370 W	230V/325W
Front-Counter 520 SB - GN 3	23701	23706	23711	23721	23726	23731	1075	702	370 W	230V/340W
Front-Counter 520 SB - GN 4	23702	23707	23712	23722	23727	23732	1400	702	450 W	230V/400W

The FRESHNESS SYSTEM (circulated air disinfection), WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
* Max. opening width of the sliding door approx. 277 mm.

Front-Counter 710 SB	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10° ET]	Connection
Self-service version Height glass top 710 mm										
Front-Counter 710 SB - GN 2 *	23740	23745	23750	23760	23765	23770	750	702	370 W	230V/350W
Front-Counter 710 SB - GN 3	23741	23746	23751	23761	23766	23771	1075	702	450 W	230V/380W
Front-Counter 710 SB - GN 4	23742	23747	23752	23762	23767	23772	1400	702	605 W	230V/540W

The FRESHNESS SYSTEM (circulated air disinfection), WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
* Max. opening width of the sliding door approx. 277 mm.

Special Accessories

	Art.-No.
Condensate pan mounted under the cooling unit	33266
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Protective machine cover type 370–605	8179
Air cooler for operation with refrigerant CO ₂ (see page 404)	10197
Surcharge for WIHA CLOUD CONTROL (not possible together with option "adjustable light colour")	33577
Option soft-close (soft-closing sliding doors)	4711

Patented WIHA FRESHNESS SYSTEM see page 124.
Suitable price label rails, see page 202.



6. Display Cases – refrigerated for self-service



Description

Refrigerated display case with circulating air for cooling cakes, tarts and snacks.
Self-service version with self-service flaps made of safety glass and outer casing made of stainless steel to place onto the counter construction (without mounting frame).
The customer side has a rounded, angular or slanted glass construction made of safety glass.
The glass shelves can be set at an angle, which means better presentation.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Humidity: approx. 70% to 85%.
Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display, interior pan and exterior are made entirely of stainless steel material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation (CFC-free). Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301.
To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has self-service flaps made of safety glass. The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail). The side glass panes and height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

For external cooling unit

Delivery includes:







- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

6
Self-Service
Display Cases

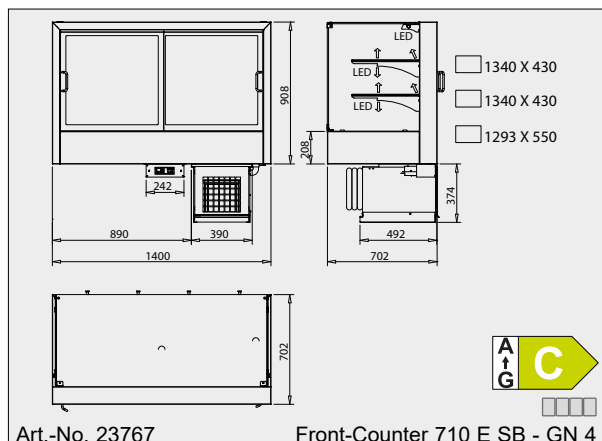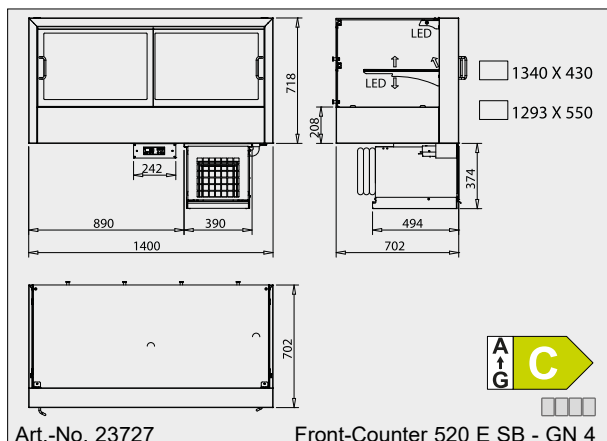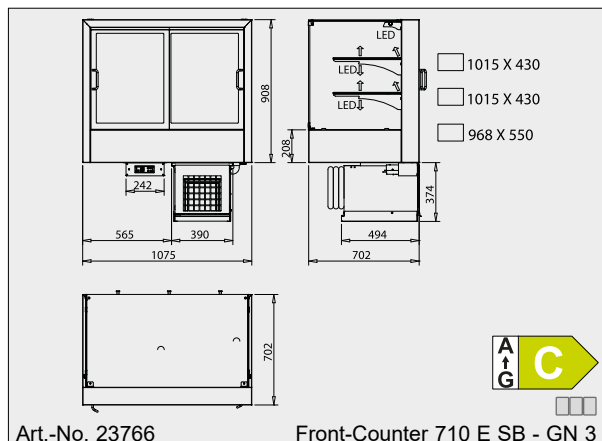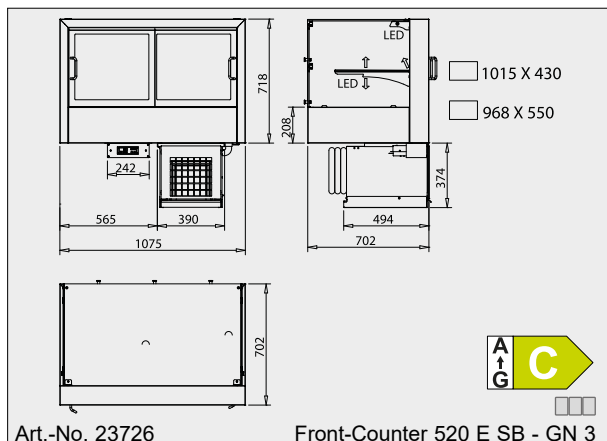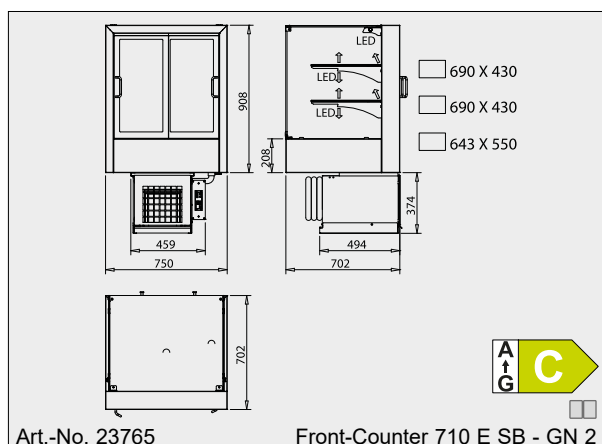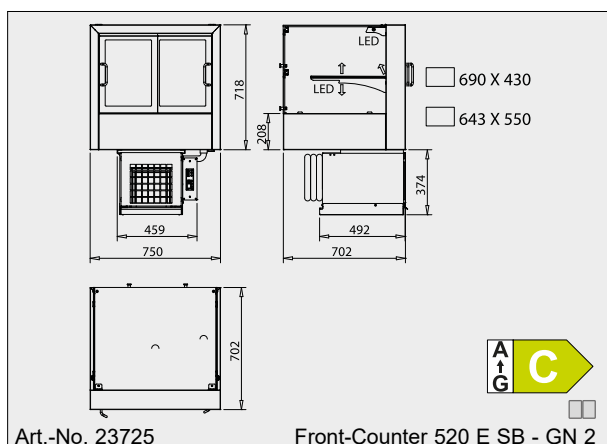

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".