

## 6. Display Cases – refrigerated

for self-service



### Snack-Counter SB-KST-RG

Self-service version with sliding doors on the customer side and closed rear panel

**WiHA**  
**Freshness System**  
(Special Accessory)  
Patented

**WiHA**  
**LED**  
energy-saving &  
low-maintenance

**WiHA**  
**Toughened Safety Glass**  
Sliding doors on the customer side made of toughened safety glass

**WiHA**  
**LONG-LIFE**  
Longer operating life of the cooling unit

**WiHA**  
**MOVE-DOWN**  
Patented

**WiHA**  
**SPLIT-CONTROL**  
Flat and removable control panel

**WiHA**  
**MOVE-AWAY**  
Patented

**WiHA**  
**CLOUD**

**NEW!**  
With **WiHA CLOUD CONTROL**, optionally available, more infos on page 432.



Snack-Counter 520 SB-KST-RG	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angular	slanted	round	angular	slanted			
Self-service version Height glass top 520 mm									
Snack-Counter 520 SB-KST-RG - 2	---	11937	11953	---	11941	11957	750	370 W	230V/325W
Snack-Counter 520 SB-KST-RG - 3	---	11938	11954	---	11942	11958	1075	370 W	230V/340W

The FRESHNESS SYSTEM (circulated air disinfection), WiHA CLOUD CONTROL and condensate pan/drain trap are available as accessories.  
Without base element, the cooling unit is connected via refrigerant couplings.

Snack-Counter 710 SB-KST-RG	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angular	slanted	round	angular	slanted			
Self-service version Height glass top 710 mm									
Snack-Counter 710 SB-KST-RG - 2	11913	11945	11961	11917	11949	11965	750	370 W	230V/350W
Snack-Counter 710 SB-KST-RG - 3	11914	11946	11962	11918	11950	11966	1075	450 W	230V/380W

The FRESHNESS SYSTEM (circulated air disinfection), WiHA CLOUD CONTROL and condensate pan/drain trap are available as accessories.  
Without base element, the cooling unit is connected via refrigerant couplings.

### Special Accessories

Condensate pan, loose  
Drain fitting 1 1/4" for connecting to the customer's drain

**Art.-No.**  
**3819**

**3815**

**Air cooler for operation with refrigerant CO<sub>2</sub>**  
(see page 404)

**10197**

**Surcharge for WiHA CLOUD CONTROL**  
(not possible together with option "adjustable light colour")

**33577**

Sliding door on the customer side (KST), lockable

**10148**

Option: Light colour adjustable, see page 138.

**Patented WiHA FRESHNESS SYSTEM** see page 124.

Suitable price label rails, see page 202.

## Description

Refrigerated display case with circulating air and closed rear panel for cooling cream cakes, cakes and snacks.  
The customer side has sliding doors and rounded, angular or slanted glass construction made of safety glass.  
The glass shelves are height adjustable and can be set at an angle, which means better presentation.  
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).  
Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

## Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has sliding doors made of safety glass. On the rear side with closed rear panel.

The side glass panes and the height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version KST:

The customer side has sliding doors made of safety glass.

For external cooling unit

Delivery includes:





- Expansion valve for R134a/R513A
- Defrost and temperature controller

## Cooling Unit Model

The cooling unit is fully pre-assembled and is connected to the cooling pan with refrigerant couplings.

Please note:

The counter design should include a well-ventilated base unit beneath the refrigerated display case.

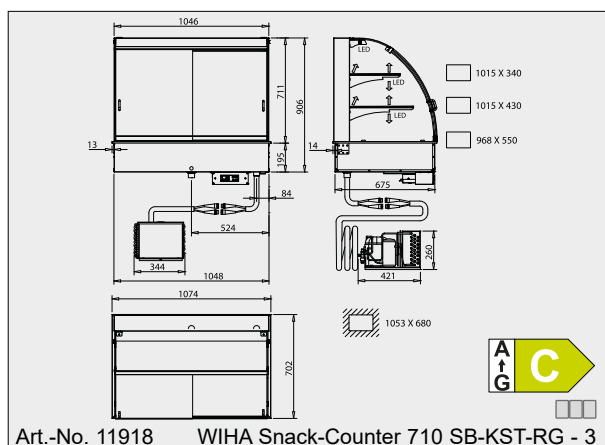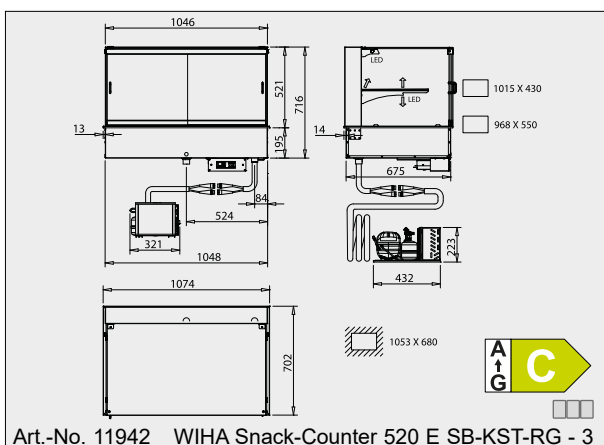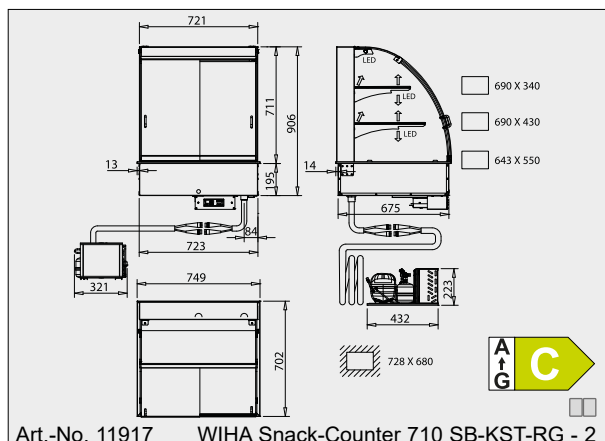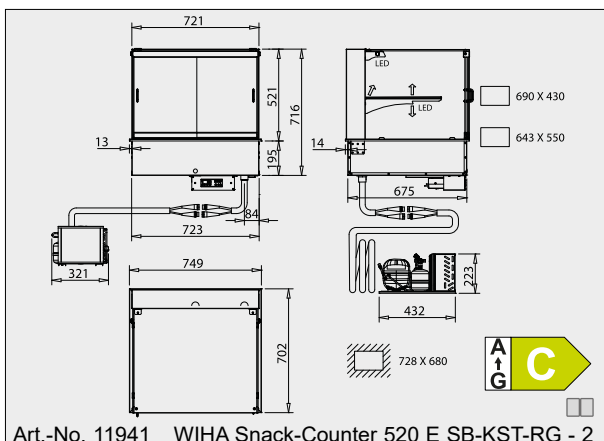

More drawings are available on [www.wiha-web.com](http://www.wiha-web.com) under "Info Centre / Customer Area".