

### Module – Cup Warmer

Height 810 mm

#### Reliable technology for the commercial operation

- Even heat distribution by circulating air heating
- Great heat output (1200 W)
- Stainless-steel telescopic pull-outs
- Service friendly
- For dishwasher racks 500 mm x 500 mm

#### Cup Warmer, Height: 810 mm

This cup warmer and the under counter refrigerators from the "KUB 810" series and the under counter modules (height 810 mm) can be mounted together on base rails (height 40 or 50 mm) to form a block (see chapter 10: KUB 810 and the under counter modules 810 mm). The base rail must be added separately per running metre of body length.

The cup warmer and the under counter modules are designed so that the lower base plate can be removed and this space is available for the installation of connection lines.

If the lateral sides are visible, they must be closed with an on-site decorative plate or with an end plate made of stainless steel (available as accessory).

|  | Art.-No.     |
|--|--------------|
| <b>3 Drawers</b> for dishwasher racks<br>500 mm x 500 mm | <b>13710</b> |
| <b>4 Drawers</b> for dishwasher racks<br>500 mm x 500 mm | <b>13711</b> |

#### Special Accessories

|  | Art.-No.     |
|--|--------------|
| Perforated shelf for a use without<br>dishwasher racks<br>(The usable height of the drawer is reduced by approx. 15 mm.) | <b>13719</b> |
| End plate, stainless steel<br>height 810 mm, depth 600 mm, thickness 20 mm   | <b>9136</b>  |
| Base rail 40 mm high,<br>price per r.m. body length, fully mounted   | <b>9133</b>  |
| Base rail 50 mm high,<br>price per r.m. body length, fully mounted   | <b>9134</b>  |



The 810 mm high cup warmer can be combined easily with the under counter modules (see page 327) or the under counter refrigerators of the series "KUB 810" (see page 311).



#### Design


The circulating air hot cupboard is manufactured as a built-in module, so that it can be integrated into counter installations and wall units.

The special circulating air heating with high performance and robust circulating fan ensures a constant and fast heat distribution. The body of the cupboard is made entirely of stainless steel, material 1.4016. The insulation is mounted on the exterior and is exposed.

The three or four drawers are fitted out with stainless-steel telescopic base units (load capacity 25 kg).

The racks (500 mm x 500 mm) from the dishwasher can be placed directly into the bottomless drawers. By default, the connecting cable is guided to the base area.

|                          |   |
|--------------------------|---|
| Dimensions:              | width 600 mm, height 810 mm,<br>depth body 600 mm,<br>cover panels protruding |
| Effective depth drawers: | Art.-No. 13710: 195/210/175 mm<br>Art.-No. 13711: 125/135/135/175 mm          |
| Electrical connection:   | 230V/50Hz/1300W   |
| Temperature range:       | approx. 30°C to 80°C  |

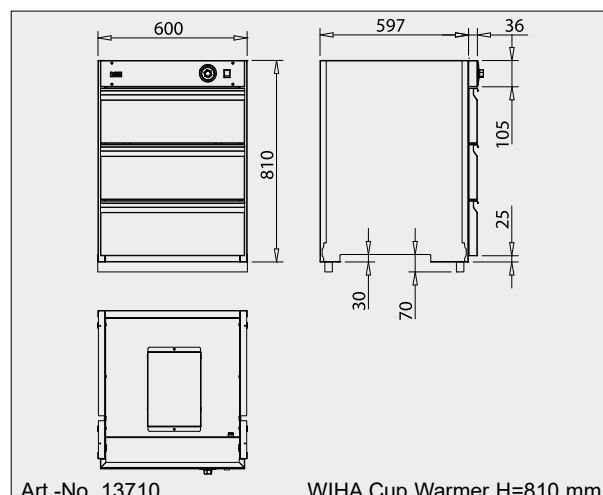

The drawings are shown with special accessory that is not included.