


5. Display Cases – refrigerated

for serve-over




PROFI-Counter 520/710

Refrigerated display case with convertible intermediate shelves



Base element UTB 51 optionally available, see table on page 406.

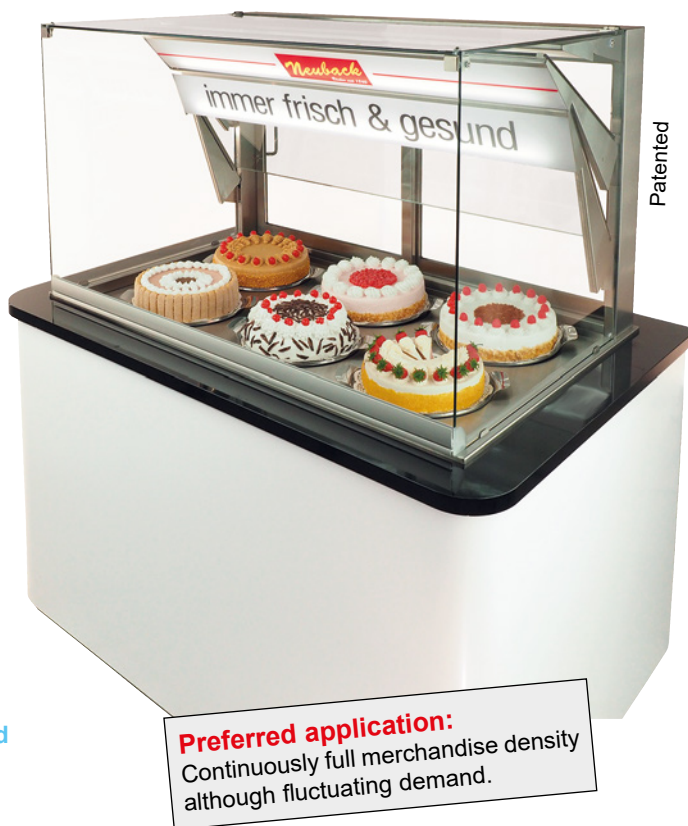

Patented

Preferred application:
Continuously full merchandise density although fluctuating demand.

The PROFI-Counter series

- Increased turnover by full merchandise density
- Clever space management
- Full merchandise density even at 55% load
- Customer-specific advertising banners optional
- ECO models with insulating glass optional
- Highly luminous LED lighting
- With **WIHA CLOUD CONTROL**: smart control and monitoring via the **WIHA app**

Fully loaded merchandise displays. Always!

Goods are self-advertising. That's why sales are more successful with fully filled merchandise displays!

Differently frequented sale zones, different goods depending on the time of the day, fluctuating amount of supplies or daily sales finals – the PROFI-Counter assures a continuously full merchandise density.



Display shelves that are empty and no longer required, e.g. due to sales finals, can be swung out of the clients field of view easily. Always fully loaded merchandise displays and eye-catching, back-lit advertising banners increase sales!

The adjustment of the required selling space is child's play. Gas pressure springs, invisibly installed in the consoles arms, enable an easy movement of the intermediate shelves.





Usable with one or two or three merchandise displays!

(Displayed base element is not part of the delivery.)

PROFI-Counter 520	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	 angular	 angular				
Serve-over version Height glass top 520 mm						
PROFI-Counter 520 E BE - DT 800	25060	25062	922	370	230V/350W	■ ■
PROFI-Counter 520 E BE - 1200	25061	25063	1322	450	230V/400W	■ ■ ■
PROFI-Counter ECO 520 E BE - DT 800	25078	25080	922	370	230V/330W	■ ■
PROFI-Counter ECO 520 E BE -1200	25079	25081	1322	450	230V/340W	■ ■ ■

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors.

PROFI-Counter 710	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	 angular	 angular				
Serve-over version Height glass top 710 mm						
PROFI-Counter 710 E BE - DT 800	25050	25052	922	450 W	230V/480W	■ ■
PROFI-Counter 710 E BE - 1200	25051	25053	1322	605 W	230V/600W	■ ■ ■
PROFI-Counter ECO 710 E BE - DT 800	25054	25056	922	450 W	230V/335W	■ ■
PROFI-Counter ECO 710 E BE -1200	25055	25057	1322	605 W	230V/410W	■ ■ ■

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors.

Special Accessories

Advertising banner per intermediate shelf
incl. typographical rework of the supplied file
in EPS format for printing purpose.
Advertising banner per intermediate shelf
as a monochrome text line in common font.
Condense pan mounted under
the cooling unit
Drain fitting 1 1/4" for connecting
to the customer's drain
Protective machine cover type 370–605

Art.-No.
25058

25059

33266

3815
8179

Air cooler for operation with refrigerant CO₂
(see page 404)

Surcharge for WIHA CLOUD CONTROL

(not possible together with option "adjustable light colour")
Sliding door lockable
Wing door DT lockable
Option soft-close (soft-closing sliding doors)
Price label rail PROFI shelf 800
Price label rail PROFI shelf 1200
Price label rail lower display area 800
Price label rail lower display area 1200

Art.-No.
10197

33577

10147
30005
4711
25067
25068
11492
11491

Patented WIHA FRESHNESS SYSTEM see page 124.

Description

Refrigerated display case with circulating air and convertible merchandise displays for cooling cakes, cream cakes and snacks. On the customer side with angular glass construction made of safety glass. The convertible merchandise displays ensure continuously full merchandise density even with fluctuating quantities of goods.

PROFI-Counter 520/710 E BE:

Temperature < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953)

PROFI-Counter 520/710 ECO E BE:

Temperature < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel, material 1.4301.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. The front glass pane of the PROFI-Counter 520/710 E BE is made of safety glass and can be swung outwards for easy cleaning. The side glass panes and the shelves are also made of safety glass.

The PROFI-Counter ECO 520/710 E BE is equipped with an insulating glazing made of laminated safety glass on all sides. The front glass pane can be swung outwards for easy cleaning. The shelves are made of safety glass.

For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Euro-Norm dimensions (400 mm x 600 mm or 400 mm x 300 mm). The LED lighting is equipped with a wide and transparent protective cover. The protective covers of the LED lighting are mounted on the convertible merchandise displays and are optionally available with advertising banners. The rotary mounting lip makes the installation of the refrigerated display case easy.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

On the operator side with sliding doors or wing doors made of insulating glass.


For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller


Cooling Unit Model

The cooling unit is encased in a housing made of stainless steel and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

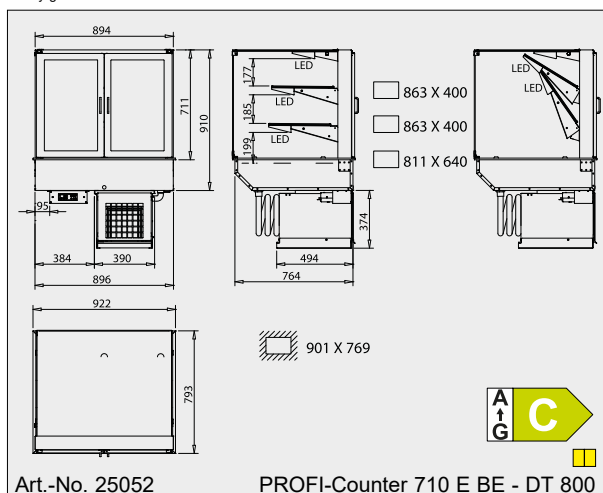

Art.-No. 25052

PROFI-Counter 710 E BE - DT 800

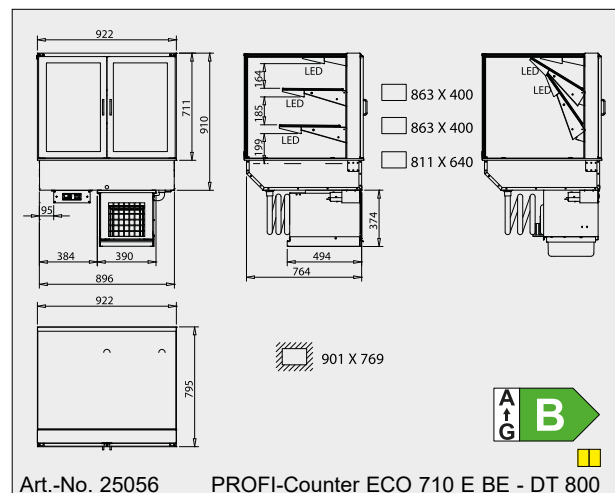

Art.-No. 25056

PROFI-Counter ECO 710 E BE - DT 800

The drawings are shown with special accessory that is not included. The PROFI-Counter 1200s display cases are equipped with sliding doors on the operator side and 40 cm longer. (External dimensions are identical to the refrigerated display case Euro-Counter E BE 1200 and Euro-Counter ECO E BE 1200)