

1. Air Chiller Units

straight installation



1

Straight
Installation

Bottle Cooler PLUS

For self-service with bottle slide and sliding door



Note:
Also available in a stainless-steel look.



NEW! With WIHA CLOUD CONTROL, optionally available, more infos on page 432.

Optimal presentation of the beverages on a bottle slide (first in – first out)! In this way, the beverage bottles are easily accessible for the customer.

- Longer operating life of the cooling unit (LONG-LIFE)
- Easy removal of the bottles
- Constant product pressure
- Energy-saving sliding lids
- With WIHA CLOUD CONTROL: smart control and monitoring via the WiHA app

WIHA Bottle Cooler PLUS	For external cooling unit	With cooling unit and controller	Width [mm]	Depth [mm]	Height body [mm]	Cooling power [-10°ET]	Connection cooling unit	Powder Coating Black
	Art.-No.	Art.-No.						Art.-No.
Bottle Cooler 700 PLUS	19702	19703	700	785	640	450 W	230V/350W	19699

WIHA CLOUD CONTROL and condensate pan/drain trap are available as accessories.

Special Accessories

Condensate pan, loose
Drain fitting 1 1/4" for connecting
to the customer's drain

Art.-No.
3819
3815

TMP 620 controller for external cooling unit
TMP 630-CLOUD controller with 2 freely usable
outputs, for external cooling unit

Art.-No.
12201
33572

Description

Bottle Cooler PLUS with circulating air for cooling beverages. Optimal product presentation with slipping bottle stock, directed to the removal opening on the customer side. In this way, the bottles are easily accessible for the customer. The removal opening is designed with an energy-saving sliding door, which is mounted in a stable sliding door frame.

To clean the lower pan of the Bottle Cooler Plus, the sliding door frame can be removed easily without tools.

Bottle Cooler PLUS, sliding door with loading position: the upper pane can be pushed down after unlocking. In this position the upper area is open so that the device can be quickly stocked with bottles. The integrated bottle slide ensures the replacement of sold bottles (first in – first out) and the customer view on a full assortment up to the last bottle.

Temperature: 6 °C to 12 °C

Suitable for a bottle height up to approx. 220 mm.

Commercial product for the installation in stationary food and service counter.

Design

Interior pan is made entirely of stainless steel and is finished with flush threaded drain fitting (1 1/4"). Pressure-injected expanded polyurethane insulation (CFC-free). The exterior and interior are made of stainless steel and the exterior has a ground surface.

Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The bottle cooler is equipped with bottle slide for optimal presentation of the bottles. In loading position, the sliding door is open for an easy loading of the air chiller unit.

For cleaning purpose, the sliding door frame can be removed easily without tools. To clean the interior pan, the carrier insert and the bottle slide can be removed easily and the evaporator can be folded upwards along with the ventilators and air baffles and locked in the top position via gas pressure springs.

For external cooling unit

Delivery includes:


- Expansion valve for R134a/R513A
- Built-in temperature sensor and defrost sensor
- 8 pcs. divider bars

Cooling Unit Model

The cooling unit is fully pre-assembled and is connected to the cooling pan with refrigerant couplings. It comes with the TMP 620 built-in controller that is connected to the cooling unit and cooling pan via cable connectors.

The counter design should include a well-ventilated base unit beneath the cooling pan.

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

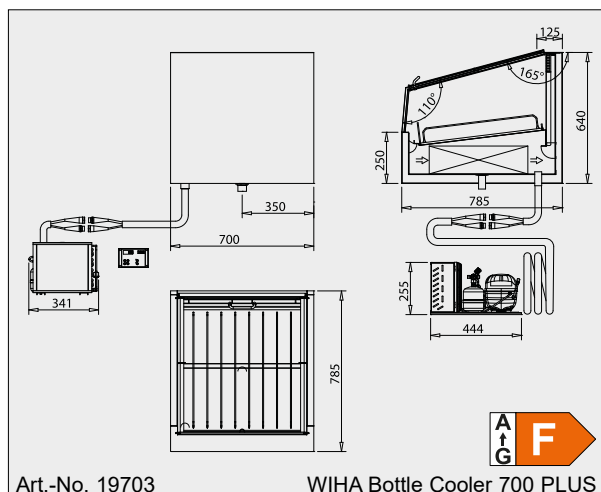

Art.-No. 19703

WIHA Bottle Cooler 700 PLUS

More drawings are available on www.wiha-web.com under "Info Centre / Customer Area".