

### Combi-Line GN COLD 520/710 BE

Present your refrigerated food perfectly

<b>WiHA</b> <b>Freshness System</b> (Special Accessory) Patented	<b>WiHA</b> <b>MOVE-AWAY</b> Patented	<b>WiHA</b> <b>SPLIT-CONTROL</b> Flat and removable control panel
<b>WiHA</b> <b>Toughened Safety Glass</b> Front pane, side panes, upper pane made of toughened safety glass	<b>WiHA</b> <b>LED</b> energy-saving & low-maintenance	<b>WiHA</b> <b>Soft-Close</b> (option) Soft-closing sliding doors Special Accessory
<b>WiHA</b> <b>MOVE-DOWN</b> Patented	<b>WiHA</b> <b>LONG-LIFE</b> Longer operating life of the cooling unit	<b>WiHA</b> <b>CLOUD</b>



**NEW!**  
With **WIHA CLOUD CONTROL**, more infos on page 432.

- Easy to combine
  - Very transparent design – unobstructed view of the goods
  - High-quality lighting emphasises the product freshness
  - Height-adjustable and inclinable glass shelves
  - Lifiable evaporator technology for easy cleaning
  - Coated finned evaporator
  - Patented **MOVE-DOWN** technology and **MOVE-AWAY** technology for easy cleaning
  - Longer operating life of the cooling unit **LONG-LIFE**
  - Longer product freshness thanks to the intelligent fan control **IFC** and the patented **FRESHNESS SYSTEM** (optionally available)
  - **DROP-IN** – easy installation from above
  - With **WIHA CLOUD CONTROL**
- For version **ECO** additionally:
- Energy-saving thanks to insulating glass on all sides
  - No fogging of the front glass pane!  
(At setpoint 6°C, AT=25°C / 60% relative humidity)

Combi-Line GN COLD 520 E BE Combi-Line <b>ECO</b> GN COLD 520 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	angular	angular				
Serve-over version Height glass top 520 mm						
Combi-Line GN COLD 520 E BE - DT 1.5	33370	33371	588	370 W	230V/325W	
Combi-Line GN COLD 520 E BE - 2 *	33372	33373	750	370 W	230V/325W	
Combi-Line GN COLD 520 E BE - DT 2	33374	33375	750	370 W	230V/325W	
Combi-Line GN COLD 520 E BE - 3	33376	33377	1075	370 W	230V/340W	
Combi-Line GN COLD 520 E BE - 4	33378	33379	1400	450 W	230V/400W	
Combi-Line <b>ECO</b> GN COLD 520 E BE - DT 1.5	33380	33381	588	370 W	230V/325W	
Combi-Line <b>ECO</b> GN COLD 520 E BE - 2 *	33382	33383	750	370 W	230V/325W	
Combi-Line <b>ECO</b> GN COLD 520 E BE - DT 2	33384	33385	750	370 W	230V/325W	
Combi-Line <b>ECO</b> GN COLD 520 E BE - 3	33386	33387	1075	370 W	230V/340W	
Combi-Line <b>ECO</b> GN COLD 520 E BE - 4	33388	33389	1400	450 W	230V/345W	

The **FRESHNESS SYSTEM** (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors (model DT 1.5: 1 hinged door; door hinge on the left as standard, can be changed). \* Max. opening width of the sliding door approx. 300 mm.

Combi-Line GN COLD 710 E BE Combi-Line <b>ECO</b> GN COLD 710 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	angular	angular				
Serve-over version Height glass top 710 mm						
Combi-Line GN COLD 710 E BE - DT 1.5	33390	33391	588	370 W	230V/325W	
Combi-Line GN COLD 710 E BE - 2 *	33392	33393	750	370 W	230V/350W	
Combi-Line GN COLD 710 E BE - DT 2	33394	33395	750	370 W	230V/350W	
Combi-Line GN COLD 710 E BE - 3	33396	33397	1075	450 W	230V/380W	
Combi-Line GN COLD 710 E BE - 4	33398	33399	1400	605 W	230V/540W	
Combi-Line <b>ECO</b> GN COLD 710 E BE - DT 1.5	33400	33401	588	370 W	230V/330W	
Combi-Line <b>ECO</b> GN COLD 710 E BE - 2 *	33402	33403	750	370 W	230V/330W	
Combi-Line <b>ECO</b> GN COLD 710 E BE - DT 2	33404	33405	750	370 W	230V/330W	
Combi-Line <b>ECO</b> GN COLD 710 E BE - 3	33406	33407	1075	450 W	230V/340W	
Combi-Line <b>ECO</b> GN COLD 710 E BE - 4	33408	33409	1400	605 W	230V/420W	

The **FRESHNESS SYSTEM** (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors (model DT 1.5: 1 hinged door; door hinge on the left as standard, can be changed). \* Max. opening width of the sliding door approx. 300 mm.

# 10. Display Cases – Combi-Line



## Refrigerated Display Cases

### Special Accessories

Condensate pan mounted under the cooling unit	<b>Art.-No.</b> <b>33266</b>
Drain fitting 1 1/4" for connecting to the customer's drain	<b>3815</b>
Quick-connect cleaning head (On-site drain is necessary!)	<b>6322</b>
Protective machine cover type 370-605	<b>8179</b>

**Air cooler for operation with refrigerant CO<sub>2</sub>** **10197**  
(see page 404)

**Surcharge for exhaust air routing to the operator side**  
(This widens the base element with the cooling unit by 299 mm to the left.)  
UTB 52, 370 – 605 watts **33566**  
UTB 52, 825 watts **33567**







Patented WIHA FRESHNESS SYSTEM 1.5	<b>33476</b>
Patented WIHA FRESHNESS SYSTEM 2	<b>33564</b>
Patented WIHA FRESHNESS SYSTEM 3	<b>6061</b>
Patented WIHA FRESHNESS SYSTEM 4	<b>6063</b>

Price label rail w. stopper, intermediate shelf GN 1.5	<b>Art.-No.</b> <b>33484</b>
Price label rail with stopper, intermediate shelf GN 2	<b>33485</b>
Price label rail with stopper, intermediate shelf GN 3	<b>33486</b>
Price label rail with stopper, intermediate shelf GN 4	<b>33487</b>

Price label rail, lower display area GN 1.5	<b>11485</b>
Price label rail, lower display area GN 2	<b>11486</b>
Price label rail, lower display area GN 3	<b>11487</b>
Price label rail, lower display area GN 4	<b>11488</b>

The price label rails with stopper for the intermediate shelves can be attached to the front of the glass shelves.

The price label rails for the lower display areas can be inserted into the tilting bearing profile.

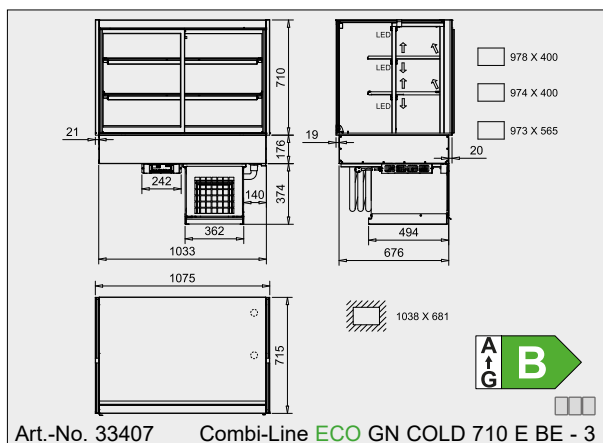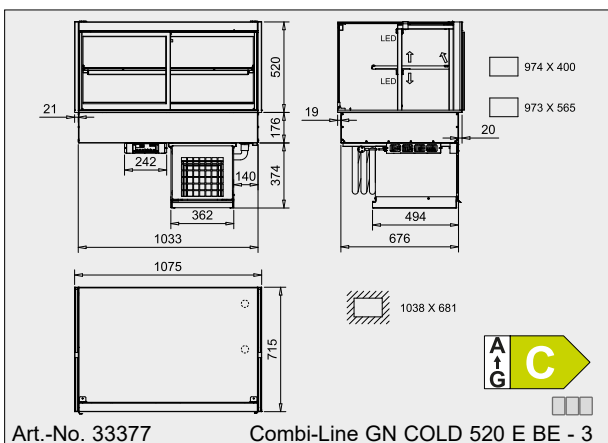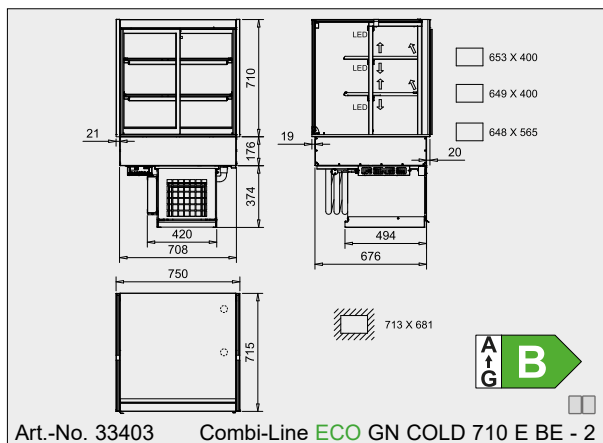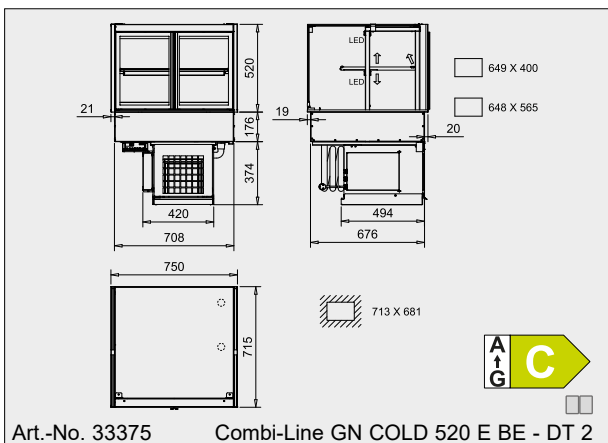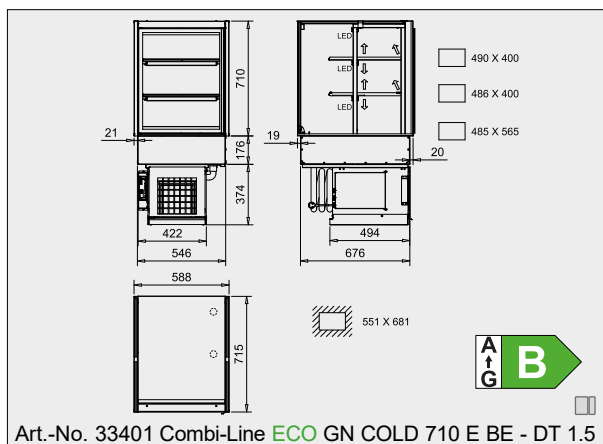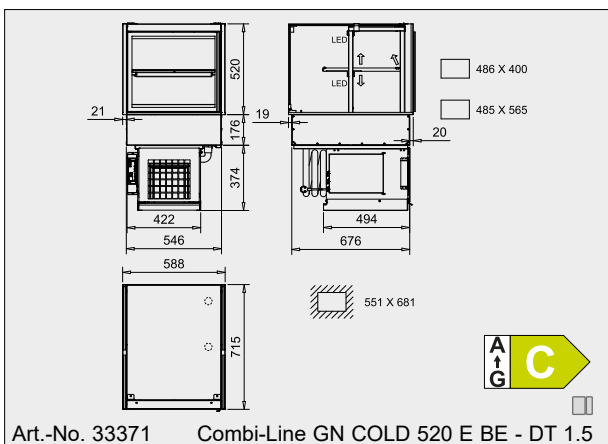

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on [www.wiha-web.com](http://www.wiha-web.com) under "Info Centre / Customer Area".

**10**  
Combi-Line  
Display Cases

### Combi-Line EN COLD 520/710 BE

Present your refrigerated food perfectly

<p><b>Freshness System</b> (Special Accessory) Patented</p>	<p><b>MOVE-AWAY</b> Patented</p>	<p><b>SPLIT-CONTROL</b> Flat and removable control panel</p>
<p><b>Toughened Safety Glass</b> Front pane, side panes, upper pane made of toughened safety glass</p>	<p><b>LED</b> energy-saving &amp; low-maintenance</p>	<p><b>Soft-Close</b> (option) Soft-closing sliding doors Special Accessory</p>
<p><b>MOVE-DOWN</b> Patented</p>	<p><b>LONG-LIFE</b> Longer operating life of the cooling unit</p>	<p><b>CLOUD</b></p>



**NEW!** With **WIHA CLOUD CONTROL**, more infos on page 432.

- Easy to combine
  - Very transparent design – unobstructed view of the goods
  - High-quality lighting emphasises the product freshness
  - Height-adjustable and inclinable glass shelves
  - Lifiable evaporator technology for easy cleaning
  - Coated finned evaporator
  - Patented **MOVE-DOWN** technology and **MOVE-AWAY** technology for easy cleaning
  - Longer operating life of the cooling unit **LONG-LIFE** function
  - Longer product freshness thanks to the intelligent fan control **IFC** and the patented **FRESHNESS SYSTEM** (optionally available)
  - **DROP-IN** – easy installation from above
  - With **WIHA CLOUD CONTROL**: smart control and monitoring via **WIHA app**
- For version **ECO** additionally:
- Energy-saving thanks to insulating glass on all sides
  - No fogging of the front glass pane!  
(At setpoint 6°C, AT=25°C / 60% relative humidity)

Combi-Line EN COLD 520 E BE Combi-Line <b>ECO</b> EN COLD 520 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 520 mm					
Combi-Line EN COLD 520 E BE - DT 400 *	33436	33437	525	370 W	230V/335W
Combi-Line EN COLD 520 E BE - DT 800	33438	33439	925	370 W	230V/350W
Combi-Line EN COLD 520 E BE - 1200	33440	33441	1325	450 W	230V/400W
Combi-Line EN COLD 520 E BE - 1600	33442	33443	1725	605 W	230V/500W
Combi-Line <b>ECO</b> EN COLD 520 E BE - DT 400 *	33444	33445	525	370 W	230V/325W
Combi-Line <b>ECO</b> EN COLD 520 E BE - DT 800	33446	33447	925	370 W	230V/300W
Combi-Line <b>ECO</b> EN COLD 520 E BE - 1200	33448	33449	1325	450 W	230V/340W
Combi-Line <b>ECO</b> EN COLD 520 E BE - 1600	33450	33451	1725	605 W	230V/420W

The **FRESHNESS SYSTEM** (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors (model DT 400: 1 hinged door; door hinge on the left as standard, can be changed). \* Not available with **FRESHNESS SYSTEM**.

Combi-Line EN COLD 710 E BE Combi-Line <b>ECO</b> EN COLD 710 E BE	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
Serve-over version Height glass top 710 mm					
Combi-Line EN COLD 710 E BE - DT 400 *	33452	33453	525	370 W	230V/350W
Combi-Line EN COLD 710 E BE - DT 800	33454	33455	925	450 W	230V/480W
Combi-Line EN COLD 710 E BE - 1200	33456	33457	1325	605 W	230V/600W
Combi-Line EN COLD 710 E BE - 1600	33458	33459	1725	825 W	230V/715W
Combi-Line <b>ECO</b> EN COLD 710 E BE - DT 400 *	33460	33461	525	370 W	230V/330W
Combi-Line <b>ECO</b> EN COLD 710 E BE - DT 800	33462	33463	925	450 W	230V/335W
Combi-Line <b>ECO</b> EN COLD 710 E BE - 1200	33464	33465	1325	605 W	230V/410W
Combi-Line <b>ECO</b> EN COLD 710 E BE - 1600	33466	33467	1725	825 W	230V/580W

The **FRESHNESS SYSTEM** (circulated air disinfection) protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors (model DT 400: 1 hinged door; door hinge on the left as standard, can be changed). \* Not available with **FRESHNESS SYSTEM**.

# 10. Display Cases – Combi-Line



## Refrigerated Display Cases

### Special Accessories

Condensate pan mounted under the cooling unit  
 Drain fitting 1 1/4" for connecting  
 to the customer's drain  
 Quick-connect cleaning head  
 (On-site drain is necessary!)  
 Protective machine cover type 370-605  
 Protective machine cover type 825  
**Air cooler for operation with refrigerant CO<sub>2</sub>**  
 (see page 404)

**Art.-No.**  
**33266**  
**3815**  
**6322**  
**8179**  
**8181**  
**10197**






Price label rail with stopper, intermediate shelf EN 400  
 Price label rail with stopper, intermediate shelf EN 800  
 Price label rail with stopper, intermediate shelf EN 1200  
 Price label rail with stopper, intermediate shelf EN 1600  
 Price label rail, lower display area EN 400  
 Price label rail, lower display area EN 800  
 Price label rail, lower display area EN 1200  
 Price label rail, lower display area EN 1600

**Art.-No.**  
**33488**  
**33489**  
**33490**  
**33491**  
**33483**  
**11492**  
**11491**  
**11490**

**Surcharge for exhaust air routing to the operator side**  
 (This widens the base element with the cooling unit by 299 mm to the left.)  
 UTB 52, 370 – 605 watts **33566**  
 UTB 52, 825 watts **33567**

Patented WIHA FRESHNESS SYSTEM 800 **6061**  
 Patented WIHA FRESHNESS SYSTEM 1200 **6063**  
 Patented WIHA FRESHNESS SYSTEM 1600 **6064**

The price label rails with stopper for the intermediate shelves can be attached to the front of the glass shelves.  
 The price label rails for the lower display areas can be inserted into the tilting bearing profile.

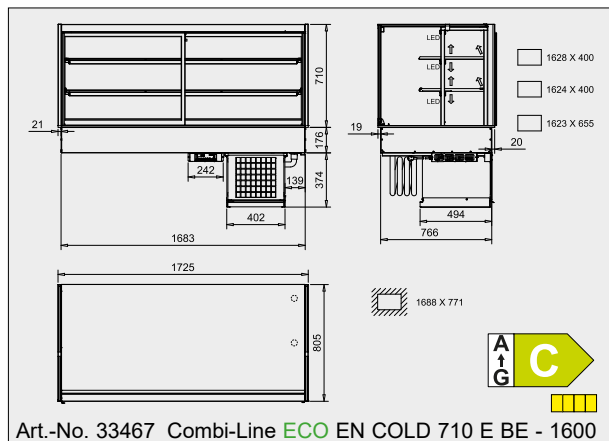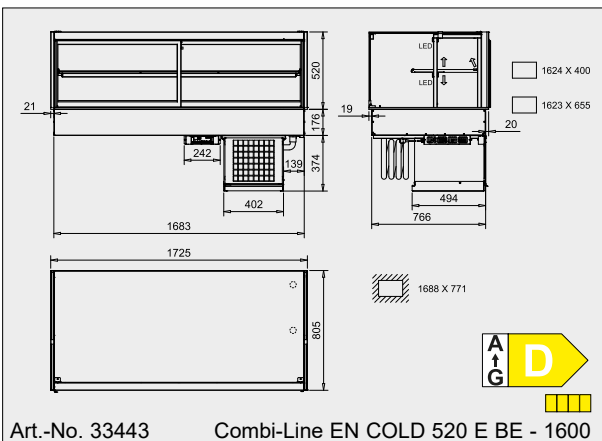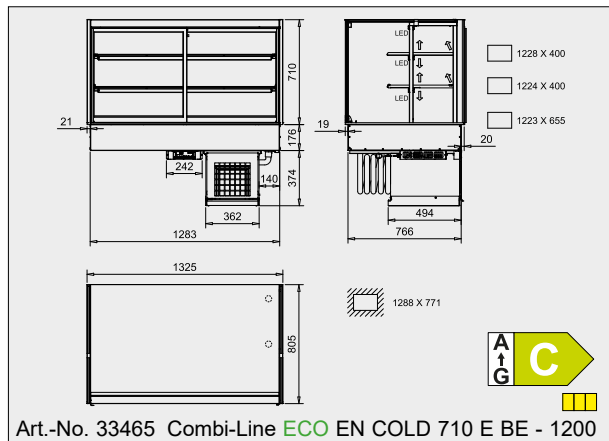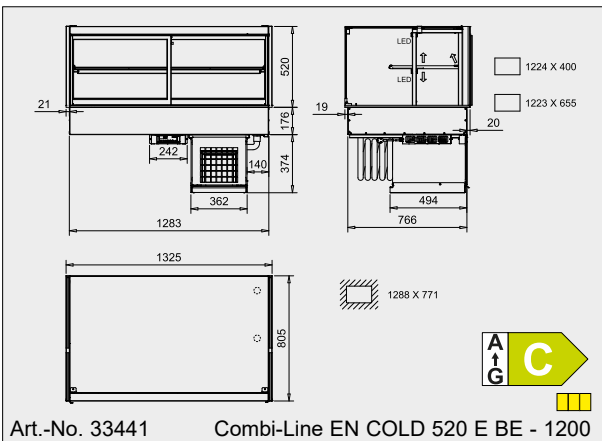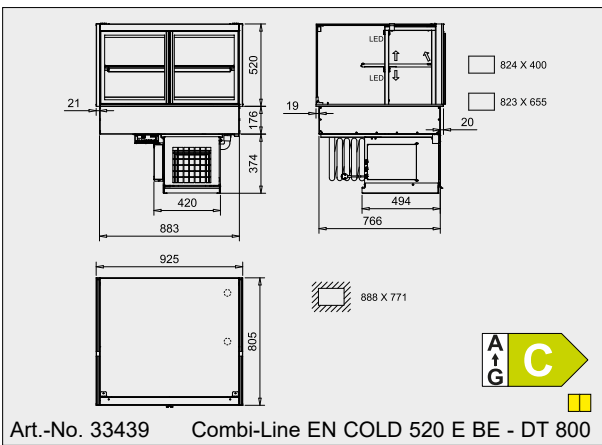

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on [www.wiha-web.com](http://www.wiha-web.com) under "Info Centre / Customer Area".

**10**  
 Combi-Line  
 Display Cases