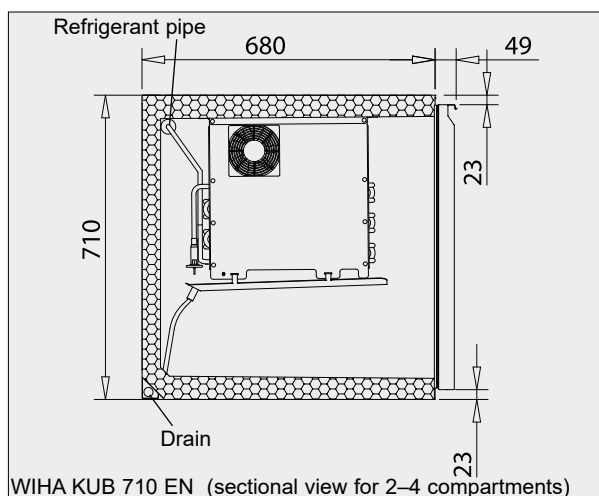
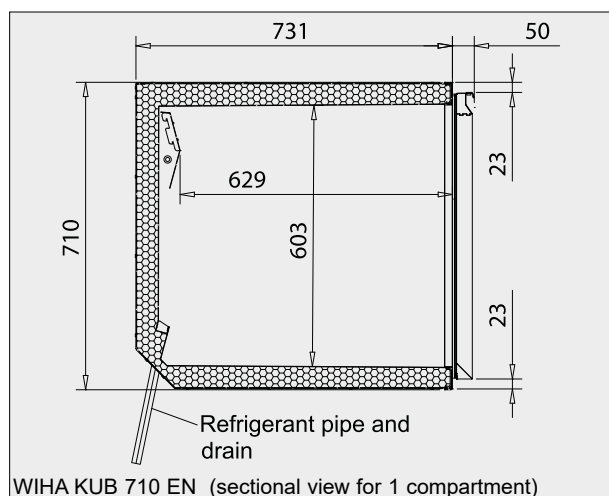


11. Under Counter Refrigerators

KUB 710 EN



KUB 710 EN – Euro-Norm Grid, 710 mm High





Design see page 299.

Also available with black front.








NEW! With WIHA CLOUD CONTROL, optionally available, more infos on page 432.





For external cooling unit without controller		For external cooling unit with controller		Incl. cooling unit with controller	
Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Recom. cooling power: 200W/-15°ET (Delivery without expansion valve)		Cooling power: 200W/-15°ET Elec. connection: 230V/50Hz/240W	
Art.-No. 9249 (*)		Art.-No. 20930 (*)		Art.-No. 9253 (*)	
Art.-No. 9248 (*)		Art.-No. 20931 (*)		Art.-No. 9252 (*)	

(*) Please note the body depth of 730 mm.

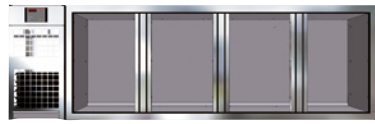
Height: 710 mm, depth: 730 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 290W/-10°ET	Recommended cooling power: 290W/-10°ET	Cooling power: 290W/-10°ET Elec. connection: 230V/50Hz/270W
 1110 mm Art.-No. 9002	 1260 mm Art.-No. 20932	 1460 mm Art.-No. 9107
 1110 mm Art.-No. 9003	 1260 mm Art.-No. 20933	 1460 mm Art.-No. 9108

Height: 710 mm, depth: 680 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 360W/-10°ET	Recommended cooling power: 360W/-10°ET	Cooling power: 360W/-10°ET Elec. connection: 230V/50Hz/335W
 1665 mm Art.-No. 9006	 1815 mm Art.-No. 20934	 2015 mm Art.-No. 9103
 1665 mm Art.-No. 9007	 1815 mm Art.-No. 20935	 2015 mm Art.-No. 9104

Height: 710 mm, depth: 680 mm + 49 mm

For external cooling unit without controller	For external cooling unit with controller	Incl. cooling unit with controller
Recommended cooling power: 430W/-10°ET	Recommended cooling power: 430W/-10°ET	Cooling power: 430W/-10°ET Elec. connection: 230V/50Hz/380W
 2220 mm Art.-No. 9339	 2370 mm Art.-No. 20936	 2570 mm Art.-No. 9343
 2220 mm Art.-No. 9338	 2370 mm Art.-No. 20937	 2570 mm Art.-No. 9342

Height: 710 mm, depth: 680 mm + 49 mm

11. Under Counter Refrigerators

KUB 710 EN



Inserts KUB 710 EN

Wing Door DIN Left with 1 supporting grid usable height 595 mm Art.-No. 9211	
Wing Door DIN Right with 1 supporting grid usable height 595 mm Art.-No. 9212	
Wing Door DIN Left with 5 pairs of bearing rails for EN trays Art.-No. 9115	
Wing Door DIN Right with 5 pairs of bearing rails for EN trays Art.-No. 9116	

Wing Door DIN Left, Glass with 1 supporting grid usable height 595 mm Art.-No. 9432	
Wing Door DIN Right, Glass with 1 supporting grid usable height 595 mm Art.-No. 9433	
Wing Door DIN Left, Glass with 5 pairs of bearing rails Art.-No. 9434	
Wing Door DIN Right, Glass with 5 pairs of bearing rails Art.-No. 9435	

Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 177 mm top, 347 mm bottom Art.-No. 9008	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 338 mm top, 177 mm bottom Art.-No. 9010	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 267 mm top, 260 mm bottom Art.-No. 9009	
Stainless Steel Roller Drawer (drawer with overlength, load 100 kg) eff. height 180 mm / 150 mm / 135 mm Art.-No. 9011	

Usable dimensions of the drawers for KUB – EN

Usable height [mm]	Usable area Width/Depth	Type of the bottles	Dimension of the bottles D [mm] x H [mm]	Number of bottles	GN container
347	W 382 mm D 510 mm	PET 1,5 l PET 1,0 l Wine 0,7 l	94 x 337 81 x 299 78 x 311	20 24 30	3x GN 1/3-150 6x GN 1/6-150
257	W 382 mm D 510 mm	Water 0,25 l Beer 0,33 l PET 0,5 l	58 x 216 61 x 234 65 x 233	56 48 42	3x GN 1/3-150 6x GN 1/6-150
177	W 382 mm D 510 mm				3x GN 1/3-100 6x GN 1/6-100
147	W 382 mm D 510 mm				3x GN 1/3-100 6x GN 1/6-100

Description

Under counter refrigerator for cooling foodstuffs in the bakery sector.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Note:

A second evaporator is necessary, if in a body with 3 or 4 compartments more than one compartment is equipped with roller drawers.

The price of the second evaporator is not included in the price and must be added.

11
Under Counter
Refrigerators

Special Accessories

Surcharge expansion valve for R452A instead R134a/R513A	Art.-No. 9117
EN divider bar for pullout partitioning to accommodate bottles, lockable plastic model	9119
EN divider bar for pullout partitioning to accommodate bottles, fully adjustable metal model	9140
GN bearing rail for EN pullout	9058
Extra EN grid with 2 bottom beams	9121
EN intermediate section behind central bar (small grid for the space between 2 compartments)	9192
Extra pair bearing rails for EN wing door compartment	9052
Base rail, 40 mm high, per r.m. body length	9133
4 round feet, adjustable height approx. 100–140 mm (for 1–2 compartments)	9128
5 round feet, adjustable height approx. 100–140 mm (for 3–4 compartments)	9131
Base retaining bracket for round feet, apiece	9152
Solenoid valve mounted behind the panel	9122
Drill hole 40 mm in body panel	9137
Refrigerant pipes on the rear, centred out of the body	9139
Lock for door or drawer	9157

TMP 610 controller for standard cooling	Art.-No. 12205
TMP 610-CLOUD controller for ext. cooling unit	33575
TMP 610-CLOUD controller instead of TMP 610	33571

Second evaporator for external cooling systems	8099
Second evaporator for ready-to-use refrigerators	8095

LED lighting 12V/8W (height of compartment 710) (incl. transformer 230V/12V)	9444
--	-------------

Mounting Covers

Width 150 mm, height 710 mm

Cover with cut-out for 1 x controller	Art.-No.
TMP 6xx, mounted on the left	21110
Cover with cut-out for 1 x controller	
TMP 6xx, mounted on the right	21111
Cover with cut-outs for 2 x controller	
TMP 6xx, mounted on the left	21112
Cover with cut-outs for 2 x controller	
TMP 6xx, mounted on the right	21113