

6. Display Cases – refrigerated

for self-service





Snack-Counter ECO E SB-KST-VT



Energy-saving display case with circulating air and sliding doors on the customer side, recessed cooling pan, insulating glazing on all sides and LED lighting



NEW! With WiHA CLOUD CONTROL, optionally available, more infos on page 432.

Snack-Counter ECO 520 E SB-KST-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	 angular	 angular			
Self-service version Height glass top 520 mm					
Snack-Counter ECO 520 E SB-KST-VT - 2 *	12160	12161	750	370 W	230V/325W
Snack-Counter ECO 520 E SB-KST-VT - DT 2	12163	12164	750	370 W	230V/325W
Snack-Counter ECO 520 E SB-KST-VT - 3	12165	12166	1075	370 W	230V/340W

WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Snack-Counter ECO 710 E SB-KST-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	 angular	 angular			
Self-service version Height glass top 710 mm					
Snack-Counter ECO 710 E SB-KST-VT - 2 *	12167	12168	750	370 W	230V/330W
Snack-Counter ECO 710 E SB-KST-VT - DT 2	12169	12187	750	370 W	230V/330W
Snack-Counter ECO 710 E SB-KST-VT - 3	12188	12189	1075	450 W	230V/340W

WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting to the customer's drain
Protective machine cover type 370/450
Surcharge for WiHA CLOUD CONTROL
(not possible together with option "adjustable light colour")

Wing doors on the operator side (DT), lockable
Sliding door, lockable
Option soft-close (soft-closing sliding doors) for the operator side

Bearing rails for GN containers, shelves and bottle slide:
Snack-Counter size per GN 1 (1 pair)
Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 202.

Art.-No.
33266
3815
8179
33577

30005
10147
4711

9880

Display shelf, unperforated; width=325 mm, GN 1
(Bearing rails must be ordered separately.)

Bottle slide Snack-Counter GN 2 incl. 10 divider bars GN
Bottle slide Snack-Counter GN 3 incl. 15 divider bars GN

The bottle slide ensures the replacement of sold bottles and the customers view on a full assortment up to the last bottle.
Divider bars for bottle slide 520, single

Suitable price label rails for the intermediate shelves, see page 202.
(Note: Price label rails for the lower merchandise display are not possible.)

Option: Light colour adjustable, see page 138.

Base element UTB 51 optionally available, see table on page 406.

Art.-No.
6413
26467
26468
26457

Description

Energy-saving refrigerated display case with circulating air and recessed cooling pan and sliding doors on the customer side for self-service. The sliding doors on the customer side are equipped with soft-close function (soft-closing sliding doors).
Display case with insulating glazing on all sides for cooling cakes, cream cakes and snacks. ECO-PLUS version with reduced energy consumption.
On the customer side, on the sides and on top with insulating glazing made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%.
Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–150 mm deep) can be mounted or display shelves (available as accessories) can be inserted.
To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN TECHNOLOGY) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The customer side has sliding doors for self-service with soft-close function (soft-closing sliding doors). The height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.
A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different food. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version KST:

The customer side has sliding doors made of insulating glass.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).







For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The powerful cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

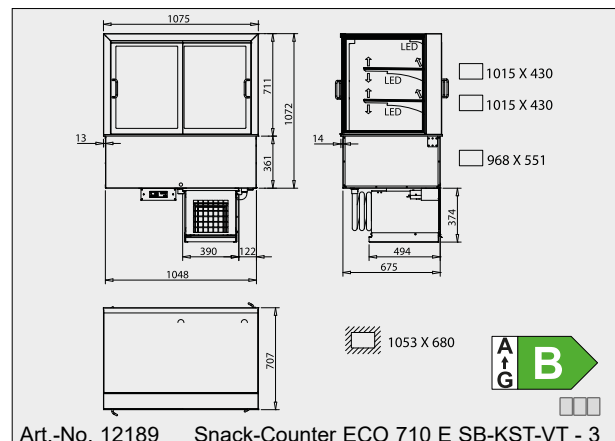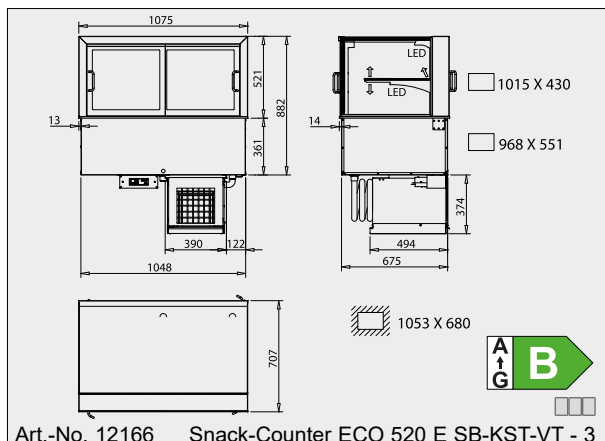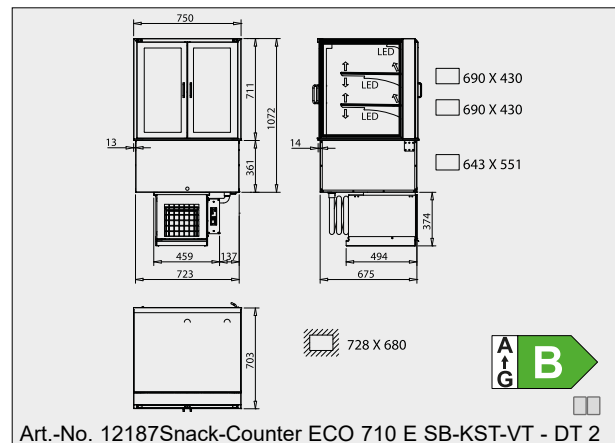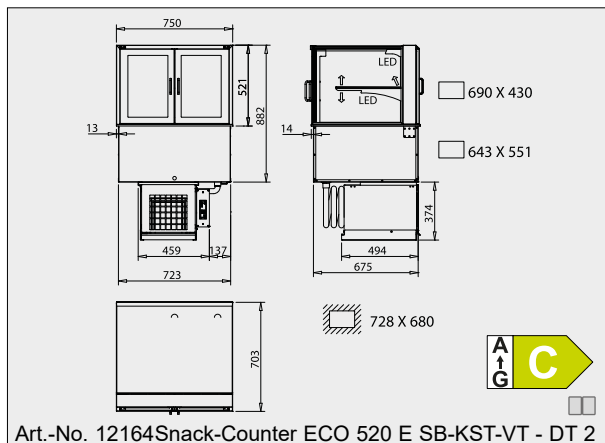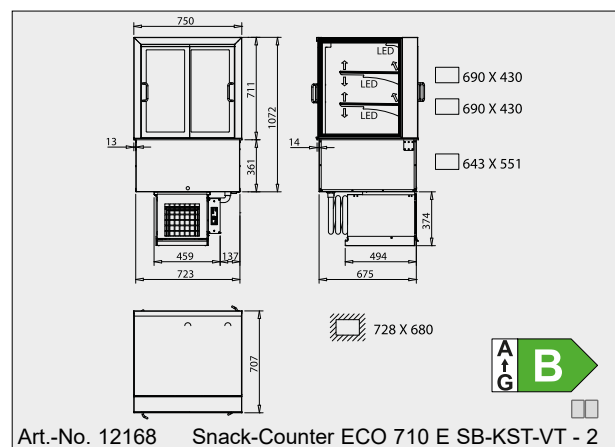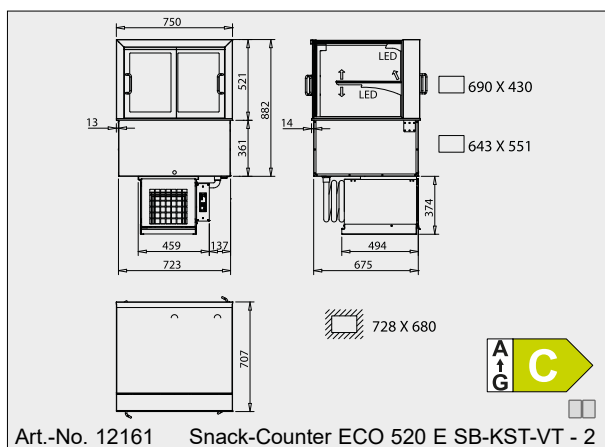

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".