

Snack-Counter MULTI

Refrigerated display case – usable as serve-over version or as self-service version



Base element UTB 51 optionally available, see table on page 406.



NEW! With WIHA CLOUD CONTROL, optionally available, more infos on page 432.

Tip: Visually matching the heated display cases of the Snack-Counter STEAM MULTI series, see page 248.

Snack-Counter MULTI

- Slide-in front glass pane: usable as serve-over counter or as self-service counter
- Available with 430 mm or 520 mm high glass construction
- Optical duplication of the goods thanks to the mirrored doors
- With highly luminous LED lighting
- With WIHA CLOUD CONTROL: smart control and monitoring via the WIHA app

Multifunctional refrigerated display case can be used as serve-over version or as self-service version.

Multifunctional refrigerated display case for cooling food in 50 mm to 150 mm deep Gastro-Norm containers. This display case can be used as serve-over display case or for self-service purposes depending on the current needs. The front glass pane can be simply pushed upwards for self-service operation and at the same time serves as sneeze guard in this position.

The wing doors on the operator side can be removed, so that a quick sale is easily possible.

The Snack-Counter MULTI can be perfectly combined with the heated display cases Snack-Counter STEAM MULTI, because the upper glass construction is optically the same.

Snack-Counter 430 MULTI	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	angular	angular				
Height glass top 430 mm						
Snack-Counter 430 MULTI - 1.5 *	26528	26532	585	370 W	230V/325W	
Snack-Counter 430 MULTI - 2	26529	26533	748	370 W	230V/325W	
Snack-Counter 430 MULTI - 3	26530	26534	1072	370 W	230V/340W	
Snack-Counter 430 MULTI - 4	26531	26535	1398	450 W	230V/400W	

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
* Not available with FRESHNESS SYSTEM.

Snack-Counter 520 MULTI	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection	
	angular	angular				
Height glass top 520 mm						
Snack-Counter 520 MULTI - 1.5 *	26536	26540	585	370 W	230V/325W	
Snack-Counter 520 MULTI - 2	26537	26541	748	370 W	230V/325W	
Snack-Counter 520 MULTI - 3	26538	26542	1072	370 W	230V/340W	
Snack-Counter 520 MULTI - 4	26539	26543	1398	450 W	230V/400W	

WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
* Not available with FRESHNESS SYSTEM.

6. Display Cases – refrigerated for self-service



Special Accessories

Condensate pan mounted under the cooling unit	Art.-No. 33196
Drain fitting 1 1/4" for connecting to the customer's drain	3815
Protective machine cover type 370/450	33194
Air cooler for operation with refrigerant CO₂ (see page 404)	10197
Surcharge for WIHA CLOUD CONTROL (not possible together with option "adjustable light colour")	33577
Patented WIHA FRESHNESS SYSTEM see page 124.	

Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required:
 Separator bar GN 1/1 lengthwise with fixed position in the GN 1/1 grid **6219**
 Separator bar GN 1/1 lengthwise 530 mm **1025**

Separator bar GN 1/1 crosswise 325 mm	Art.-No. 3010
Separator bar GN 1/3 lengthwise with fixed position	6212
Bearing rails for GN containers and shelves	
Snack-Counter size per GN 1 (1 pair)	6158
Snack-Counter size per GN 1.5 (1 pair)	10507
Note: GN 1/1 and GN 2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required.	
Display shelf, unperforated; width=325 mm, GN 1	6218
Display shelf, unperforated; width=486 mm, GN 1.5	10506
(Bearing rails must be ordered separately.)	
Suitable price label rails are available on request.	



The refrigerated display case can be used as server-over version or self-service version. For self-service operation, the front glass pane on the customer side can be opened and slid in so that a sneeze guard is formed and the display case can be used now as a self-service device with sneeze guard.

Front glass pane, side glass panes and the cover glass pane are made of safety glass. For good illumination, a protected LED lighting (standard colour: white) is mounted above the merchandise display. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.

A digital defrosting and temperature controller is mounted above the wing doors on the operator side. Two air speeds can be selected for different foods.

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

The operator side has wing doors, which are mirror-like on the inside but are transparent from the outside (spyglass). The wing doors can be easily removed so that a faster and easier operation at peak times is possible.

For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.

A condensate pan is available as accessory.

Description

Refrigerated display case with circulating air for cooling food in GN containers (up to 150 mm deep) or on display shelves, which are available optionally. Version with angular glass construction made of safety glass, optionally usable as serve-over counter or as self-service counter.

For self-service operation with open glass construction on the customer side:
 Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 For serve-over operation with closed glass construction:
 Temperature: < 5°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
 Humidity: approx. 70% to 85%.
 Commercial product for the installation in stationary food and service counter.





Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean.

Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.

The vertical walls above the evaporator are equipped with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–150 mm deep) can be mounted or display shelves (available as accessories) can be inserted.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN TECHNOLOGY) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

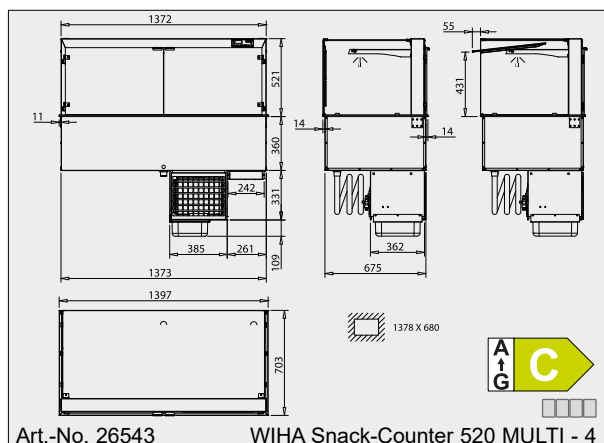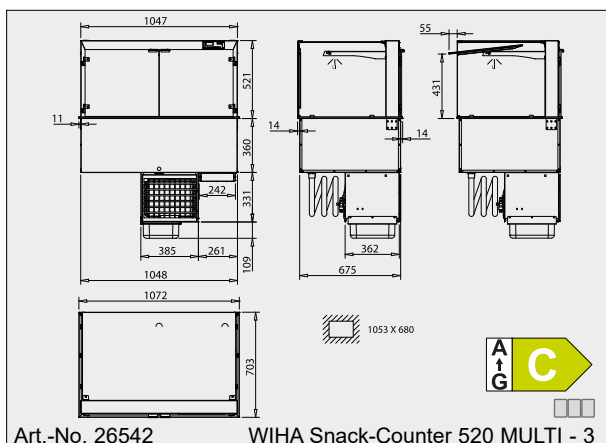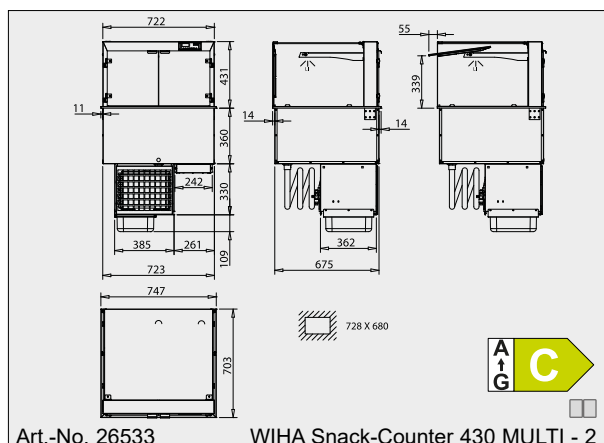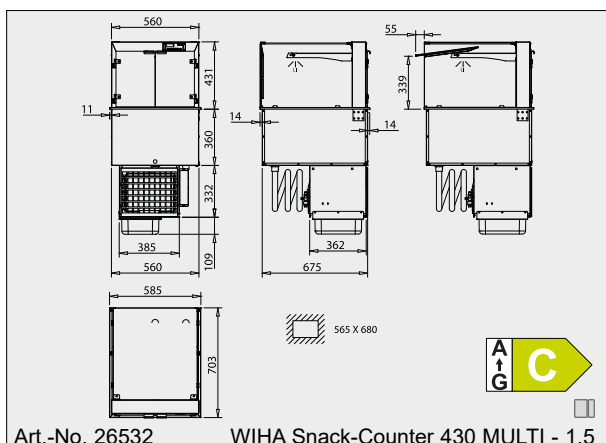

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".