

## 5. Display Cases – refrigerated

for serve-over




### Snack-Counter BE

Serve-over version with rounded, angular or slanted glass construction



**NEW!** With WIHA CLOUD CONTROL, optionally available, more infos on page 432.

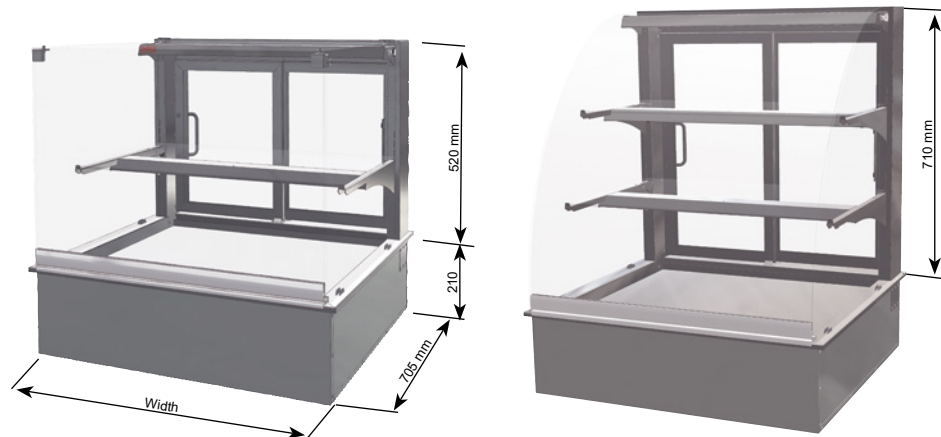

Snack-Counter 520 BE	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angular	slanted	round	angular	slanted			
Serve-over version Height glass top 520 mm									
Snack-Counter 520 BE - DT 1.5 *	10250	10258	17000	10252	10260	17012	587	370 W	230V/325W
Snack-Counter 520 BE - 2 **	9605	9758	17001	9634	9762	17013	750	370 W	230V/325W
Snack-Counter 520 BE - DT 2	9969	9977	17002	9970	9978	17014	750	370 W	230V/325W
Snack-Counter 520 BE - 3	9606	9759	17003	9635	9763	17015	1075	370 W	230V/340W
Snack-Counter 520 BE - 4	9607	9760	17004	9636	9764	17016	1400	450 W	230V/400W
Snack-Counter 520 BE - 5	9608	9761	17005	9637	9765	17017	1725	605 W	230V/530W

The FRESHNESS SYSTEM (circulated air disinfection), WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.

The version "DT" has wing doors on the operator side instead of sliding doors.

\* Not available with FRESHNESS SYSTEM. \*\* Max. opening width of the sliding door approx. 277 mm.

Snack-Counter 710 BE	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angular	slanted	round	angular	slanted			
Serve-over version Height glass top 710 mm									
Snack-Counter 710 BE - DT 1.5 *	10251	10259	17006	10253	10261	17018	587	370 W	230V/325W
Snack-Counter 710 BE - 2 **	9614	9774	17007	9642	9778	17019	750	370 W	230V/350W
Snack-Counter 710 BE - DT 2	9973	10014	17008	9974	10015	17020	750	370 W	230V/350W
Snack-Counter 710 BE - 3	9615	9775	17009	9643	9779	17021	1075	450 W	230V/380W
Snack-Counter 710 BE - 4	9616	9776	17010	9644	9780	17022	1400	605 W	230V/540W
Snack-Counter 710 BE - 5	9617	9777	17011	9645	9781	17023	1725	825 W	230V/715W

The FRESHNESS SYSTEM (circulated air disinfection), WIHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.

The version "DT" has wing doors on the operator side instead of sliding doors.

\* Not available with FRESHNESS SYSTEM. \*\* Max. opening width of the sliding door approx. 277 mm.

Base element UTB 51 optionally available, see table on page 406.

Option: Light colour adjustable, see page 138.

### Special Accessories

Condensate pan mounted under the cooling unit  
Drain fitting 1 1/4" for connecting to the customer's drain  
Protective machine cover type 370-605  
Protective machine cover type 825

Art.-No.

33266

3815

8179

8181

Air cooler for operation with refrigerant CO<sub>2</sub> (see page 404)

10197

Surcharge for WIHA CLOUD CONTROL

(not possible together with option "adjustable light colour")

Sliding door lockable

Wing door DT lockable

Option soft-close (soft-closing sliding doors)

Art.-No.

33577

10147

30005

4711

Suitable price label rails see page 136.

Display case connectors Snack-Counter see page 135.

Patented WIHA FRESHNESS SYSTEM see page 124.

### Description

Refrigerated display unit with circulating air for cooling cakes, tarts and snacks.  
On the customer side with rounded, angular or slanted glass construction made of safety glass.  
The glass shelves are height adjustable and can be set at an angle, which means better presentation.  
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).  
Humidity: approx. 70% to 85%.  
Commercial product for the installation in stationary food and service counter.

### Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel, material 1.4301.  
To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).  
The front glass pane is made of safety glass and can be swung outwards for easy cleaning. The side glass panes and the height adjustable shelves are also made of safety glass. For good illumination,

a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy.  
A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).  
**With WIHA-LONG-LIFE for a longer operating life of the cooling unit.**

#### Version DT:

The operator side has wing doors made of insulating glass.

#### Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).







#### For external cooling unit

##### Delivery includes:

- Expansion valve for R134a/R513A
- Digital defrost and temperature controller

### Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.  
A condensate pan is available as accessory.

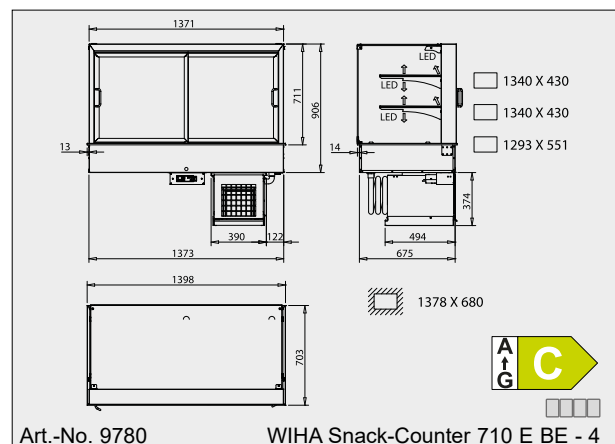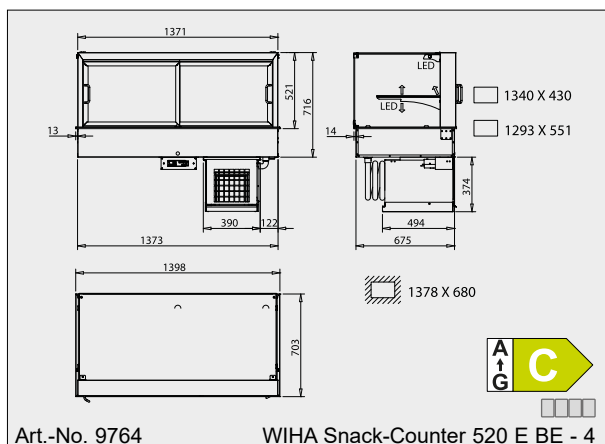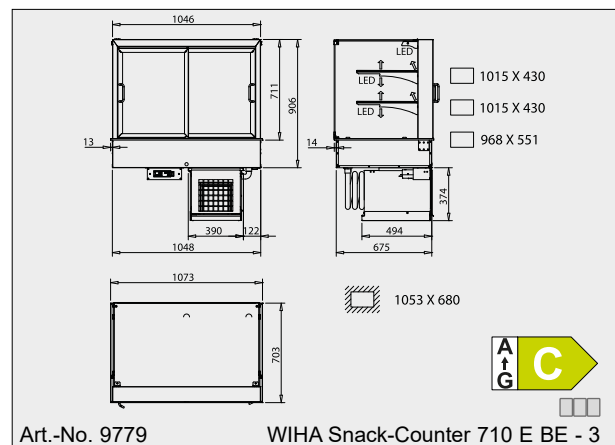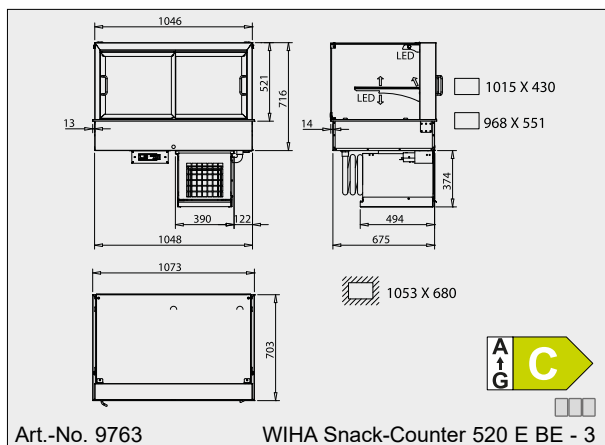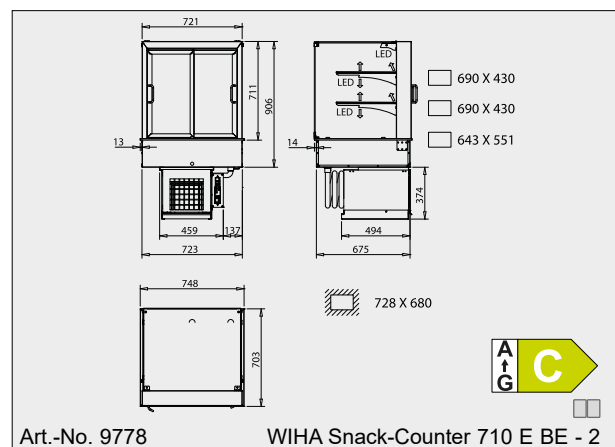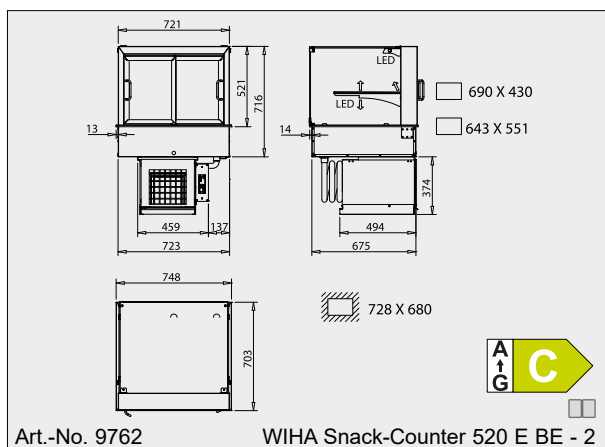

The drawings are shown with special accessory that is not included; more drawings are available on [www.wiha-web.com](http://www.wiha-web.com) under "Info Centre / Customer Area".