

Snack-Counter 870 E BE-VT

Serve-over version with 3 intermediate shelves and deep cooling pan in GN size






5
Serve-Over
Display Cases

NEW! With WiHA CLOUD CONTROL, optionally available, more infos on page 432.

Option: Light colour adjustable, see page 138.

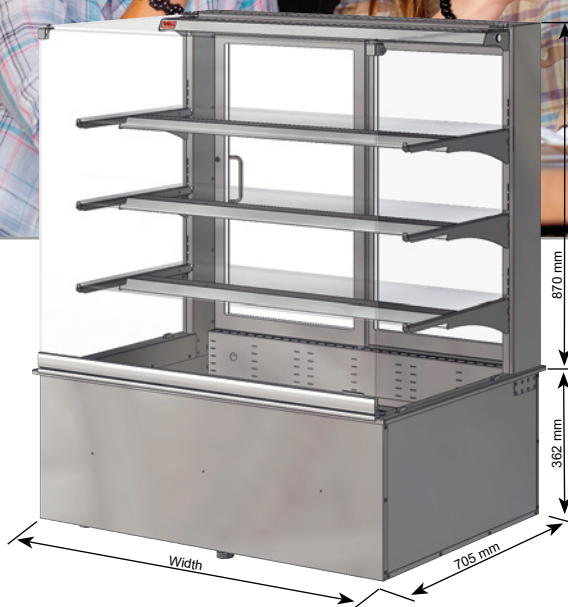Base element UTB 51 optionally available, see table on page 406.



Snack-Counter 870 E BE-VT	For external cooling unit incl. controller	With cooling unit and controller	Width [mm]	Cooling power [-10°ET]	Connection
	 angular	 angular			
Serve-over version Height glass top 870 mm					
Snack-Counter 870 E BE-VT - 2 *	11508	11512	750	605 W	230V/325W
Snack-Counter 870 E BE-VT - DT 2	11526	11527	750	605 W	230V/325W
Snack-Counter 870 E BE-VT - 3	11509	11513	1075	605 W	230V/340W
Snack-Counter 870 E BE-VT - 4	11510	11514	1400	825 W	230V/400W
Snack-Counter 870 E BE-VT - 5	11511	11515	1725	1060 W	230V/530W

WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories. The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting to the customer's drain
Protective machine cover type 605
Protective machine cover type 825–1060
Air cooler for operation with refrigerant CO₂ (see page 404)
Surcharge for WiHA CLOUD CONTROL (not possible together with option "adjustable light colour")

Art.-No.
33196

3815
33194
33195
10197

33577

Option soft-close (soft-closing sliding doors)

4711

Sliding door lockable
Wing door DT lockable
Bearing rails for GN containers and shelves (1 pair)

Note: GN1/1 and GN2/4 containers can be mounted directly, for smaller GN containers additional separator bars are required, see page 136.
Display shelf, unperforated; Width=325 mm (Bearing rails no. 9880 must be ordered separately.)

Art.-No.
10147
30005

9880

6413

Suitable price label rails see page 136.

5. Display Cases – refrigerated

for serve-over



Description

Refrigerated display case with circulating air and recessed cooling pan for cooling beverages, salads, delicacies, cakes, cream cakes and snacks.
On the customer side with angular glass construction made of safety glass.
The glass shelves are height adjustable and can be set at an angle, which means better presentation.
Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Humidity: approx. 70% to 85%.
Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel, material 1.4301. Recessed inner pan is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation.
The vertical walls above the evaporator are provided with a perforation for vertically adjustable bottom beams (available as accessories). Gastro-Norm containers (50–100 mm deep) can be mounted or display shelves (available as accessories) can be inserted.
To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. The evaporator can be folded down and away from the merchandise display for easy cleaning (MOVE-DOWN FUNCTION). To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).
The front glass pane on the customer side is made of safety glass and can be swung outwards for easy cleaning. The side glass panes and the height adjustable shelves are also made of safety glass.

For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm dimensions. The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).
With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

Version DT:

The operator side has wing doors made of insulating glass.

Otherwise:

The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit


Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller


Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.
A condensate pan is available as accessory.


5
Serve-Over
Display Cases

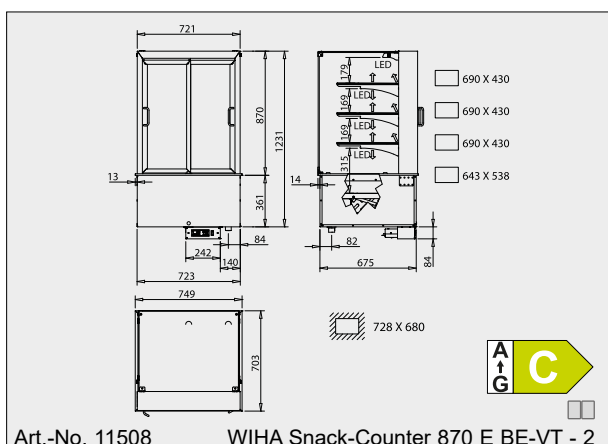


Art.-No. 11508 WIHA Snack-Counter 870 E BE-VT - 2

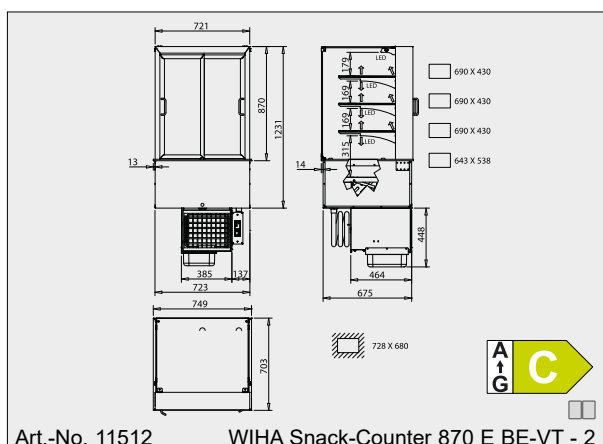


Art.-No. 11512 WIHA Snack-Counter 870 E BE-VT - 2

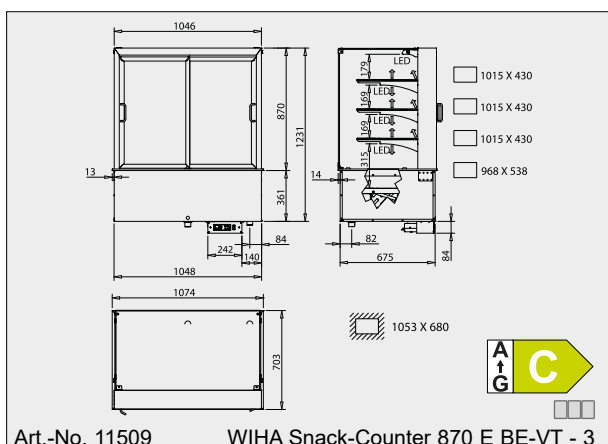


Art.-No. 11509 WIHA Snack-Counter 870 E BE-VT - 3

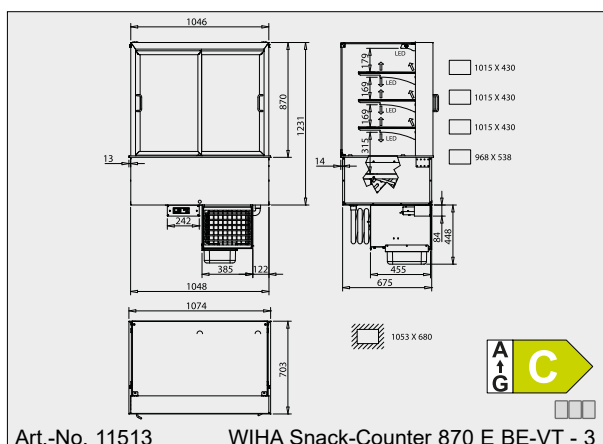

Art.-No. 11513 WIHA Snack-Counter 870 E BE-VT - 3

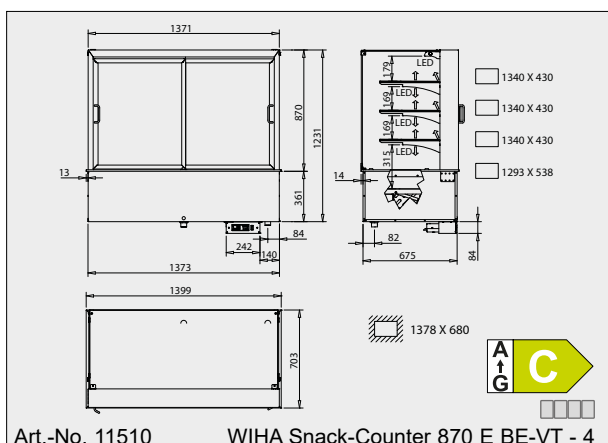

Art.-No. 11510 WIHA Snack-Counter 870 E BE-VT - 4

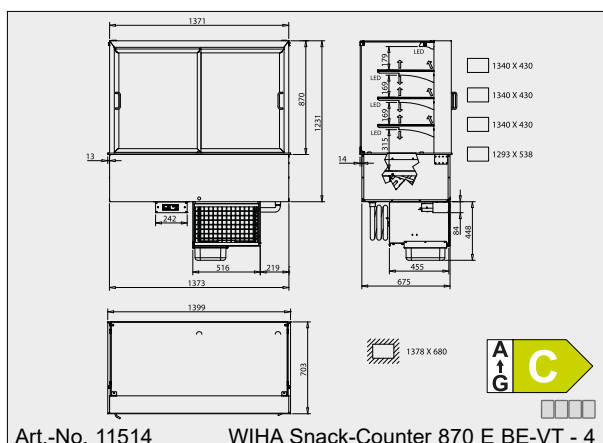

Art.-No. 11514 WIHA Snack-Counter 870 E BE-VT - 4

The drawings are shown with special accessory that is not included; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".