

5. Display Cases – refrigerated

for serve-over



Euro-Counter DRAWER

Serve-over version with drawer

WiHA
Freshness System
(Special Accessory)
Patented

WiHA
LONG-LIFE
Longer operating life of the cooling unit

WiHA
CLOUD

NEW! With WiHA CLOUD CONTROL, optionally available, more infos on page 432.

WiHA
Toughened Safety Glass
Front pane, side panes, upper pane made of toughened safety glass

WiHA
SPLIT-CONTROL
Flat and removable control panel

WiHA
MOVE-DOWN
Patented

WiHA
Soft-Close
(option)
Soft-closing sliding doors
Special Accessory

WiHA
MOVE-AWAY
Patented

WiHA
LED
energy-saving & low-maintenance



Display case with 3 refrigerated levels for Euro-Norm trays (400 mm x 600 mm)

Euro-Counter 710 DRAWER BE	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Cooling power [-10°ET]	Connection
	round	angular	slanted	round	angular	slanted			
Serve-over version Height glass top 710 mm									
Euro-Counter 710 DRAWER BE - 800	11220	11222	17312	11224	11226	17314	922	370 W	230V/335W
Euro-Counter 710 DRAWER BE - 1200	11221	11223	17313	11225	11227	17315	1322	450 W	230V/410W

The refrigerated display cases for external cooling units include an expansion valve for R134a/R513A and temperature controller. The FRESHNESS SYSTEM (circulated air disinfection), WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting to the customer's drain
Protective machine cover type 370/450

Art.-No.
33266
3815
33194

Surcharge for WiHA CLOUD CONTROL 33577
(not possible together with option "adjustable light colour")

Worktop on drawer front 800 11228
Worktop on drawer front 1200 11229
Packing paper holder (CNS) 800 11230
Packing paper holder (CNS) 1200 11231

Option soft-close (soft-closing sliding doors)

Art.-No.
4711

Price label rail glass shelf 800 11245
Price label rail glass shelf 1200 11246

Price label rail lower display area 800 11492
Price label rail lower display area 1200 11491

Option: Light colour adjustable, see page 138.

Patented WiHA FRESHNESS SYSTEM see page 124.

Description

Refrigerated display unit with circulating air and merchandise drawer for cooling cakes, cream cakes and snacks. On the customer side with rounded, angular or slanted glass construction made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation.

Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).
Humidity: approx. 70% to 85%.

Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display and interior pan are made entirely of stainless steel material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation. The exterior is made of galvanised sheet steel. Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise drawer. Drawer on both sides with ball bearing drawer runners (CNS), load capacity up to 100 kg. Drawer cover with upper handle bar.

To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards on the customer side and locked in the top position via gas pressure springs. The front glass pane is made of safety glass. It can be swung outwards for easy cleaning. The side glass panes and shelves are also made of safety glass. For good illumination, a protected LED light

(standard colour: white) is mounted above each shelf. The shelves are suitable for Euro-Norm dimensions (400 mm x 600 mm or 400 mm x 300 mm). The mounting lip makes installation easy. A digital defrosting and temperature controller is mounted beneath the cooling pan. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

The operator side, located above the merchandise drawer, has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail).

For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model

The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing.


A condensate pan is available as accessory.



Euro-Counter 710 E (angular)




Euro-Counter 710 S (slanted)

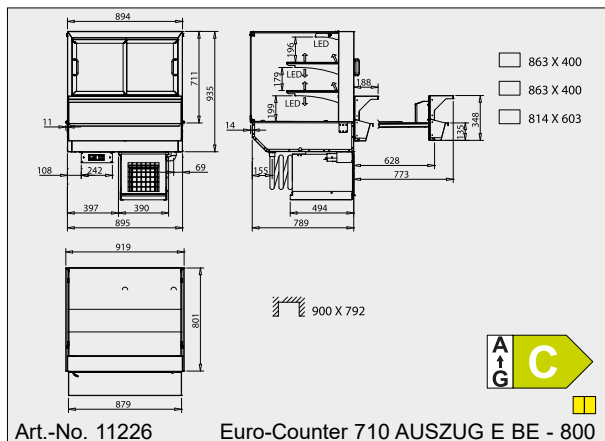


Art.-No. 11226

Euro-Counter 710 AUSZUG E BE - 800

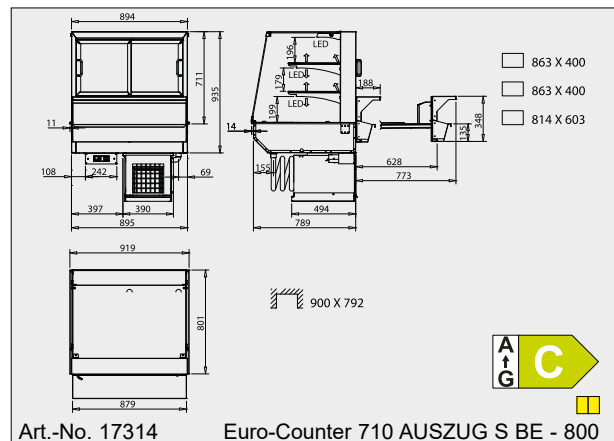


Art.-No. 17314

Euro-Counter 710 AUSZUG S BE - 800

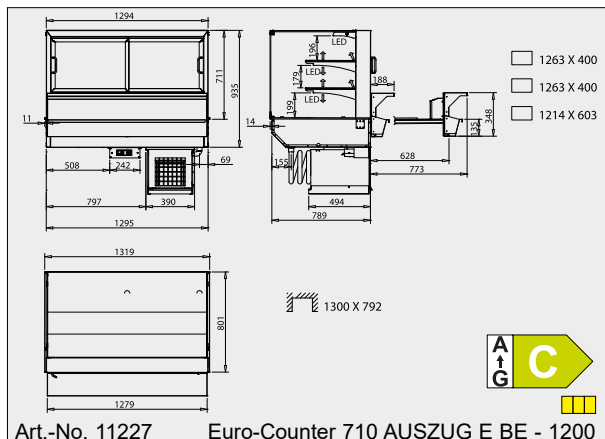

Art.-No. 11227

Euro-Counter 710 AUSZUG E BE - 1200

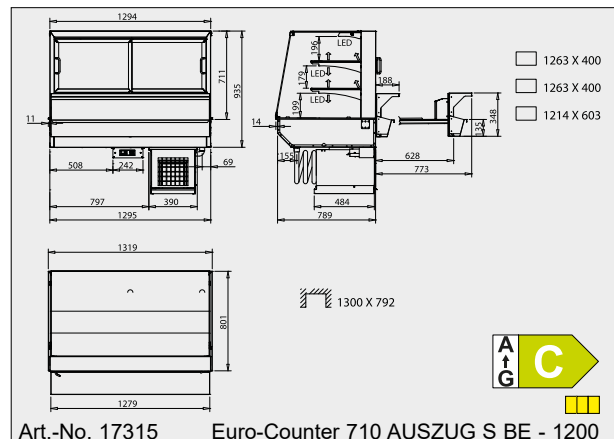

Art.-No. 17315

Euro-Counter 710 AUSZUG S BE - 1200

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area"