

5. Display Cases – refrigerated














for serve-over
















Front-Counter BE

Serve-over display case with outer casing made of stainless steel to place onto the counter construction (without mounting lip)



Front-Counter 520 BE	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10°ET]	Connection	
	 round	 angular	 slanted	 round	 angular	 slanted					
Serve-over version Height glass top 520 mm											
Front-Counter 520 BE - GN 2 *	23201	23061	23081	23211	23071	23091	750	702	370 W	230V/325W	
Front-Counter 520 BE - GN 3	23203	23063	23083	23213	23073	23093	1075	702	370 W	230V/340W	
Front-Counter 520 BE - GN 4	23204	23064	23084	23214	23074	23094	1400	702	450 W	230V/400W	
Front-Counter 520 BE - EN 800 **	23207	23067	23087	23217	23077	23097	922	795	370 W	230V/350W	
Front-Counter 520 BE - DT EN 800	33115	33116	33117	33118	33119	33120	922	795	370 W	230V/350W	
Front-Counter 520 BE - EN 1200	23208	23068	23088	23218	23078	23098	1322	795	450 W	230V/400W	
Front-Counter 520 BE - EN 1600	23239	23243	23247	23241	23245	23249	1722	795	605 W	230V/500W	

The FRESHNESS SYSTEM (circulated air disinfection), WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm. ** Max. opening width of the sliding door approx. 360 mm.

Front-Counter 710 BE	For external cooling unit incl. controller			With cooling unit and controller			Width [mm]	Depth [mm]	Cooling power [-10°ET]	Connection	
	 round	 angular	 slanted	 round	 angular	 slanted					
Serve-over version Height glass top 710 mm											
Front-Counter 710 BE - GN 2 *	23221	23021	23041	23231	23031	23051	750	702	370 W	230V/350W	
Front-Counter 710 BE - GN 3	23223	23023	23043	23233	23033	23053	1075	702	450 W	230V/380W	
Front-Counter 710 BE - GN 4	23224	23024	23044	23234	23034	23054	1400	702	605 W	230V/540W	
Front-Counter 710 BE - EN 800 **	23227	23027	23047	23237	23037	23057	922	795	450 W	230V/480W	
Front-Counter 710 BE - DT EN 800	33121	33122	33123	33124	33125	33126	922	795	450 W	230V/480W	
Front-Counter 710 BE - EN 1200	23228	23028	23048	23238	23038	23058	1322	795	605 W	230V/600W	
Front-Counter 710 BE - EN 1600	23240	23244	23248	23242	23246	23250	1722	795	825 W	230V/715W	

The FRESHNESS SYSTEM (circulated air disinfection), WiHA CLOUD CONTROL, protective machine cover and condensate pan/drain trap are available as accessories.
The version "DT" has wing doors on the operator side instead of sliding doors. * Max. opening width of the sliding door approx. 277 mm. ** Max. opening width of the sliding door approx. 360 mm.

Special Accessories

Condensate pan mounted under the cooling unit
Drain fitting 1 1/4" for connecting
to the customer's drain
Protective machine cover type 370–605
Protective machine cover type 825
Air cooler for operation with refrigerant CO₂
(see page 404)

Art.-No.
33266

3815
8179
8181
10197

Surcharge for WiHA CLOUD CONTROL

(not possible together with option "adjustable light colour")
Sliding door lockable
Wing door DT lockable
Option soft-close (soft-closing sliding doors)
Patented WiHA FRESHNESS SYSTEM see page 124.
Price label rails in GN dimensions, see page 136 and for price label rails in EN dimensions, see page 157.

Art.-No.
33577

10147
30005
4711

Description

Refrigerated display case with circulating air and outer casing made of stainless steel to place onto the counter construction (without mounting lip) for cooling cakes, cream cakes and snacks. The customer side has a rounded, angular or slanted glass construction made of safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953). Humidity: approx. 70% to 85%. Commercial product for the installation in stationary food and service counter.

Design

Construction, merchandise display, interior pan and exterior are made entirely of stainless steel material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean. Pressure-injected expanded polyurethane insulation (CFC-free). Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator is a merchandise display made of ground stainless steel material 1.4301. To clean the pan bottom, the merchandise display with circulating air evaporator and ventilators can be folded upwards and locked in the top position via gas pressure springs. For easy cleaning of the evaporator, it can be folded down (MOVE-DOWN FUNCTION) when the merchandise display is open. To clean the area behind the pan or to carry out servicing, the merchandise display can be moved forwards (MOVE-AWAY FUNCTION).

The front glass pane is made of safety glass and can be swung outwards for easy cleaning. The operator side has sliding doors made of insulating glass, easily removable for cleaning (without bottom rail). The side glass panes and height adjustable shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The shelves are suitable for Gastro-Norm or Euro-Norm dimensions (400 mm x 600 mm or 400 mm x 300 mm). A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m). **With WIHA-LONG-LIFE for a longer operating life of the cooling unit.**







For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

Cooling Unit Model



The cooling unit is encased in a stainless steel housing and is located beneath the cooling pan. It is easy to remove for servicing. A condensate pan is available as accessory.

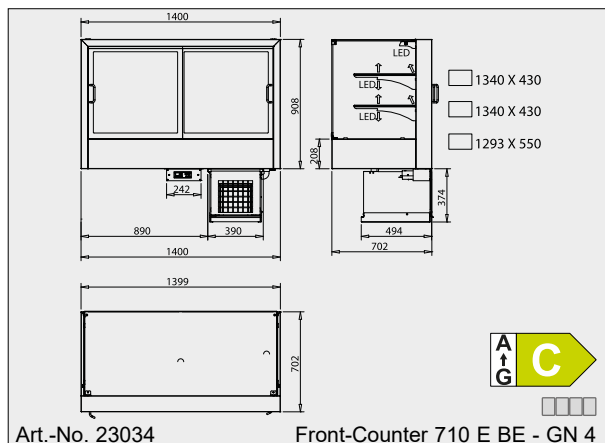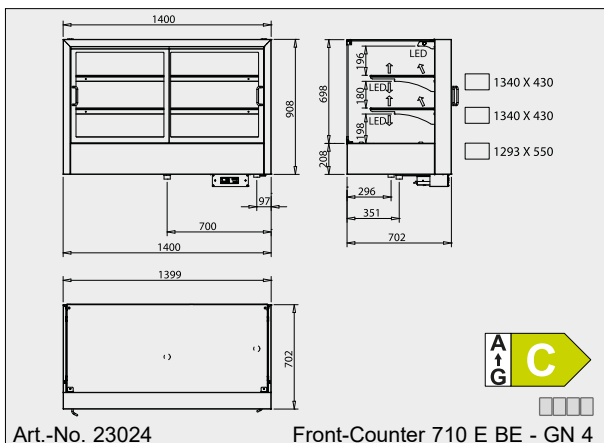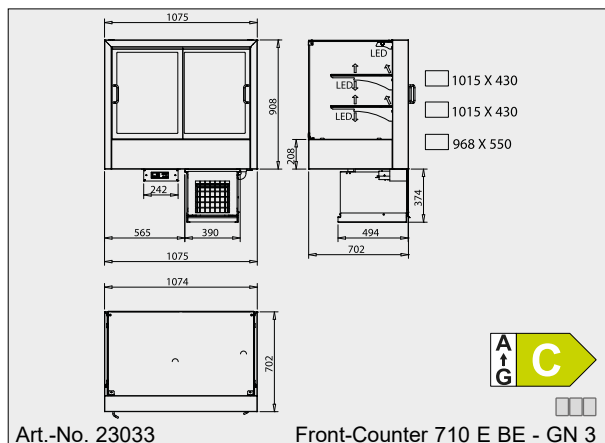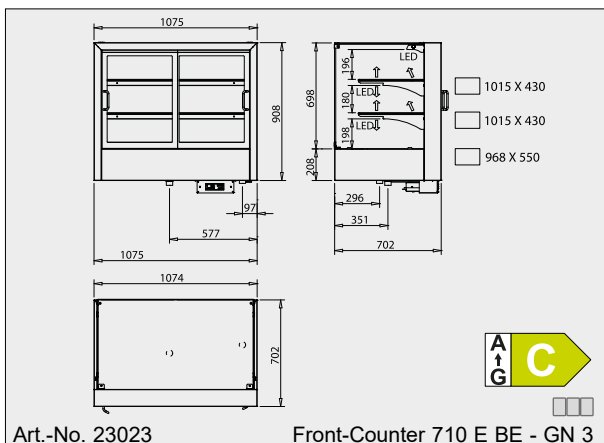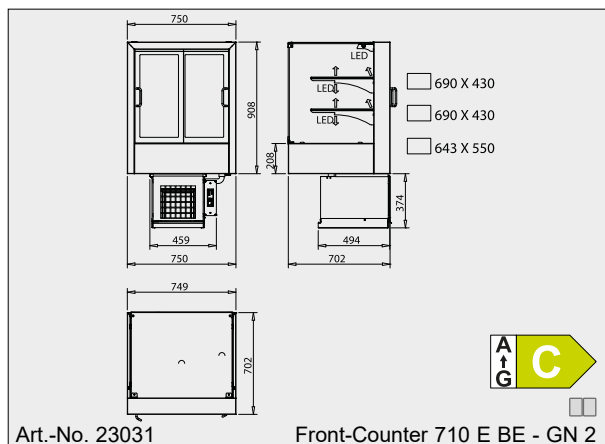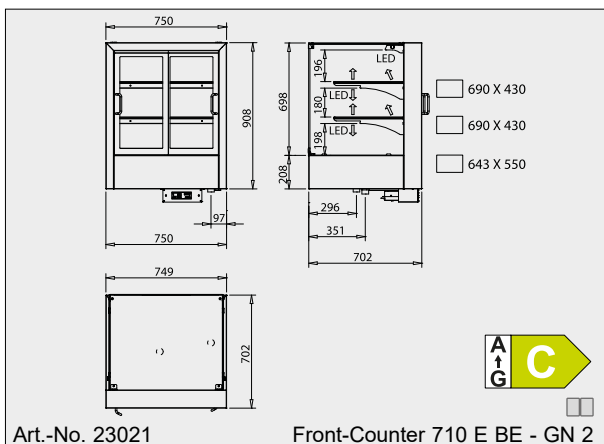







The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".

5. Display Cases – refrigerated

for serve-over

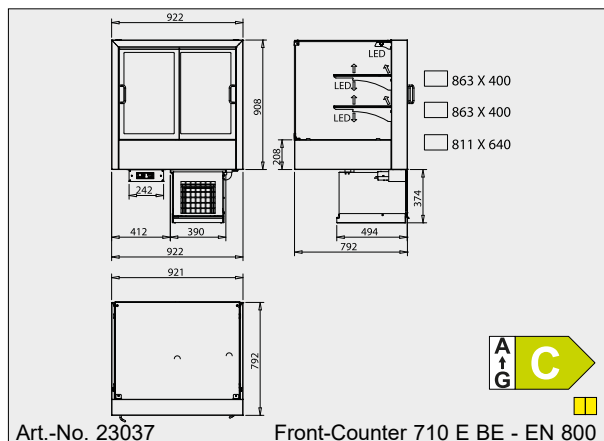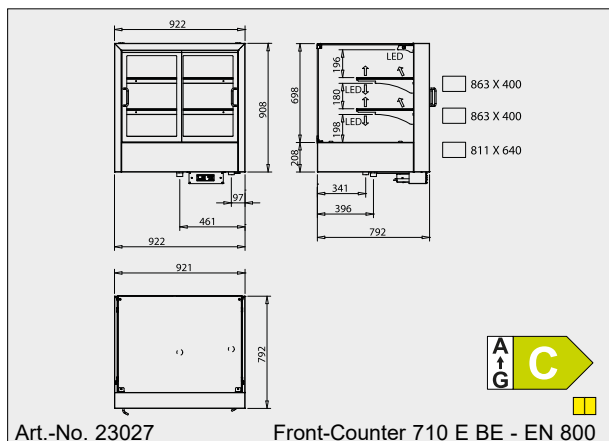

5
Serve-Over
Display Cases

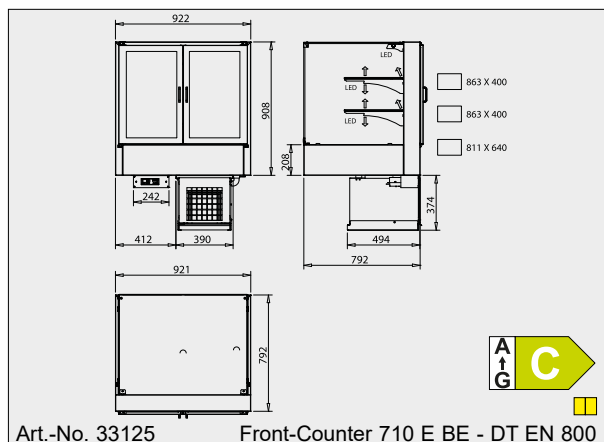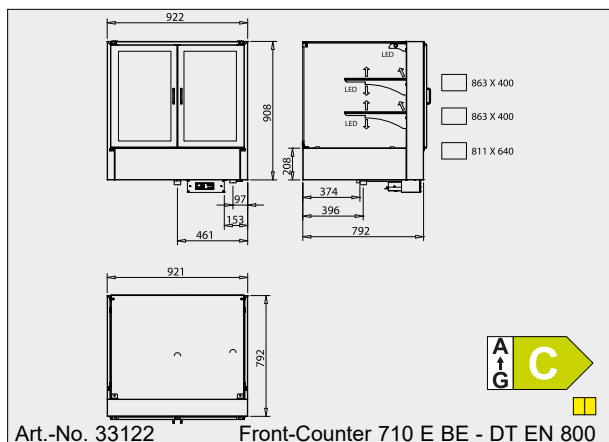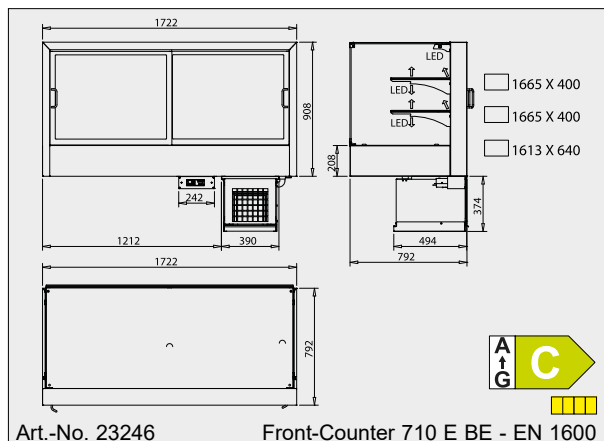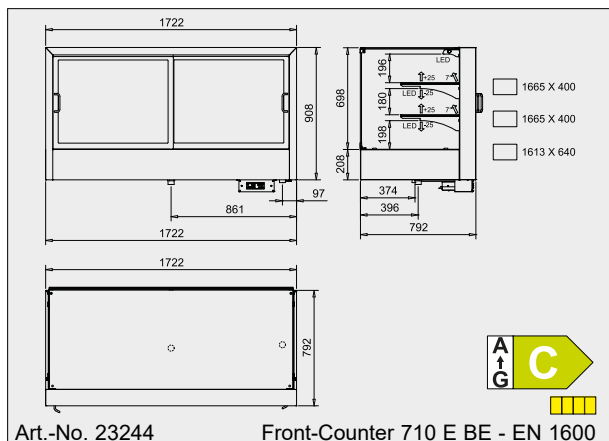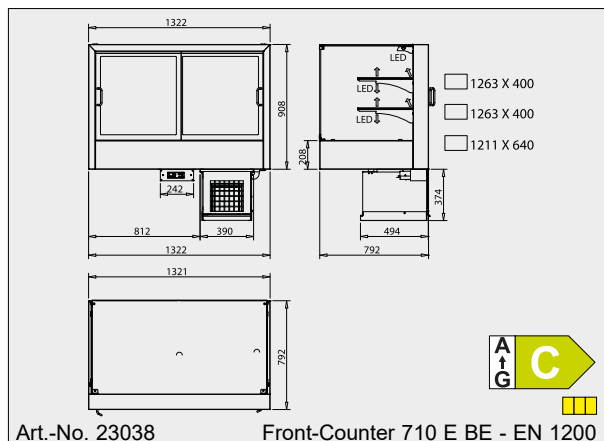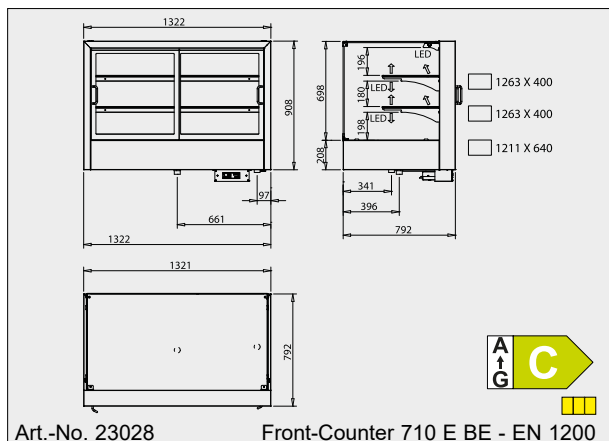

The drawings are shown with special accessory that is not included in the scope of delivery; more drawings are available on www.wiha-web.com under "Info Centre / Customer Area".