

CL




TECHNICAL SPECIFICATIONS:

- :: Input voltage: 120~277V AC
- :: CCT: 3000K and 5000K
- :: CRI: 84
- :: Lamp base: E26 medium base for CL-54W; E39 mogul base for CL-120W and CL-200W
- :: Chip: Samsung LED chips with Rubycon driver (200W with external Meanwell driver)
- :: Beam angle: 360°
- :: Operating Temp: 4°F~149°F

APPLICATIONS:

- :: Ideal for retrofitting existing HID highbay, shoebox, flood light or wall pack fixtures
- :: Can be used in enclosed luminaires

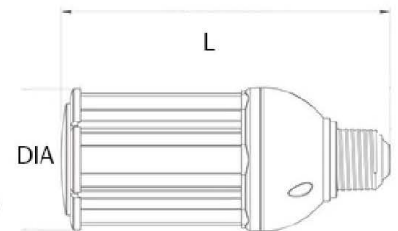

LED CORN LAMPS

CATALOG NO.	WATTS	BASE	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
CL-54W-50K-E39	54W	E39	7182LM	5000K	100~175 MH	10-1/2" (L) x 3-3/4" (Dia)
CL-54W-30K-E39	54W	E39	6696LM	3000K	100~175 MH	
CL-120W-50K-E39	120W	E39	15960LM	5000K	200~400 MH	12" (L) x 5-3/4" (Dia)
CL-120W-30K-E39	120W	E39	14880LM	3000K	200~400 MH	
CL-200W-50K	200W	E39	27200LM	5000K	320~400 MH	14-1/4" (L) x 5" (Dia)
CL-200W-50K-480V	200W	E39	27200LM	5000K	320~400 MH	

E39 MOGUL BASE

REDUCES E39 BULB TO BE USED IN E26 SOCKET

