# CRLC SERIES COMMERCIAL INDOOR LIGHTING



CRLC4-15W-MCT-D CRLC4-15W-MCT-D-WH

4" LED COMMERCIAL RECESSED LIGHT




Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

Customer Name:

Project Name:

Note:

Type:



7"(L) X 5 1/2" (D)

# **Features**

- 4" Haze & White Finish TRIM
- MCT: The switch is on the light engine
- Mounting Options: Recessed

- 5-Year Warranty
- Lifespan: 50,000 hrs.

# **Technical Specifications**

#### **Electrical:**

Voltage: 120-277VAC 50/60Hz

Wattage: 15WPower factor: >0.90Efficacy: 85 LPW

### Mechanical:

- 4" Haze & White Finish TRIM
- Mounting Options: Recessed
- Temperature Rating: Designed to operate in temperatures 113°F
- IC-Rated
- Suitable for Damp Locations
- 5-Year Warranty

## **Lighting:**

Selection:

- MCT: The switch is on the light engine
- Dimming: 0~10V Dimmable
- Total lumens: 1275LM
- Color temperature: 3000K/4000K/5000K
- Color rendering index: >80
- Lifespan: 50,000 hrs.

## **Applications:**

 Ideal for hotel, offices, retail outlets, restaurant, parking garages, conference room, education facilities and more.

#### Other Models:

- 20W | 1720LM | CRLC4-20W-MCT-D
- 20W | 1720LM | CRLC4-20W-MCT-D-WH














## Photometrics: CRLC4-15W-MCT-D





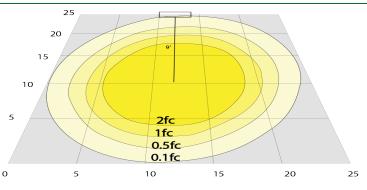

BUG Rating: B1-U1-G0

15W 5000K, Area 25" x 25' Mounting Height: 9'

## **Other Views:**











CRLC-TRM-4

CRLC4-15W-MCT-D

White







CRLC-TRM-4-WH



CRLC4-15W-MCT-D-WH

Performance Table: CRLC4-15W-MCT-D

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CRLC4-15W-MCT-D	15W	120-277V	1275LM	3000K 4000K 5000K	B1-U1-G0	85
CRLC4-15W-MCT-D-WH						

# Sample Ordering

Model	Watt	Dimming Housing
CRLC4	<b>–</b> 15W <b>–</b>	MCT - D -
		Blank WH = WHITE

### Accessory:

Blank = No Option For Accessories CRLC-468-RIBH-JB =CRLC Series Mounting Plate With Brackets And J- Box 4/6/8 in

## Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-CRLC = EXTERNAL EMERGENCY BACK UP BATTERY

#### Accessory:





### **Factory-Installed Option:**



**OPT-EM-CRLC** EXTERNAL EMERGENCY **BACK UP BATTERY** 

