LDS SERIES OUTDOOR LIGHTING LDS-MCT5-DT-PIR-BK

10 OUTDOOR/INDOOR LED DECORATIVE WALL SCONCE WITH PIR SENSOR








WESTGATE THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name:

Project Name:

Note:



Type:

7" x 10" x 3 1/4"

Features

- Multi CCT (Selectable Switch on the LED Board)
- Direct Replacement for Fluorescent
- Oil-Rubbed Bronze Finish

- 7-Year Warranty
- Housing: Steel base with Die-cast Rings
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity

Technical Specifications

Electrical:

Voltage: 120V AC 50/60Hz
Output Voltage: 36VDC
Power Factor: >0.90
Wattage: 15W

Efficacy: 65 LPW

Total Harmonic Distortion: ≤15 %

Lighting:

- Dimming: TRIAC Dimming (Using Standard TRIAC LED Dimmers)
- Total Lumens: 980LM
- Color Temperatures: 2700K/3000K/3500K/4000K/5000K
- Multi CCT (Selectable Switch on the LED Board)
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°

Mechanical:

- Oil-Rubbed Bronze Finish
- Housing: Steel base with Die-cast Rings
- 120V TRIAC Motion Sensor 100%-30% after 1 minute
- High-Transmission Frosted Plastic Lens With Excellent Distribution and Uniformity
- Maximum Ambient Temperature: 50~113°F
- Rated life: 50,000 Hrs
- Wet Location

Applications:

 Hallways, bedrooms, laundry rooms, bathrooms, alleys, Loading docks, doorway, pathway.

Other Models:

• 15W | 980LM | LDS-MCT5-DT-SIL
















Photometrics: LDS-MCT5-DT-PIR-ORB





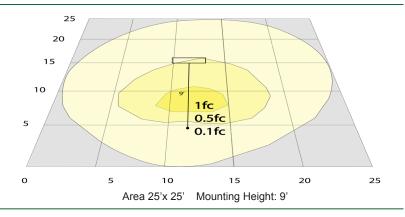

Other Views:







Side View Front View Back View

Performance Table: LDS-MCT5-DT-PIR-ORB

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|---------------------|---------|---------|--------|-------------------------------|------------|-----|
| LDS-MCT5-DT-PIR-ORB | 15W | 120V | 980LM | 2700K/3000K/3500K/4000K/5000K | B0-U3-G1 | 65 |

Sample Ordering

ModelColor Temp. Dimming SensorFinishLDS- MCT5- DT- PIR- ORB

Factory-Installed Option:

Blank = No Option For Accessories

OPT-EM-LDS = EMERGENCY BATTERY BACKUP

FACTORY-INSTALLED OPTION:







