


WG-20240930



3.5"(W) x 8.3"(H) x 2"(D)



3.5,

Rated Life: 50,000 Hrs

Lighting:

- Designed for compatibility with PAR20, PAR30, or PAR38 E26 medium base 120V Lamps
- Rotation: 358°

Applications:

- Retail Stores: Enhance product displays with adjustable lighting that draws attention and creates a welcoming shopping experience.
- Galleries and Museums: Showcase artwork with precision lighting that can be easily adjusted to suit different exhibits.
- Commercial Spaces: Provide flexible lighting solutions that can adapt to changing needs and layouts.





Customer Name:

Project Name:

Note:



Type:

6.6

ŝ **m**

TRE26-WH E26 Medium Socket Track Light Housing

TRE26-BK

TRE SERIES



This track light housing is designed for E26 medium base bulbs, providing versatile and efficient illumination options for commercial and residential applications. It features a durable construction and easy installation, making it compatible with standard track systems. The E26 socket supports a variety of bulb types, including LED, incandescent, and CFL, offering flexibility in lighting design while ensuring energy efficiency. Ideal for accent, task, or general lighting, this housing meets electrical safety standards and is perfect for adjustable and directional lighting needs

-eatures

- E26 Medium Socket Track Light Housing
- 3.5In Modern Par-Lamp Track Head 3-Wire

Technical Specifications

Electrical:

- Voltage: 120V AC 60Hz
- Power Factor: >0.95

Mechanical:


- Finish: Black. White
- 90° vertical adjustment, 358° rotation
- Effortlessly installed into H-Type single-circuit track
- Operating Temperature: -4°F to 104°F
- IP 20, Suitable for Indoor only
- 5-Year Warranty



Accessories:

Blank = No Option For Accessories TR-2FT-BK = 2Ft 3-Wire Track, Black TR-2FT-WH = 2Ft 3-Wire Track, White TR-4FT-BK = 4Ft 3-Wire Track. Black TR-4FT-WH = 4Ft 3-Wire Track, White TR-6FT-BK = 6Ft 3-Wire Track, Black TR-6FT-WH = 6Ft 3-Wire Track, White TR-8FT-BK = 8Ft 3-Wire Track, Black TR-8FT-WH = 8Ft 3-Wire Track, White TR-LE-BK = 3-Wire Track Live End, Black TR-LE-WH = 3-Wire Track Live End, White TR-MC-BK = 3-Wire Track Mini Connector, Black TR-MC-WH = 3-Wire Track Mini Connector, White TR-SC- BK = 3-Wire Track Straight Connector, Black TR-SC-WH = 3-Wire Track Straight Connector, White TR-LC-BK = 3-Wire Track L Connector, Black TR-LC-WH = 3-Wire Track L Connector, White

Accessories: TRE26

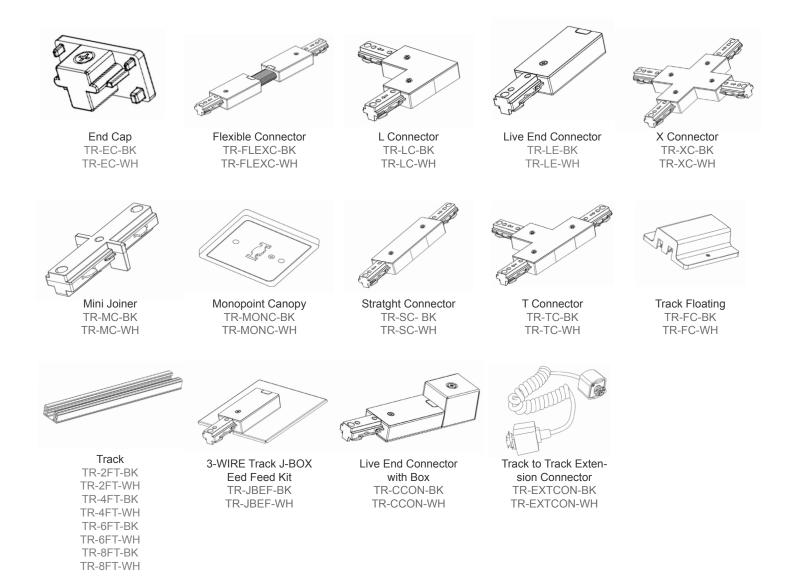

TR-TC-BK = 3-Wire Track T Connector, Black TR-TC-WH = 3-Wire Track T Connector, White TR-XC-BK = 3-Wire Track X Connector, Black

TR-XC-WH = 3-Wire Track X Connector, White

TR-FLEXC-BK = 3-Wire Track Flex Connector, Black

TR-FLEXC-WH = 3-Wire Track Flex Connector, White

TR-FC-BK = 3-Wire Track Floating Canopy, Black

TR-FC-WH = 3-Wire Track Floating Canopy, White

TR-MONC-BK = 3-Wire Track Mono Canopy, Black

TR-MONC-WH = 3-Wire Track Mono Canopy, White

TR-EC-BK = 3-Wire Track End Cap, Black

TR-EC-WH = 3-Wire Track End Cap, White

TR-JBEF-BK = 3-Wire Track J-Box End Feed Kit, Black

TR-JBEF-WH = 3-Wire Track J-Box End Feed Kit, White

TR-CCON-BK = 3-Wire Track Conduit Connector, Black

TR-CCON-WH = 3-Wire Track Conduit Connector, White

TR-EXTCON-BK = 3-Wire Track To Track Extension Connector, Black

TR-EXTCON-WH = 3-Wire Track To Track Extension Connector, White

TR-PENDKIT-BK = 3-Wire Track 3Ft Pendant Wiring Kit, Black

TR-PENDKIT-WH = 3-Wire Track 3Ft Pendant Wiring Kit, White

WESTGATE

