

# WMCS SERIES OUTDOOR LIGHTING

WMCS-UDL-RGBW-BK  
WMCS-UDL-RGBW-WH

Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_


Type: \_\_\_\_\_



Selection:



Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas

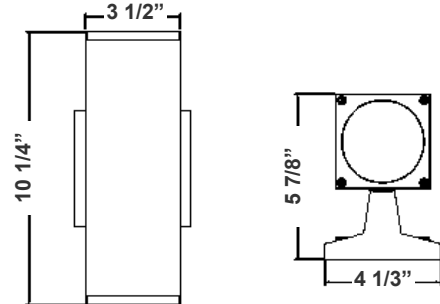

10 1/4"(H) x 3 1/2"(W) x 5 7/8"(D)

## Features

- Finish: Black & White
- Compatible with Westgate Smart App, Amazon Alexa, Amazon Echo, Google Home. Connects via WIFI or Bluetooth
- 7-Year Warranty
- Outdoor UP/Down Light

## Technical Specifications

### Electrical:

- Voltage: 120V AC
- Power Factor: >0.95
- Wattage: 12W (Down light); 24W (Up/Down light, 12W per end)
- Efficacy: 80 LPW
- THD: <20%

### Mechanical:

- This Fixture is Bluetooth mesh Enabled. Bluetooth mesh networking enables many-to-many (m:m) device communications and is optimized for creating large-scale device networks. It is ideally suited for control monitoring and automation solutions that require tens, hundreds or thousands of devices to communicate with one another
- Housing: Die-cast Aluminum & Glass
- Finish: Black & White
- Maximum Ambient Temperature: -68°F to 104°F
- Suitable for Wet Location
- 7-Year Warranty

### Lighting:



- Dimming: TRIAC Dimming
- RGBW: 15 Million Colors + 2700K~5000K White Tuning
- Total Lumens: 1920LM
- Color Rendering Index: CRI ≥ 80
- Beam angle: 45° for each side
- Rated life: 70,000 hrs

### Applications:


- Ideal for general site lighting, walkways, and stairways, alleys, loading docks, doorway, pathway and parking areas



## Photometrics: WMCS-UDL-RGBW

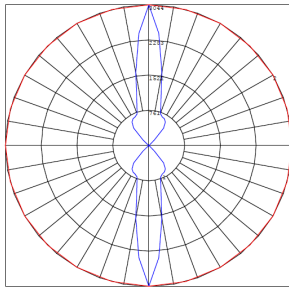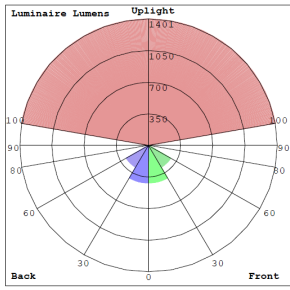

BUG Rating: B1-U5-G0

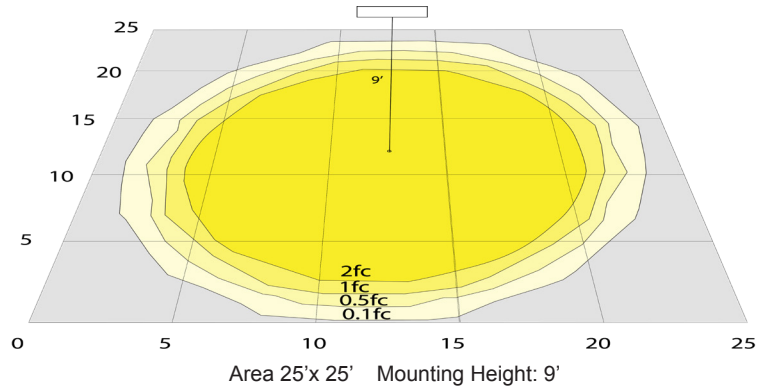

## Other Views:

Black Finish:



Side View



Front View



Back View



Lens View

White Finish:



Side View



Front View



Back View



Lens View

## Performance Table: WMCS-UDL-RGBW

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
WMCS-UDL-RGBW-BK	24W	120V	1920LM	RGBW	B1-U5-G0	80
WMCS-UDL-RGBW-WH	24W	120V	1920LM	RGBW	B1-U5-G0	80

## Sample Ordering

Model Light Direction Color Temp. Finish

WMCS - UDL - RGBW -

BK = Black  
WH = White

## Factory-Installed Option:

Blank = No Option For Accessories  
OPT-PC-B = FOR 120V-277V PHOTOCCELL  
OPT-EM-OD1INT = INTERNAL EMERGENCY BACK UP BATTERY

## Example:

1. WMCS-UDL-RGBW-WH (FOR WMCS 24W UP/DOWN LIGHT RGBW BRONZE FIXTURE 120V)
2. WMCS-UDL-RGBW-WH OPT-PC-B (FOR WMCS 24W UP/DOWN LIGHT RGBW BRONZE FIXTURE 120V)  
(FOR 120V-277V PHOTOCCELL)

## FACTORY-INSTALLED OPTION:



OPT-PC-B  
FOR 120V-277V PHOTOCCELL



OPT-EM-OD1INT  
INTERNAL EMERGENCY  
BACK UP BATTERY





**Westgate Smart**  
Download the Smart life App



- For Setting Up The Light(s), Initial Internet Connection or Mobile Data Is Required.
- After the Initial Setup, Internet Connection is not Necessary Anymore. The lights Can Be Controlled with The Mobile App on The Phone or Tablet. Features Such as Dimming, Changing Colors, Lights Scenes, etc.
- Scheduling Feature Requires Internet Connection.
- Bluetooth Devices Need a Gateway (Sold Separately) In Order to Connect to WiFi Network (Internet)

