



TED • EPT CENTRIFUGAL - TRASH

TED and **EPT** are self-priming, centrifugal full-trash pumps, with hand access inspection covers, manufactured by Tsurumi.



TED are powered by Honda 4-stroke, recoil start, petrol engines. They have the Oil Alert engine protection system fitted to prevent damage from inadequate lubrication during use with low oil, or while at an angle. All models have easy-carry frames, rubber feet (for engine noise and vibration absorption) and wing nuts for easy chamber access. Capable of pumping large volumes of water that contains sand, silt and suspended large solids, they are good for site drainage, land drainage, liquid waste removal, sewage and flood defence. A two wheeled trolley is also available as an optional extra.

EPT are powered by Yanmar diesel (L70), recoil or electric start, engines. Both models have easy-carry frames and rubber feet, for engine noise and vibration absorption. Capable of pumping large volumes of water that contains sand, silt and suspended large solids, they are good for site drainage, land drainage, liquid waste removal, sewage and flood defence. The **EPT3-80YDE** is electric start (with battery holder, but not battery) to ensure quick and effortless starting. A two wheeled trolley is also available as an optional extra.

Operating conditions: Maximum recommended suction lift: 6 mtrs | Oil alert engine protection

Fluid: Clean water | Dirty water | Water with solids

Application: Hire fleets | Construction | Drainage | Waste removal | Submerged litter

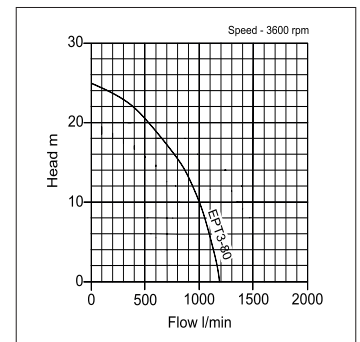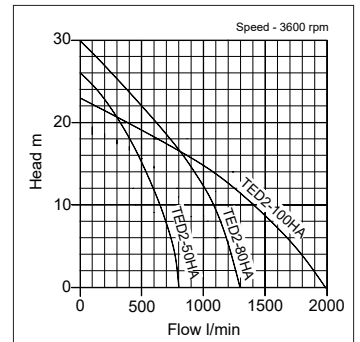

TED-EPT	Type	Fuel	Starting
	Centrifugal	Petrol & Diesel	Recoil & Electric Start

Pump	Inlet & outlet chamber	Inlet & outlet (TED)	Inlet & outlet (EPT)
	Cast aluminium	Steel	Cast aluminium & steel
	Pump body	Inspection cover	Wing nuts
	Cast aluminium	Cast aluminium	Cast iron
	Volute	Impeller	Mechanical seal
	Chromium iron	Chromium iron	Silicon carbide

Handling & Hose fittings	Frame	Trolley (optional)
	Tubular steel	Tubular steel & solid rubber wheels
	Included fittings	
	hose couplings, sealing washers, hose clips & strainer	



EPT3-80YDE



TED2-80HA with trolley



item code	model	inlet (mm)	outlet (mm)	engine	fuel	HP	oil alert	flow (l/min)	head (mtrs)	solids (mm)	w x l x h (mm)	dry weight (kgs)
18-20-1009	TED2-50HA	50	50	GX160	petrol	5.5	yes	800	26	25	430x570x400	33.0
18-20-1003	TED2-80HA	75	75	GX240	petrol	8	yes	1300	30	35	485x670x610	59.0
18-20-1014	TED2-100HA	100	100	GX340	petrol	10	yes	2000	23	35	480x725x610	69.0
18-20-1023	EPT3-80YD	75	75	L70	diesel	6.7	no	1150	27	31	485x680x620	79.0
18-20-1043	EPT3-80YDE	75	75	L70	diesel	6.7	no	1150	27	31	485x820x620	84.0
-	optional extra: site trolley											12.4