


**DIMENSIONS:**

3-1/2" (H) X 12" (D)

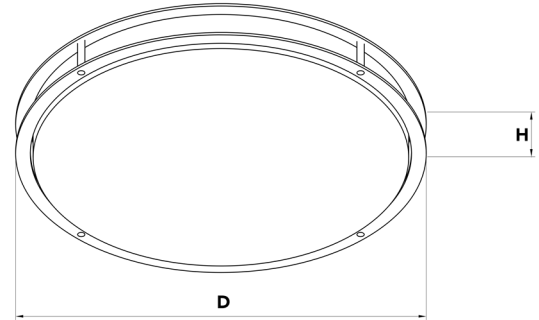

**FDL-12-MCT**

**LED DRUM FIXTURES**

The LED Flush Mount Surface Fixture is a low profile downlight intended for ceiling or wall mount applications. Driver on Board (DOB) technology, with no driver or transformer needed. These flush mount ceiling lights mount directly to a 4" deep dish junction box. Ideal for Residential and commercial applications.

**ELECTRICAL SPECIFICATIONS:**

- Voltage: 120VAC
- Wattage: 15W
- Power factor: >0.90
- Efficacy: 66LM/W

**HOUSING SPECIFICATIONS:**

- Construction: Spun aluminum + steel (brushed nickel finish)
- Gasket: closed cell Neoprene foam gasket
- Suitable for damp locations when gasket is used
- Maximum Ambient temperature: 104°F

**CERTIFICATIONS: ETL**



MODEL	WATTS	VOLTAGE	LUMENS	COLOR TEMP
FDL-12-MCT	15W	120VAC	1000LM	MCT

**LIGHTING SPECIFICATIONS:**

- Dimming: Dimmable down to 10% using an approved dimmer
- Optics: white translucent acrylic lens
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 1000LM
- Color temperature: Multi Color temp. with switch : 3000K,4000K,5000K
- CRI: >80

**WARRANTY: 5 years**

